

LOCATION MAP SCALE: 1"=400' SOURCE: TAX MAPS

TAX MAP NUMBER SECTION: 17 BLOCK: 1 LOT: 22.1, 22.2, 22.3, 22.4, 22.5, 22.6, 22.7, 22.8

DEED REFERENCE LIBER: 14568

PAGE: 351

TOTAL TRACT AREA 699,971± S.F. = 16.07 \pm ACRES

OWNER & APPLICANT DAVIDSON DRIVE HOLDINGS, LLC 99 FOREST ROAD UNIT 103 MONROE, NY 10950

DRAWING LIST

GENERAL	NOTES:

- 1. HOURS OF OPERATION: 8AM-6PM DAILY EXCEPT FOR

- HOURS OF OPERATION: 8AM-6PM DAILY EXCEPT FOR NATIONAL HOLIDAYS.
 THE PROJECT WILL NOT UTILIZE ANY PESTICIDES OR HERBICIDES ON THE SITE AND WILL NOT INCLUDE BULK STORAGE OF PETROLEUM, OTHER CHEMICALS OR ANY HAZARDOUS WASTE.
 ALL TRACTOR TRAILER DELIVERY VEHICLES ARE RESTRICTED TO RIGHT TURN IN AND LEFT TURN OUT ONLY.
 THE USE OF ENGINE BRAKES WITHIN THE PROJECT SITE IS PROHIBITED.


SHEET #	SHEET TITLE	ORIGINAL DATE / LAST REVISED DATE
01 OF 22	TITLE SHEET	03-21-22 / 08-07-23
02 OF 22	EXISTING CONDITIONS MAP	03-21-22 / 08-07-23
03 OF 22	SLOPE ANALYSIS	03-21-22 / 08-07-23
04 OF 22	SITE PLAN	03-21-22 / 08-07-23
05 OF 22	GRADING & UTILITY PLAN	03-21-22 / 08-07-23
06 OF 22	DRIVEWAY PROFILES	03-21-22 / 08-07-23
07 OF 22	SECTION A-A	03-21-22 / 08-07-23
08 OF 22	DRAINAGE PROFILES 1	03-21-22 / 08-07-23
09 OF 22	DRAINAGE PROFILES 2	03-21-22 / 08-07-23
10 OF 22	EROSION AND SEDIMENT CONTROL PLAN	03-21-22 / 08-07-23
11 OF 22	EROSION AND SEDIMENT CONTROL DETAILS	03-21-22 / 08-07-23
12 OF 22	LIGHTING PLAN	03-21-22 / 08-07-23
13 OF 22	LANDSCAPING PLAN	03-21-22 / 08-07-23
14 OF 22	LANDSCAPING DETAILS	03-21-22 / 08-07-23
15 OF 22	TRUCK TURNING DIAGRAM – WB67	03-21-22 / 08-07-23
16 OF 22	TRUCK TURNING DIAGRAM – WB67	03-21-22 / 08-07-23
17 OF 22	TRUCK TURNING DIAGRAM – WB67	03-21-22 / 08-07-23
18 OF 22	FIRETRUCK TURNING DIAGRAMS	03-21-22 / 08-07-23
19 OF 22	SDS DETAILS	03-21-22 / 08-07-23
20 OF 22	CONSTRUCTION DETAILS	03-21-22 / 08-07-23
21 OF 22	STORMWATER CONSTRUCTION DETAILS	03-21-22 / 08-07-23
22 OF 22	HABITAT PROTECTION PLAN	03-21-22 / 08-07-23

WARNING- IT IS A VIOLATION OF NEW YORK EDUCATIONAL LAW, SECTION 7209.2, FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR, TO ALTER THIS DOCUMENT IN ANY WAY. IF ALTERED, THE ALTERING PERSON SHALL COMPLY WITH THE REQUIREMENTS OF NEW YORK EDUCATIONAL LAW, SECTION 7209.2

ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED-SEAL COPIES MAY CONTAIN UNAUTHORIZED AND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS

ND CHANGES.


SITE PLAN & LOT LINE COMBINATION FOR DAVIDSON DRIVE HOLDINGS, LLC LAKE STATION ROAD TOWN OF CHESTER, ORANGE COUNTY, NY.

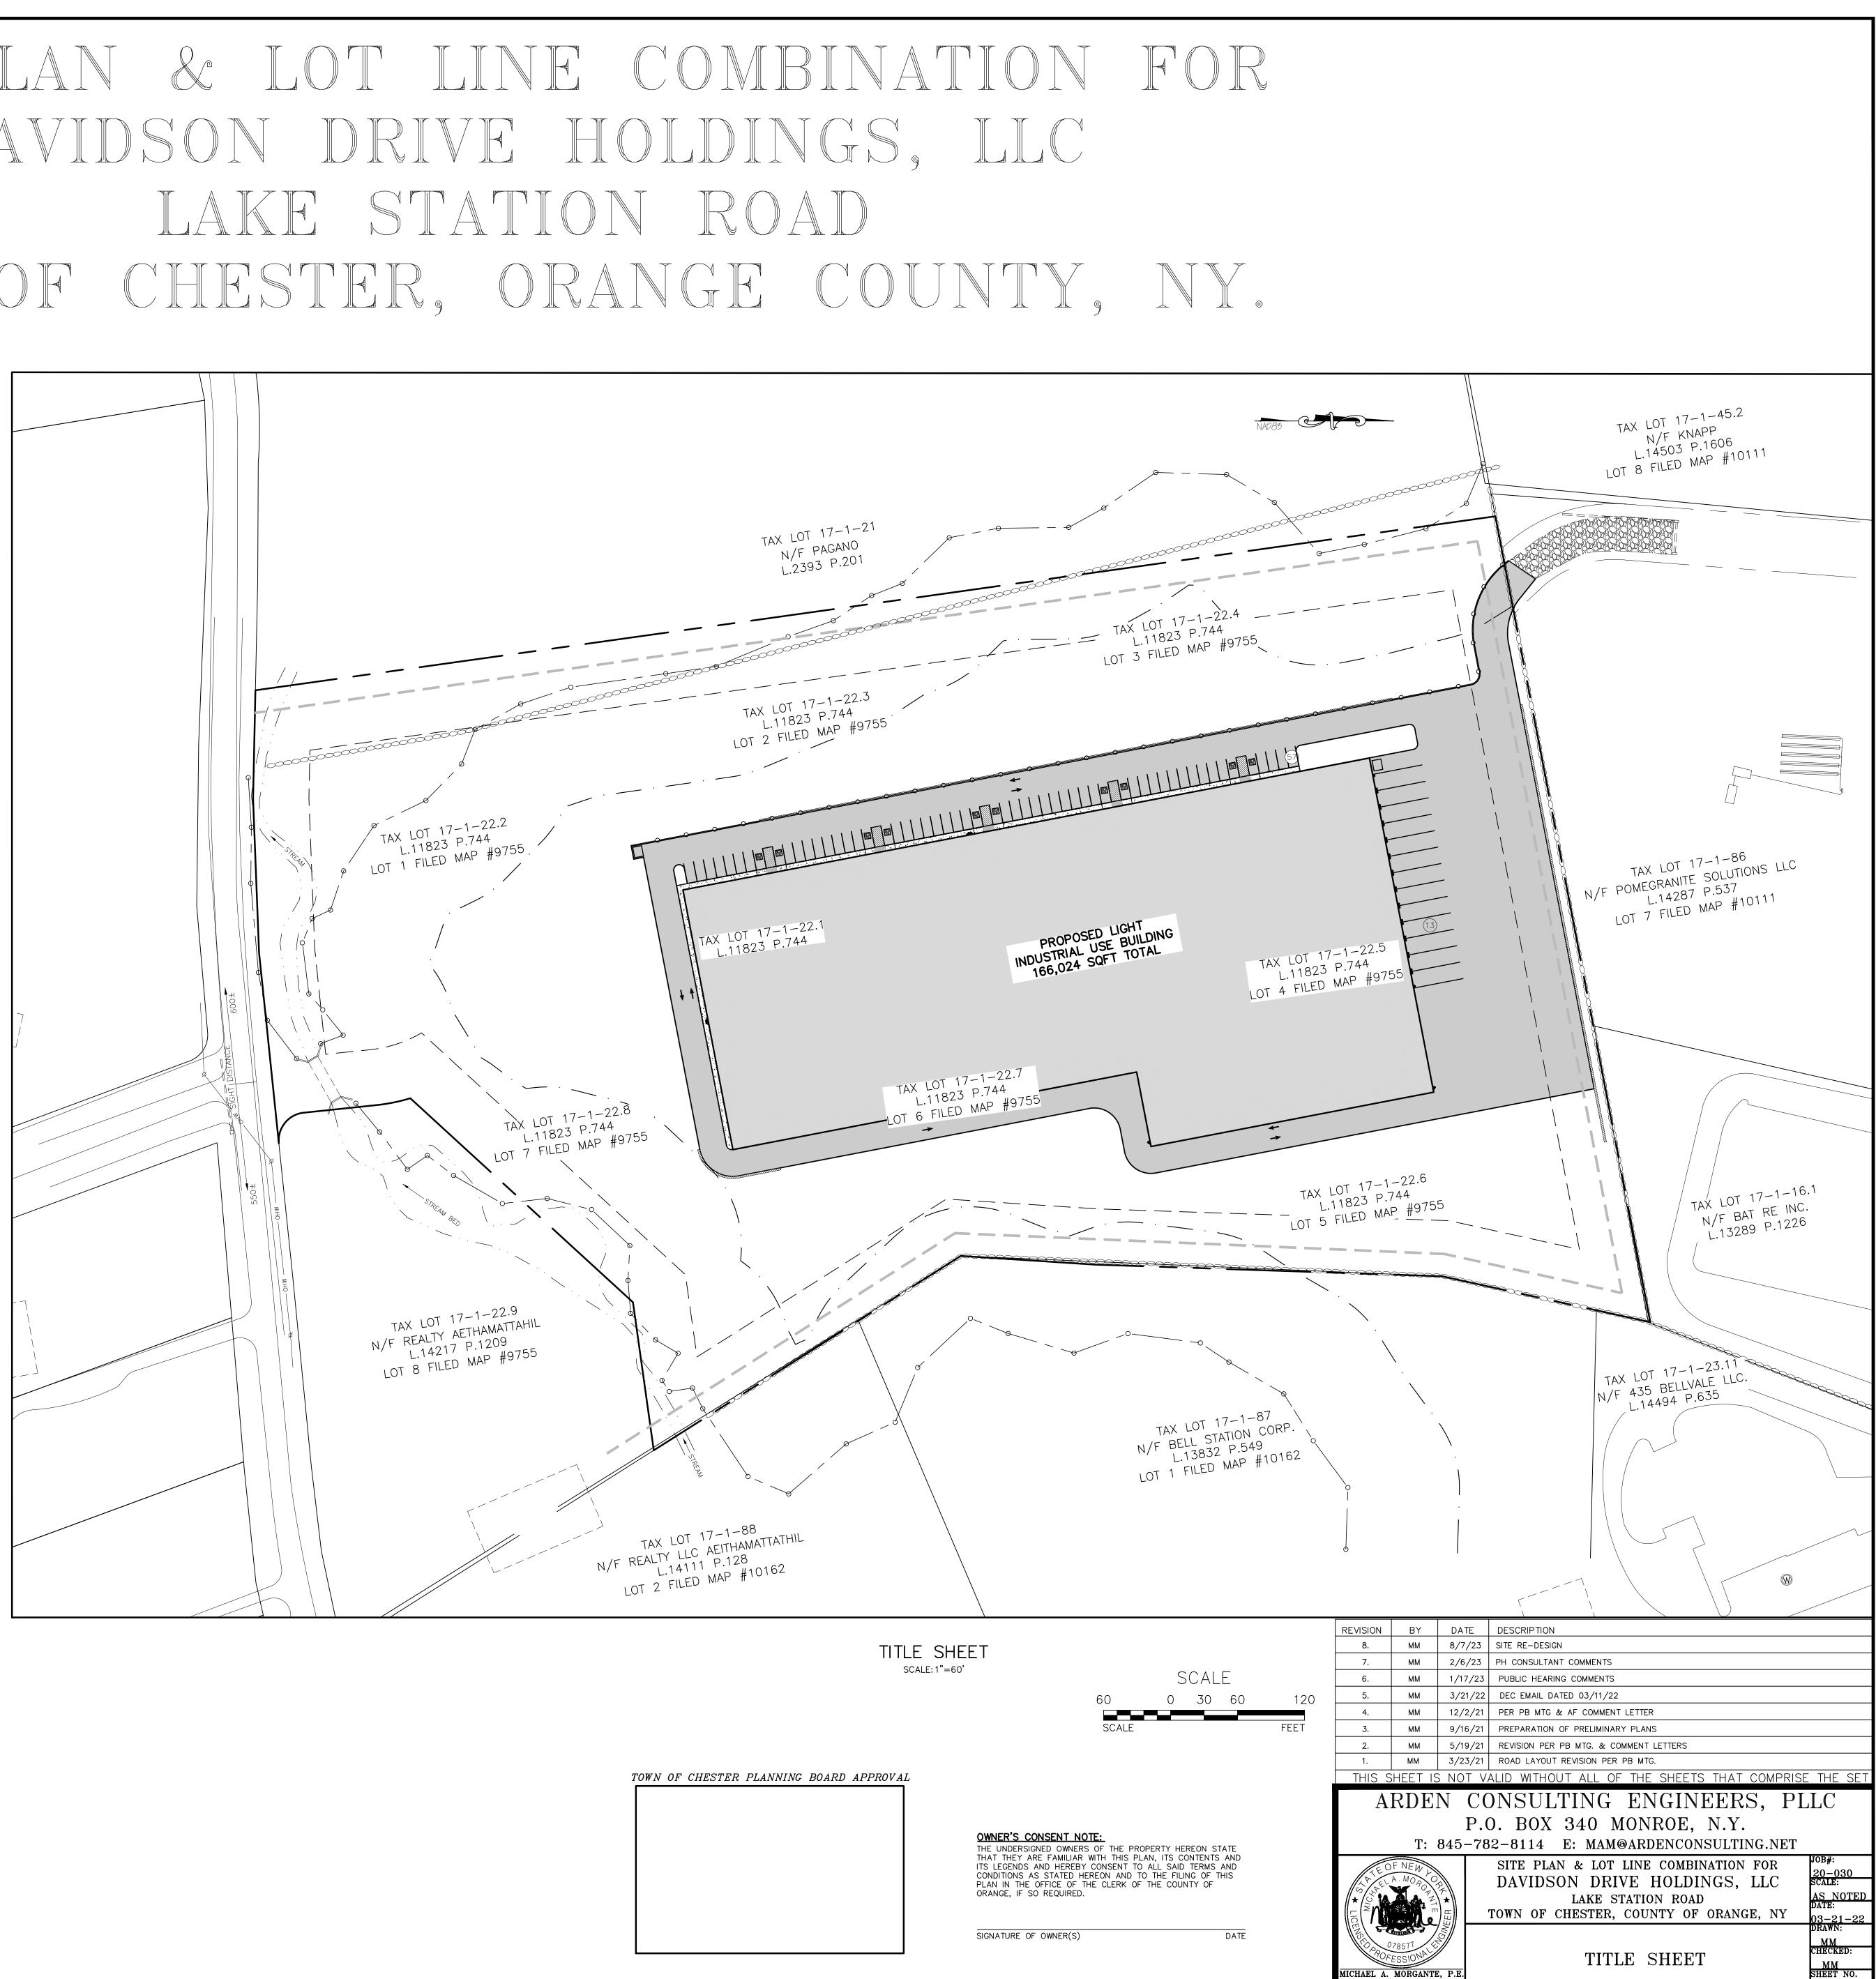



COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. - ALL RIGHTS RESERVED

LIC. NO. 78577


01 OF 22

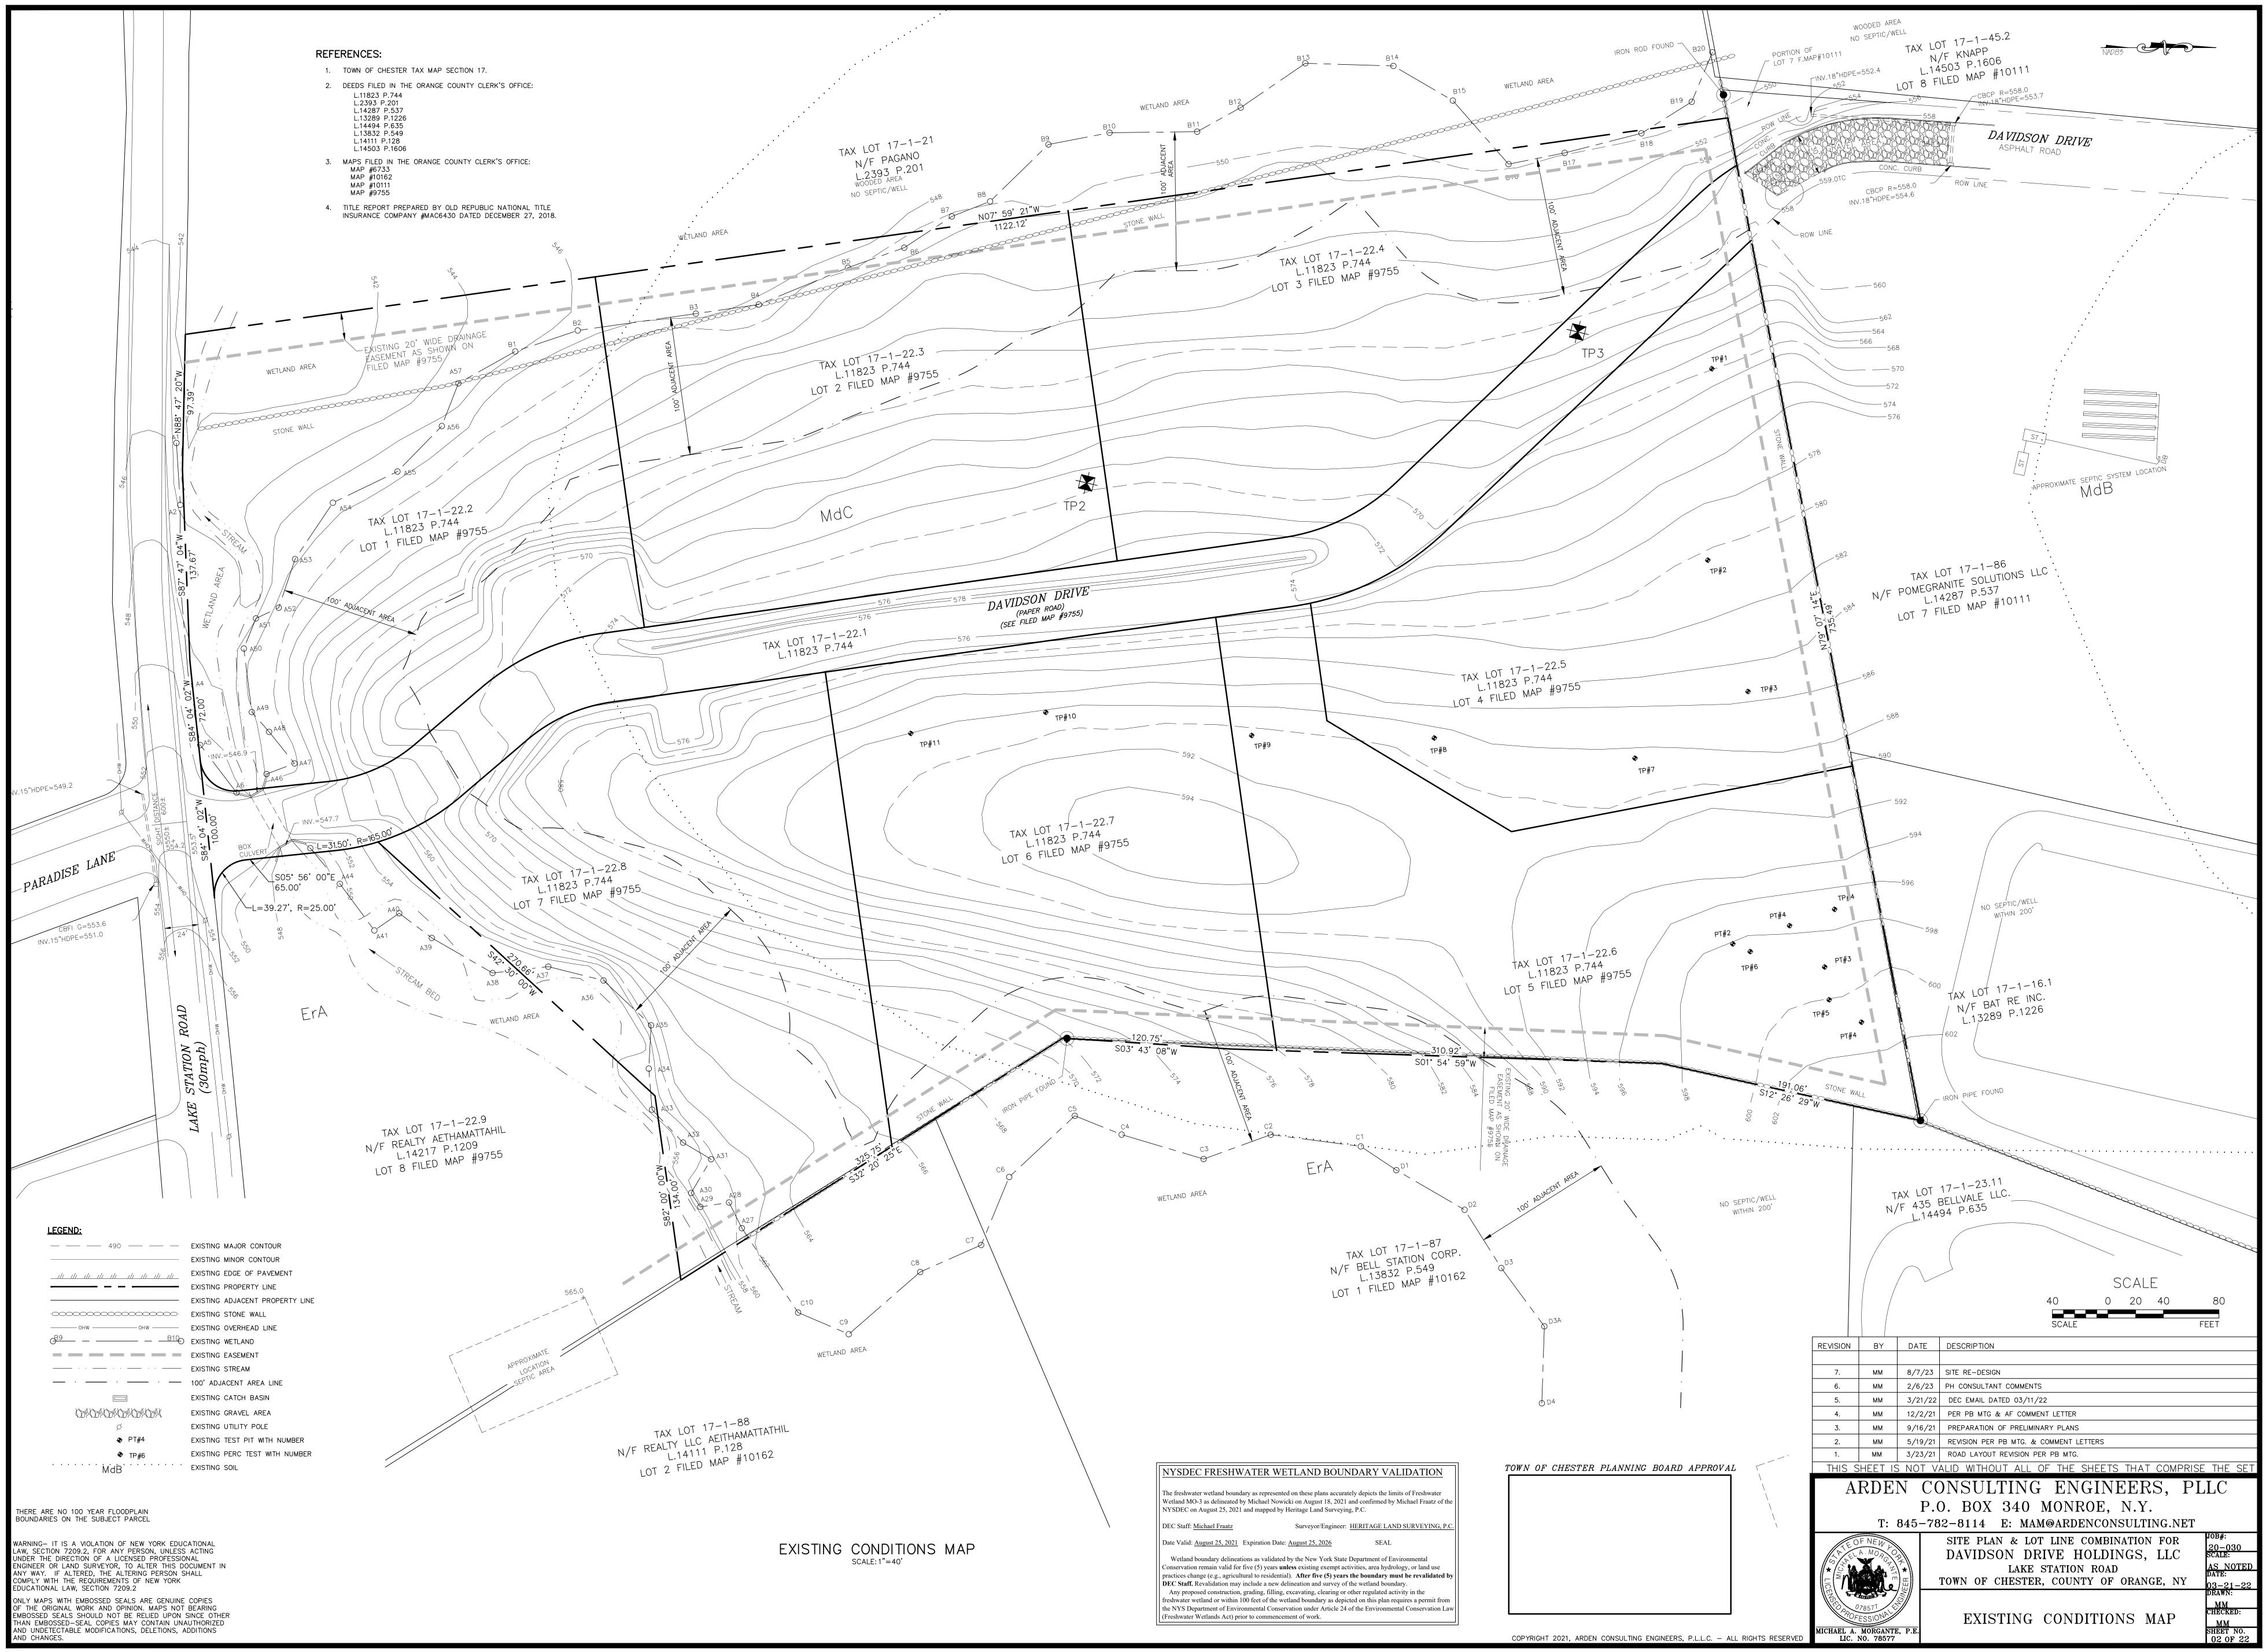

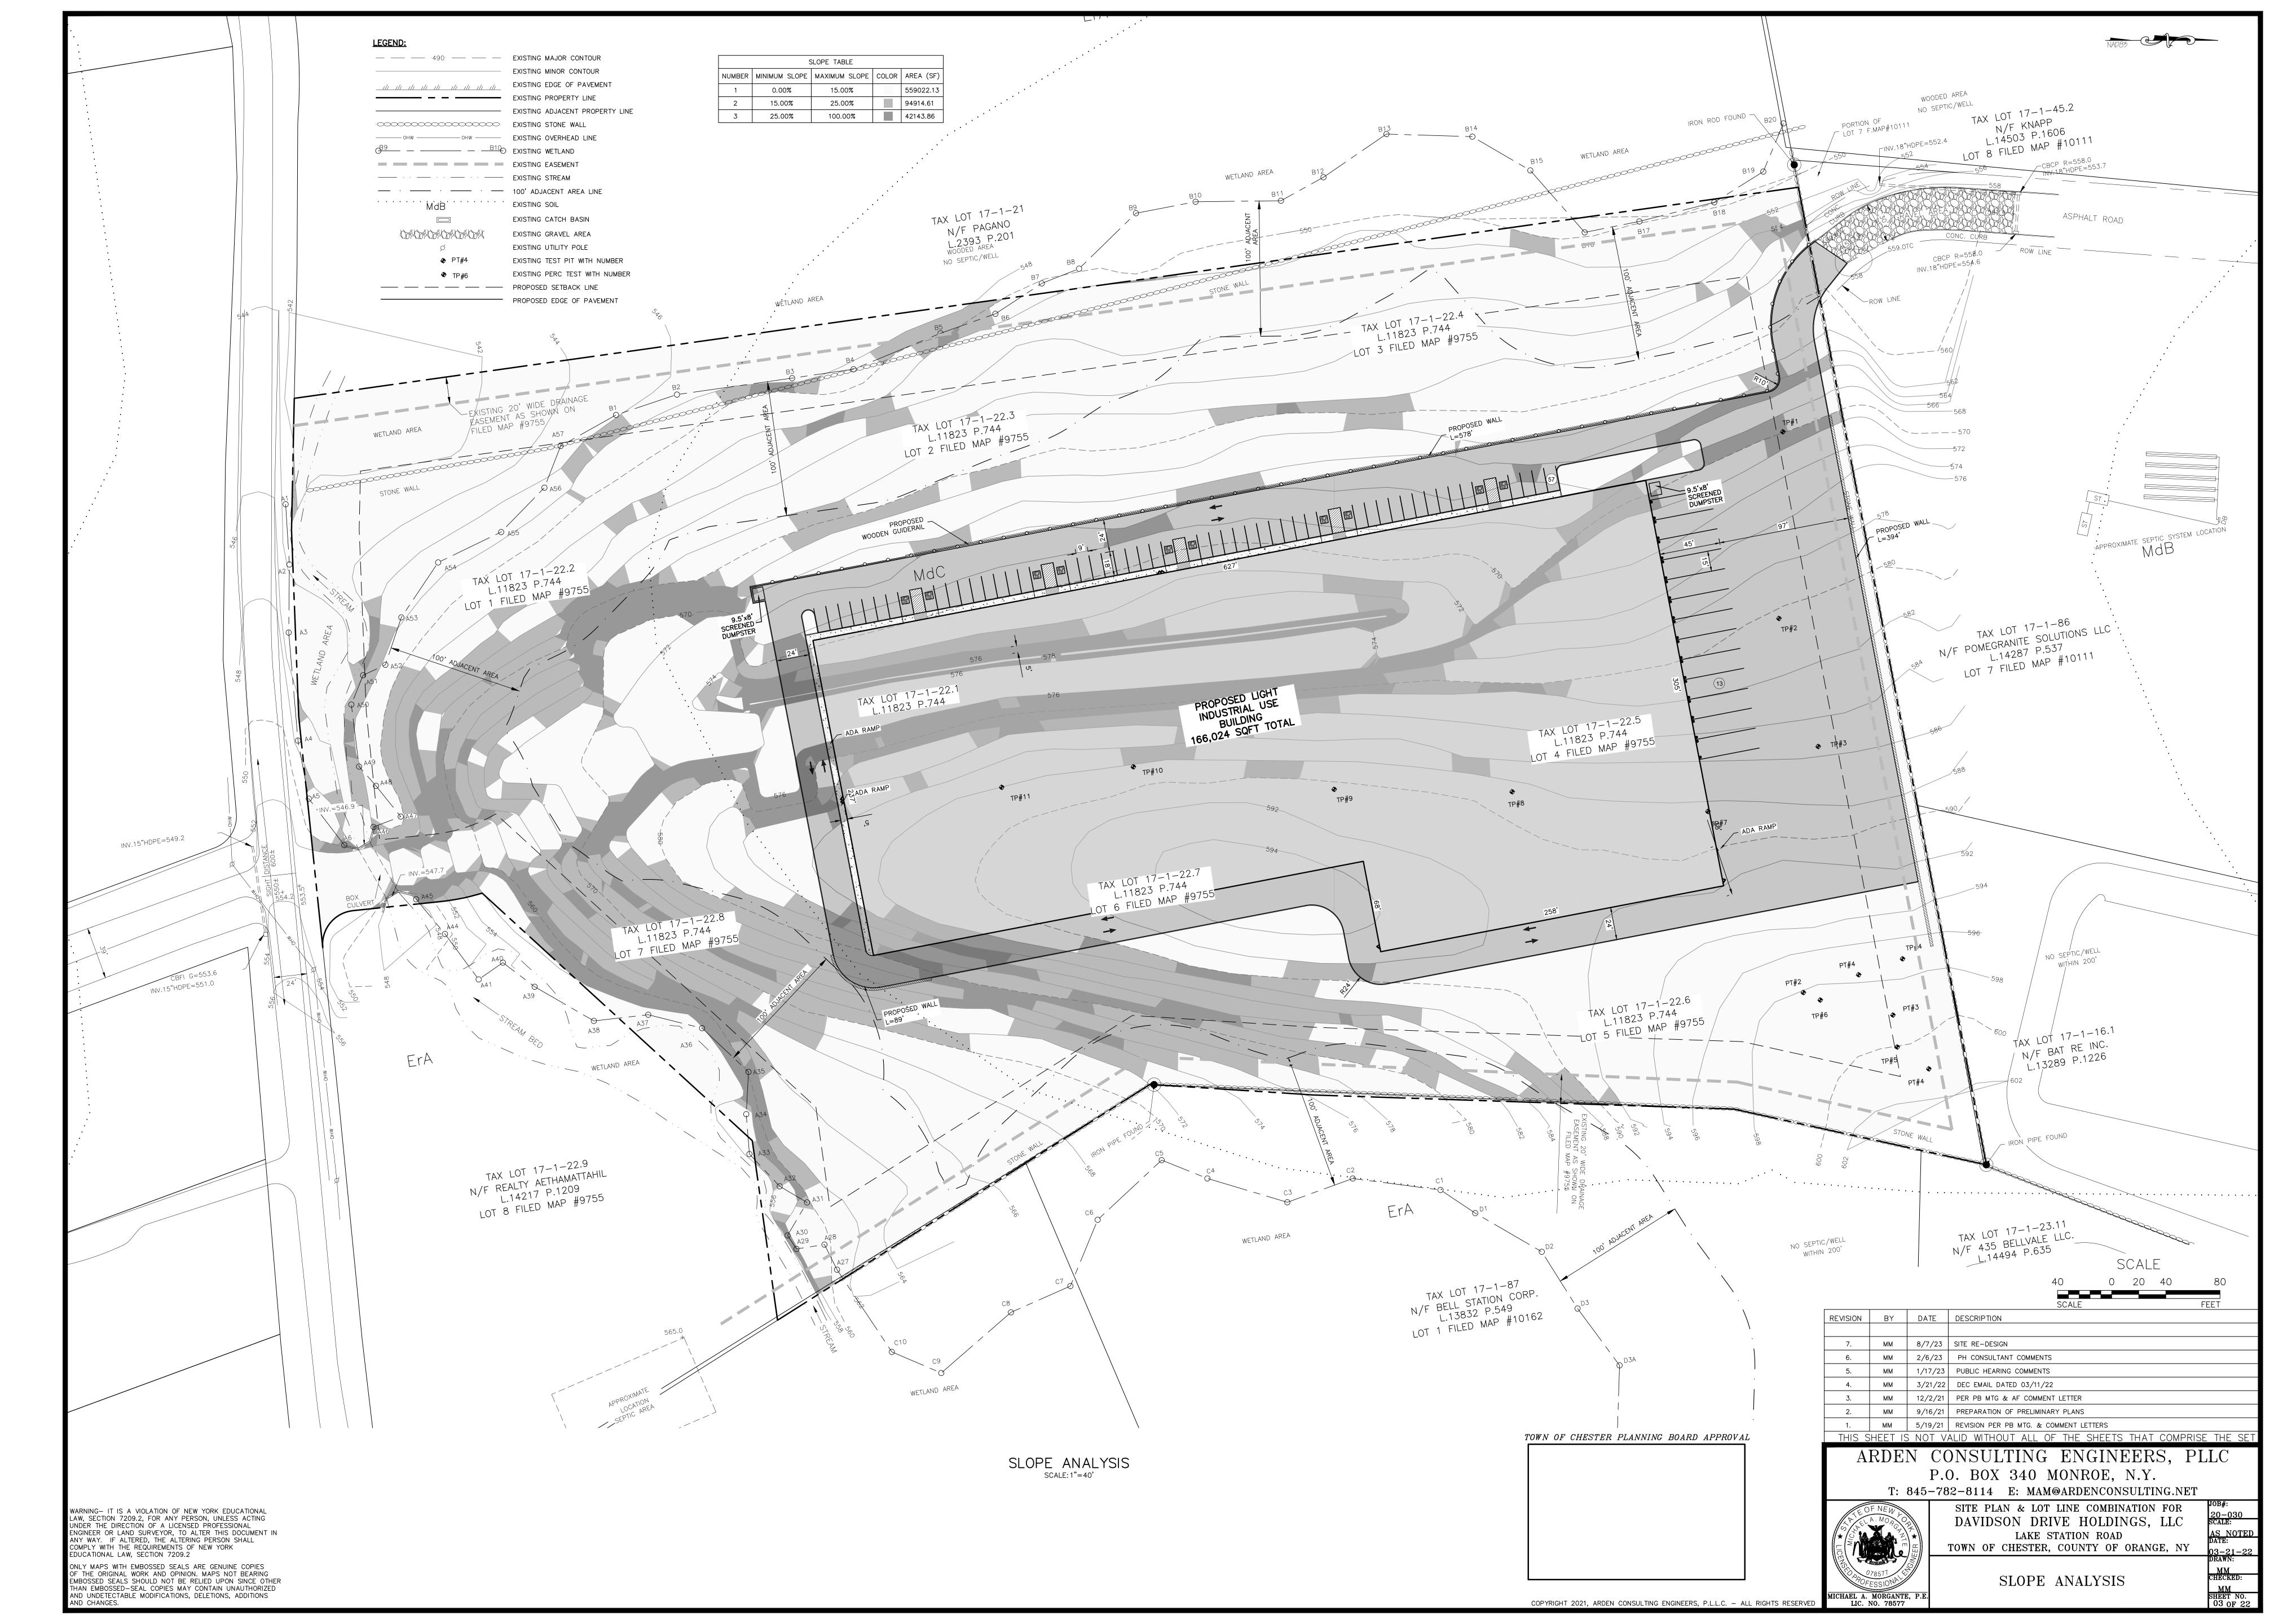

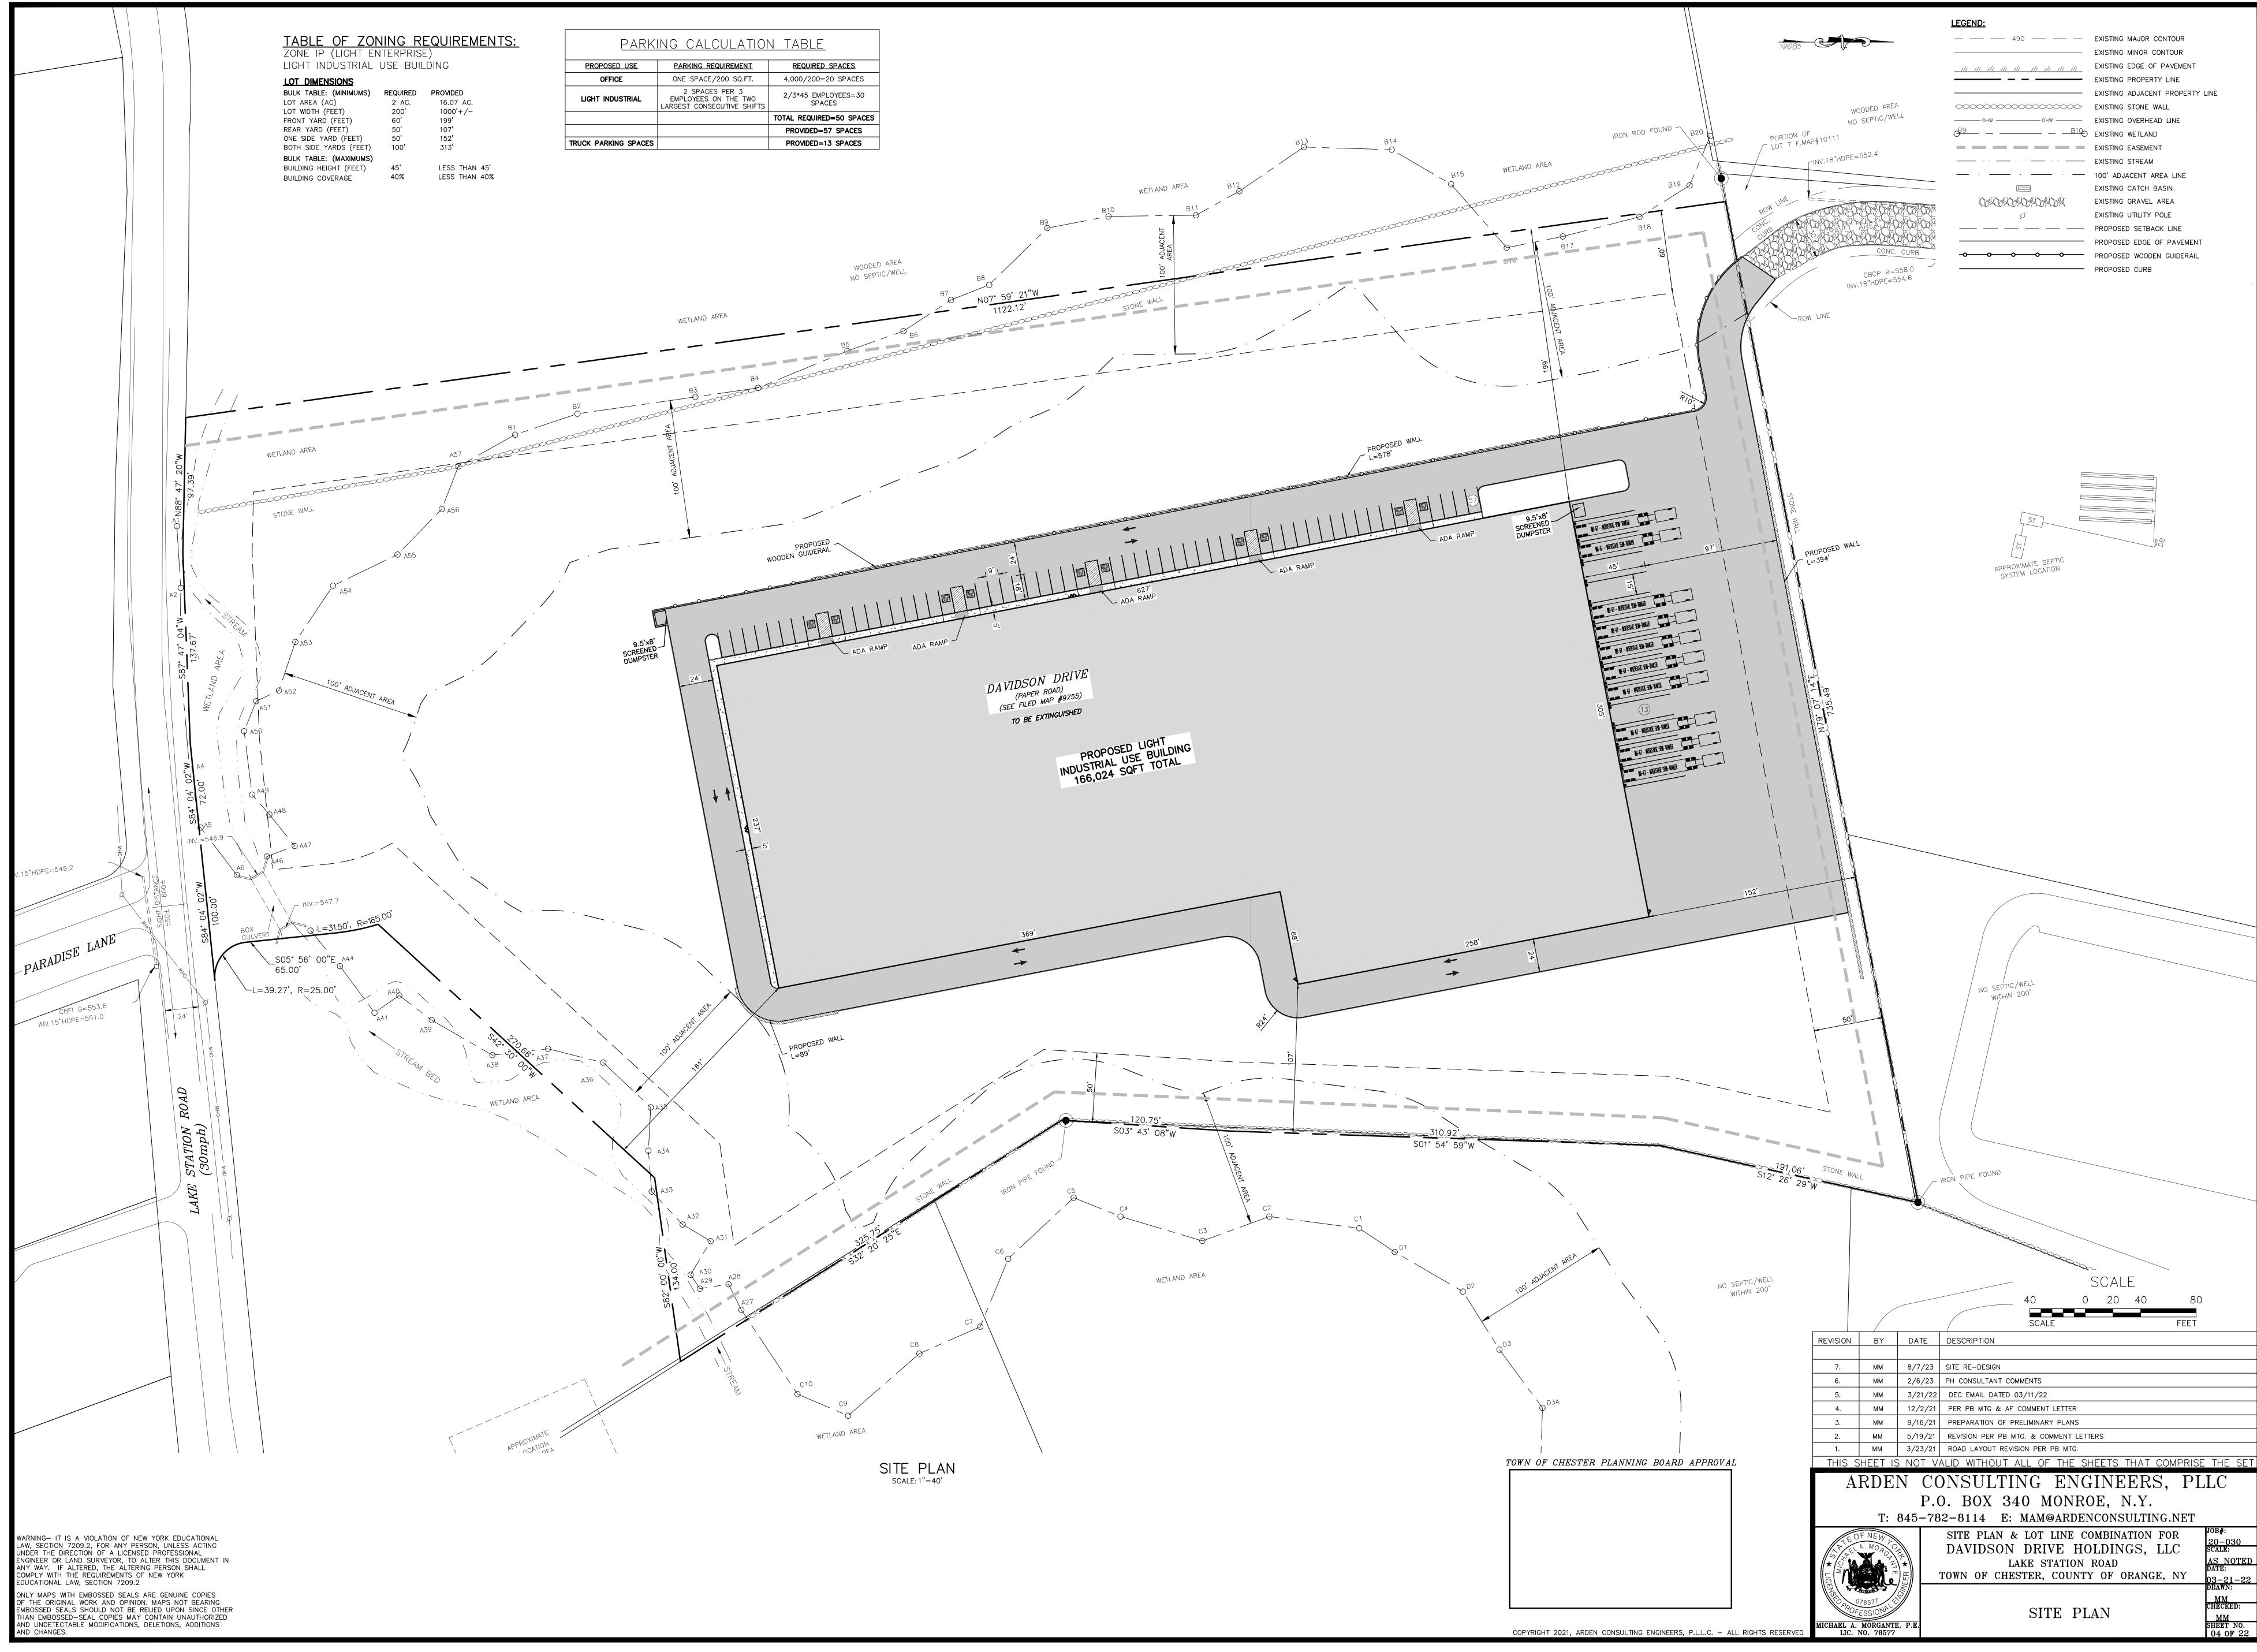


).	EXISTING MAJOR CONTOUR
	EXISTING MINOR CONTOUR
	EXISTING EDGE OF PAVEMENT
	EXISTING PROPERTY LINE
	EXISTING ADJACENT PROPERTY LINE
	EXISTING STONE WALL
OHW	EXISTING OVERHEAD LINE
<u> </u>	EXISTING WETLAND
	EXISTING EASEMENT
· · · ·	EXISTING STREAM
·	100' ADJACENT AREA LINE
	EXISTING CATCH BASIN
OR ADRADRA	EXISTING GRAVEL AREA
J	EXISTING UTILITY POLE
	PROPOSED SETBACK LINE
	PROPOSED EDGE OF PAVEMENT
~~~	PROPOSED WOODEN GUIDERAIL
	PROPOSED CURB

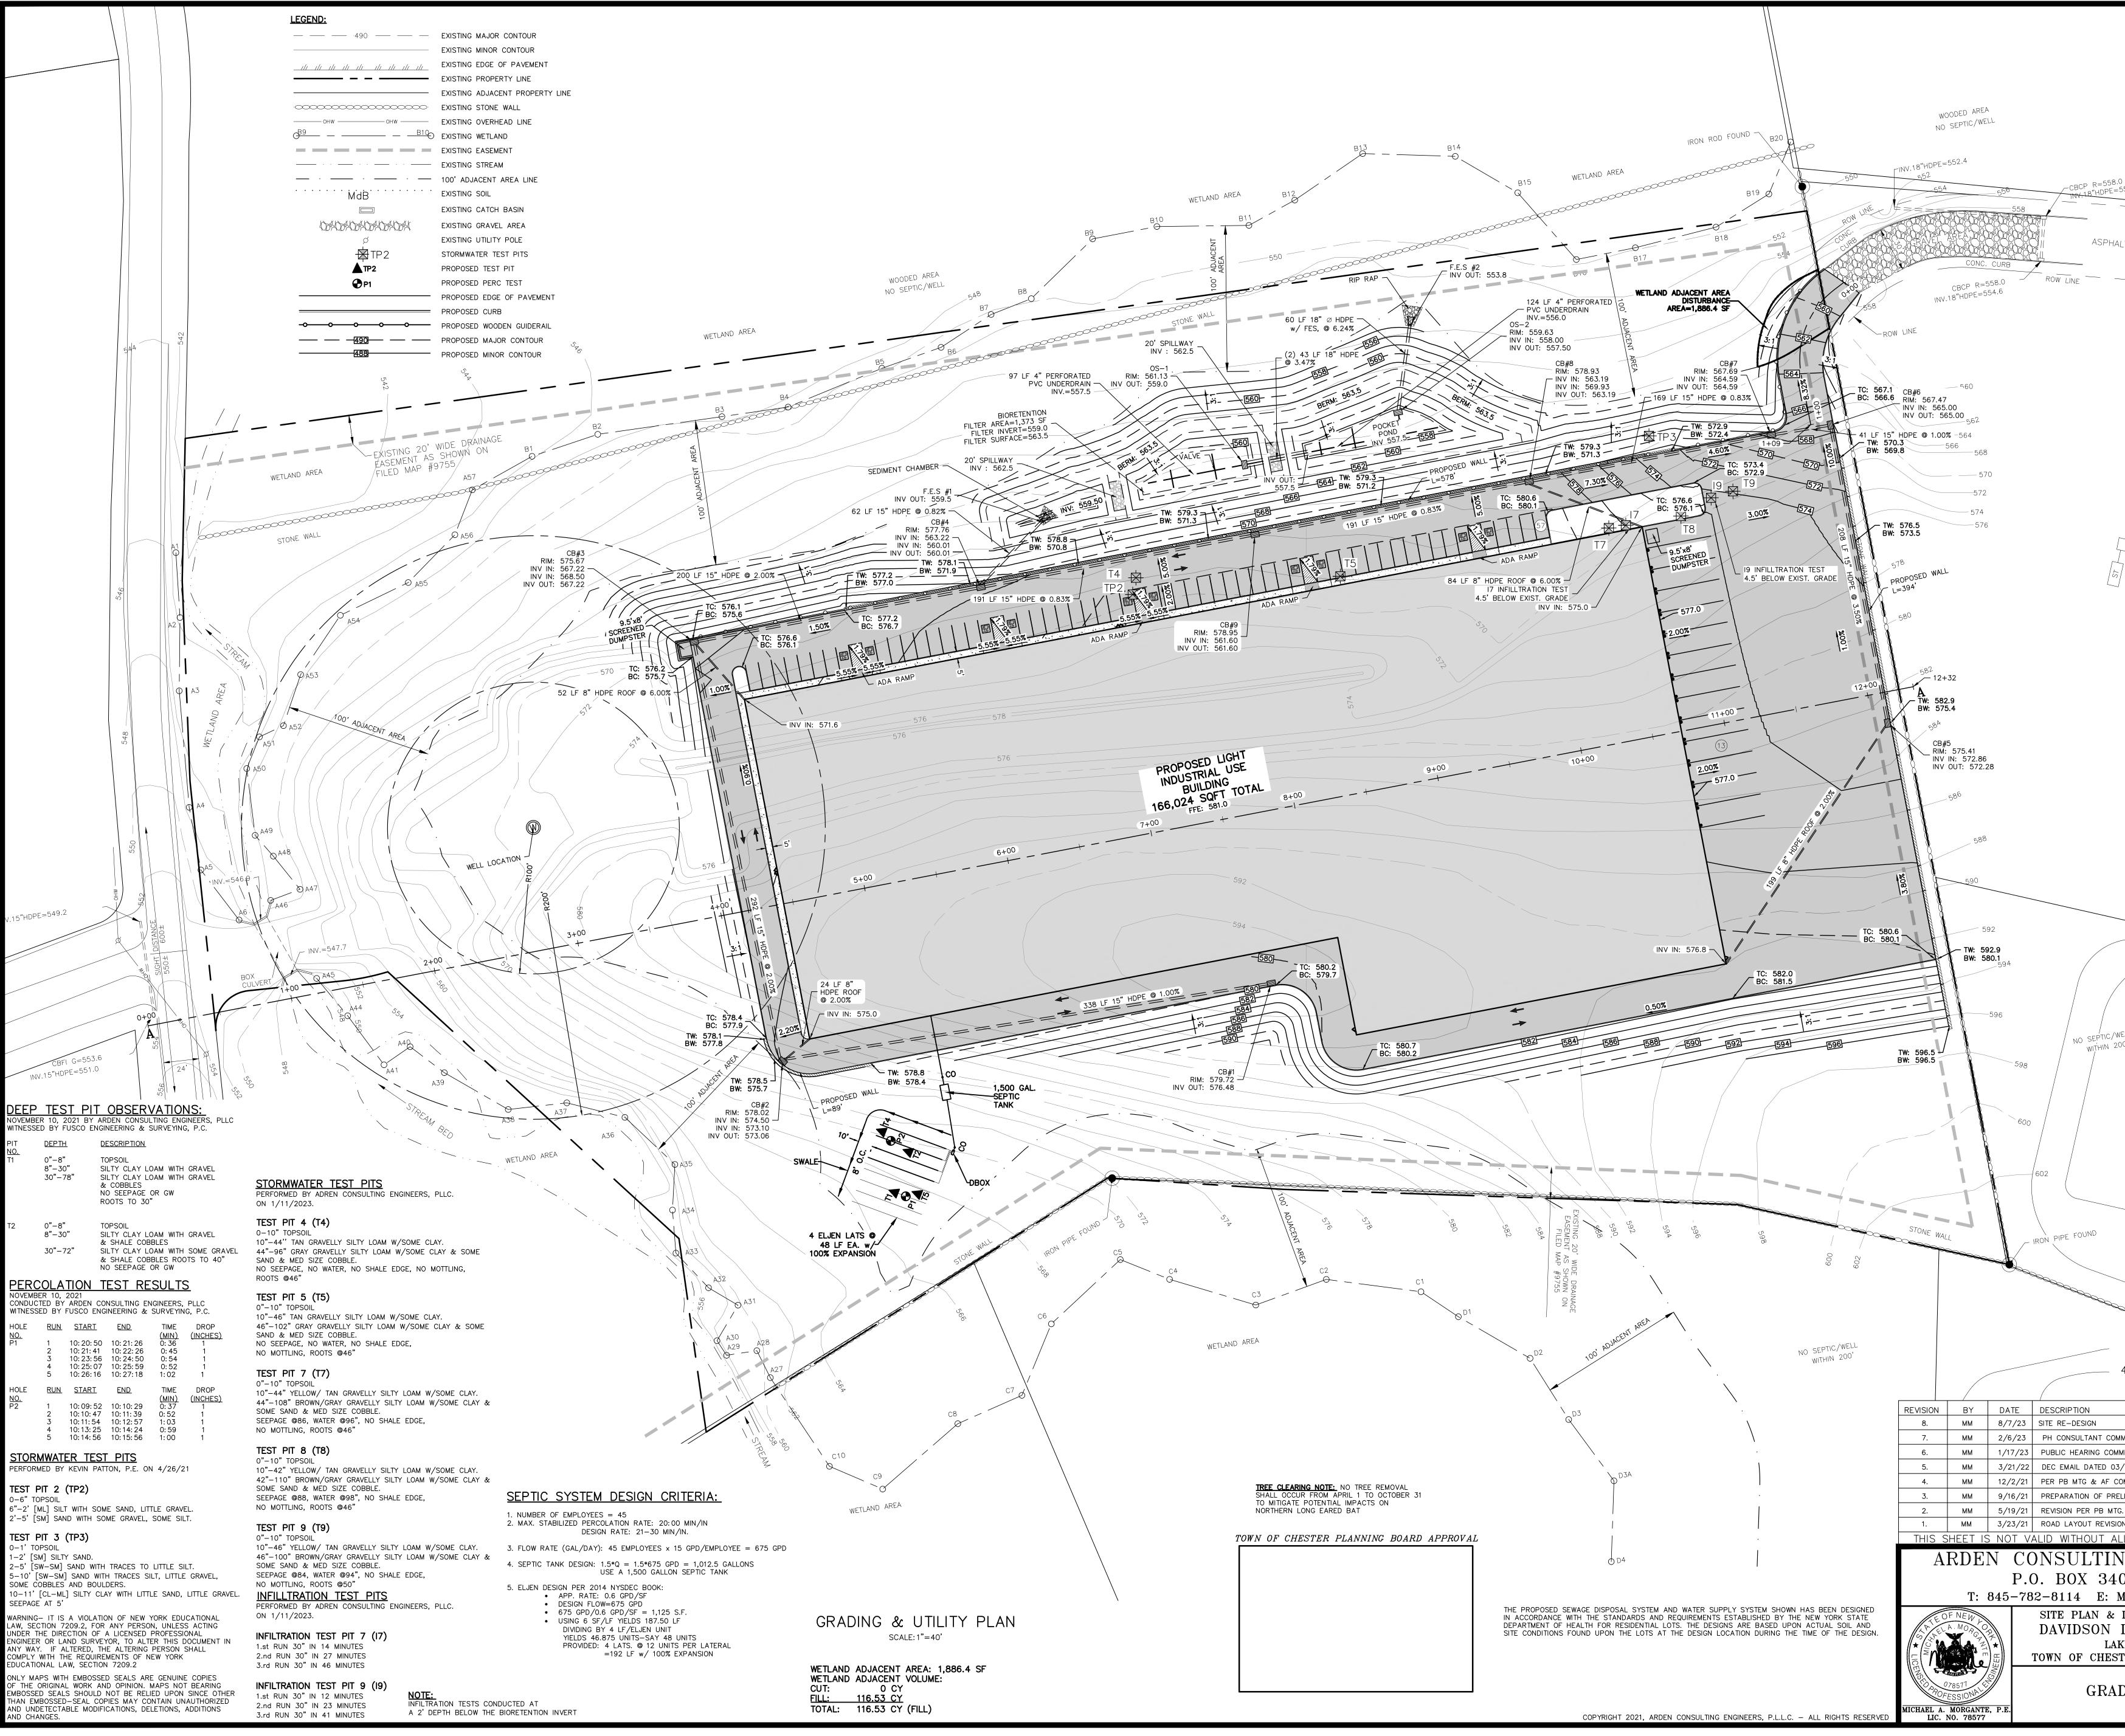


NAD B3	
0	
0 553.7	
NLT ROAD	
y ag	
APPROXIMATE SEPTIC SYSTEM LOCATION	
_	
NELL DO'	
oo' SCALE	0
oo' SCALE	
00' SCALE 40 0 20 40 8	
00' SCALE 40 0 20 40 8 SCALE FEET	
00' SCALE 40 0 20 40 8 SCALE FEET MENTS MENTS 3/11/22	
00° SCALE 40 0 20 40 8 SCALE FEET MENTS MENTS 5/11/22 OMMENT LETTER	
00' SCALE 40 0 20 40 8 SCALE FEET MENTS SCALE FEET MENTS S/11/22 OMMENT LETTER ELIMINARY PLANS G. & COMMENT LETTERS	
00' SCALE 40 0 20 40 8 SCALE FEET MENTS SCALE FEET MENTS 3/11/22 SOMMENT LETTER ELIMINARY PLANS G. & COMMENT LETTERS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE	SE THE SET
OO' SCALE 40 0 20 40 8 SCALE FEET AMENTS SCALE FEET AMENTS SCALE FEET AMENTS SCALE FEET SCALE FEET	SE THE SET
SCALE 40 0 20 40 8 SCALE 40 0 20 40 8 SCALE FEET MMENTS SCALE FEET SCALE FEET SCAL	SE THE SET
OO' SCALE 40 0 20 40 8 SCALE FEET AMENTS SCALE FEET AMENTS SCALE FEET AMENTS SCALE FEET SCALE FEET	DE THE SET LLC
SCALE SC	DE THE SET LLC JOB#: 20-030 SCALE:
OO' SCALE SCALE 40 0 20 40 8 SCALE FEET AMENTS SCALE FEET AMENTS SCALE FEET AMENTS SCALE FEET COMMENT LETTER SCALE FEET SCALE FEET S	SE THE SET LLC JOB#: 20-030 SCALE: AS_NOTED DATE:
OO' SCALE 40 0 20 40 8 SCALE 40 0 20 40 8 SCALE FEET MENTS SCALE FEET MENTS SJ11/22 OMMENT LETTER ELIMINARY PLANS G. & COMMENT LETTERS ON PER PB MTG. ELI OF THE SHEETS THAT COMPRIS NG ENGINEERS, P 0 MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC KE STATION ROAD	DE THE SET LLC JOB#: 20-030 SCALE:

ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED—SEAL COPIES MAY CONTAIN UNAUTHORIZED AND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS AND CHANGES.

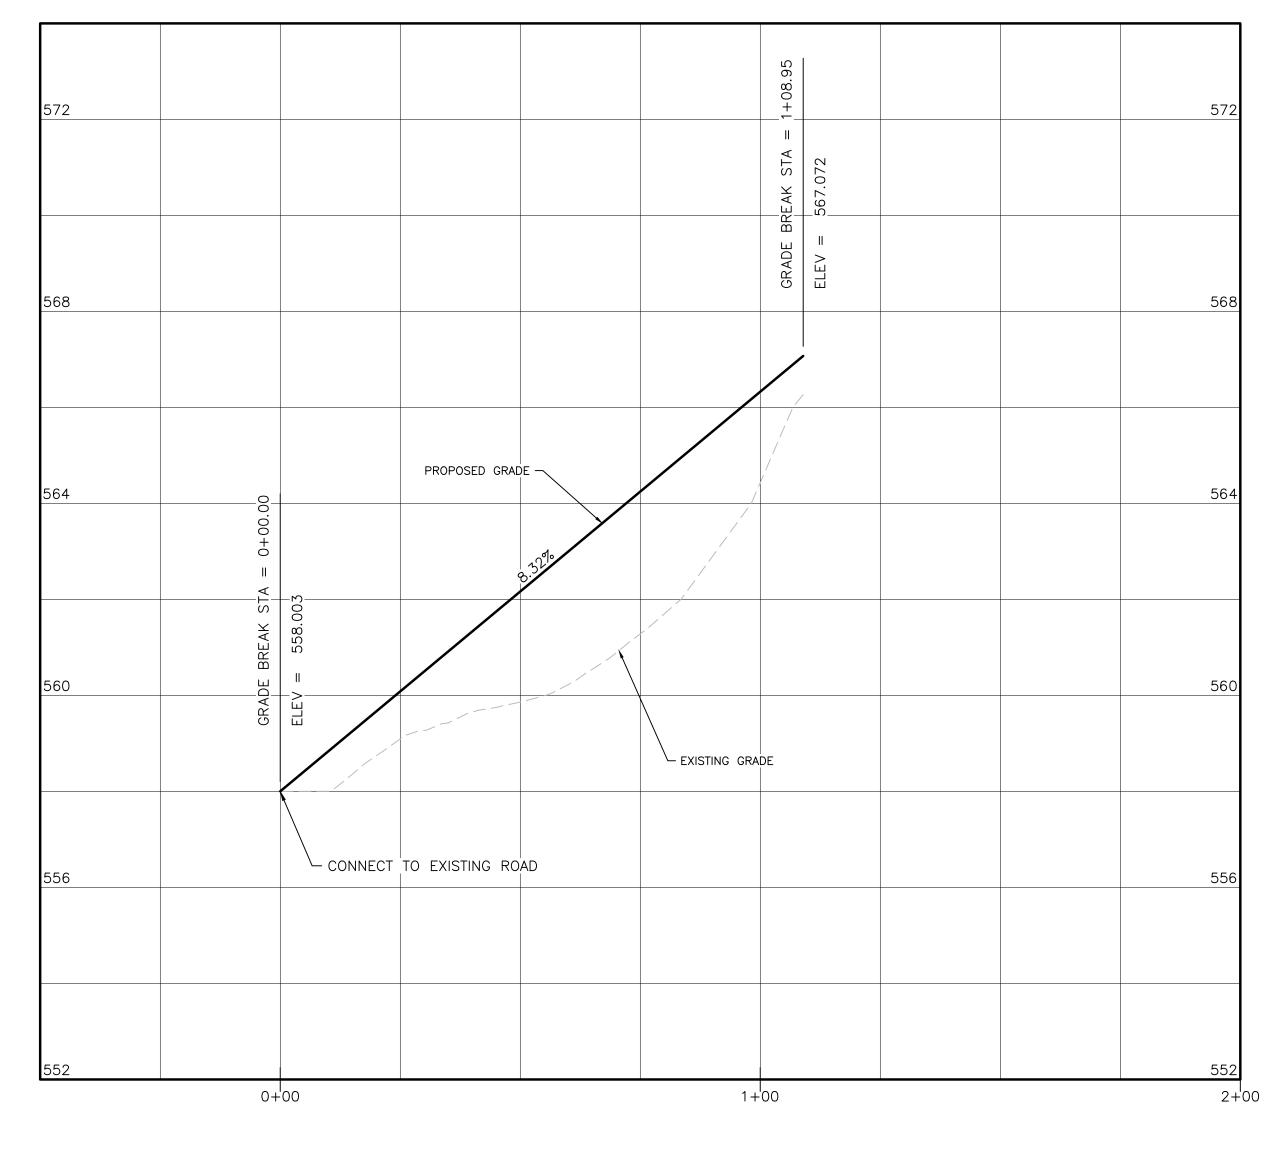


DRIVEWAY PROFILE HORIZONTAL SCALE: 1"=20' VERTICAL SCALE; 1"=2'

	8.	MM	8/7/23	SITE RE-DESIGN
	7.	ММ	2/6/23	PH CONSULTANT COMME
	6.	ММ	1/17/23	PUBLIC HEARING COMM
	5.	ММ	3/21/22	DEC EMAIL DATED 03/
	4.	ММ	12/2/21	PER PB MTG & AF COM
	3.	ММ	9/16/21	PREPARATION OF PRELI
	2.	ММ	5/19/21	REVISION PER PB MTG.
	1.	ММ	3/23/21	ROAD LAYOUT REVISION
TOWN OF CHESTER PLANNING BOARD APPROVAL	THIS S	SHEET IS	NOT V	ALID WITHOUT ALL
	A	RDE	N C	ONSULTIN
			Ρ.	0. BOX 340
		T: 8	845-78	B2-8114 E: M
	TEC	FNEWYO		SITE PLAN & I DAVIDSON I
	× LIC NICK4	A T T	TER *	LAK TOWN OF CHEST
	ELISTID PROF	278577 ESSIONAL		DRIVE
COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. – ALL RIGHTS RESERVED	MICHAEL A. LIC.	MORGANTE NO. 78577	, P.E.	

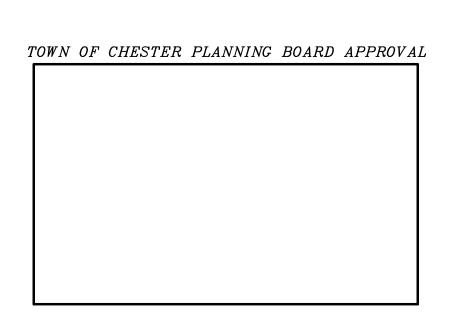

REVISION	BY	DATE	DESCRIPTION					
8.	ММ	8/7/23	SITE RE-DESIGN					
7.	ММ	2/6/23	PH CONSULTANT COMMENTS					
6.	ММ	1/17/23	PUBLIC HEARING COMMENTS					
5.	ММ	3/21/22	DEC EMAIL DATED 03/11/22					
4.	ММ	12/2/21	/21 PER PB MTG & AF COMMENT LETTER					
3.	ММ	9/16/21	PREPARATION OF PRELIMINARY PLANS					
2.	ММ	5/19/21	REVISION PER PB MTG. & COMMENT LETTERS					
1.	ММ	3/23/21	6/21 ROAD LAYOUT REVISION PER PB MTG.					
THIS S	HEET IS	S NOT V	ALID WITHOUT ALL OF THE SHEETS THAT COMPRIS	E THE SET				
A	RDE	N CC	ONSULTING ENGINEERS, PI	LLC				
		Р(D. BOX 340 MONROE, N.Y.					
	Т۰		2-8114 E: MAM@ARDENCONSULTING.NET					
	1.			JOB#:				
TEO	FNEW		SITE PLAN & LOT LINE COMBINATION FOR	20-030				
S X LL	A MORGY	P.	DAVIDSON DRIVE HOLDINGS, LLC	SCALE:				
			LAKE STATION ROAD	AS NOTED DATE:				
			TOWN OF CHESTER, COUNTY OF ORANGE, NY	03-21-22 DRAWN:				
	79571 V			мм				
PROF	ESSIONAL		DRIVEWAY PROFILES					
MICHAEL A.		E, P.E.		MM SHEET NO. 06 OF 22				

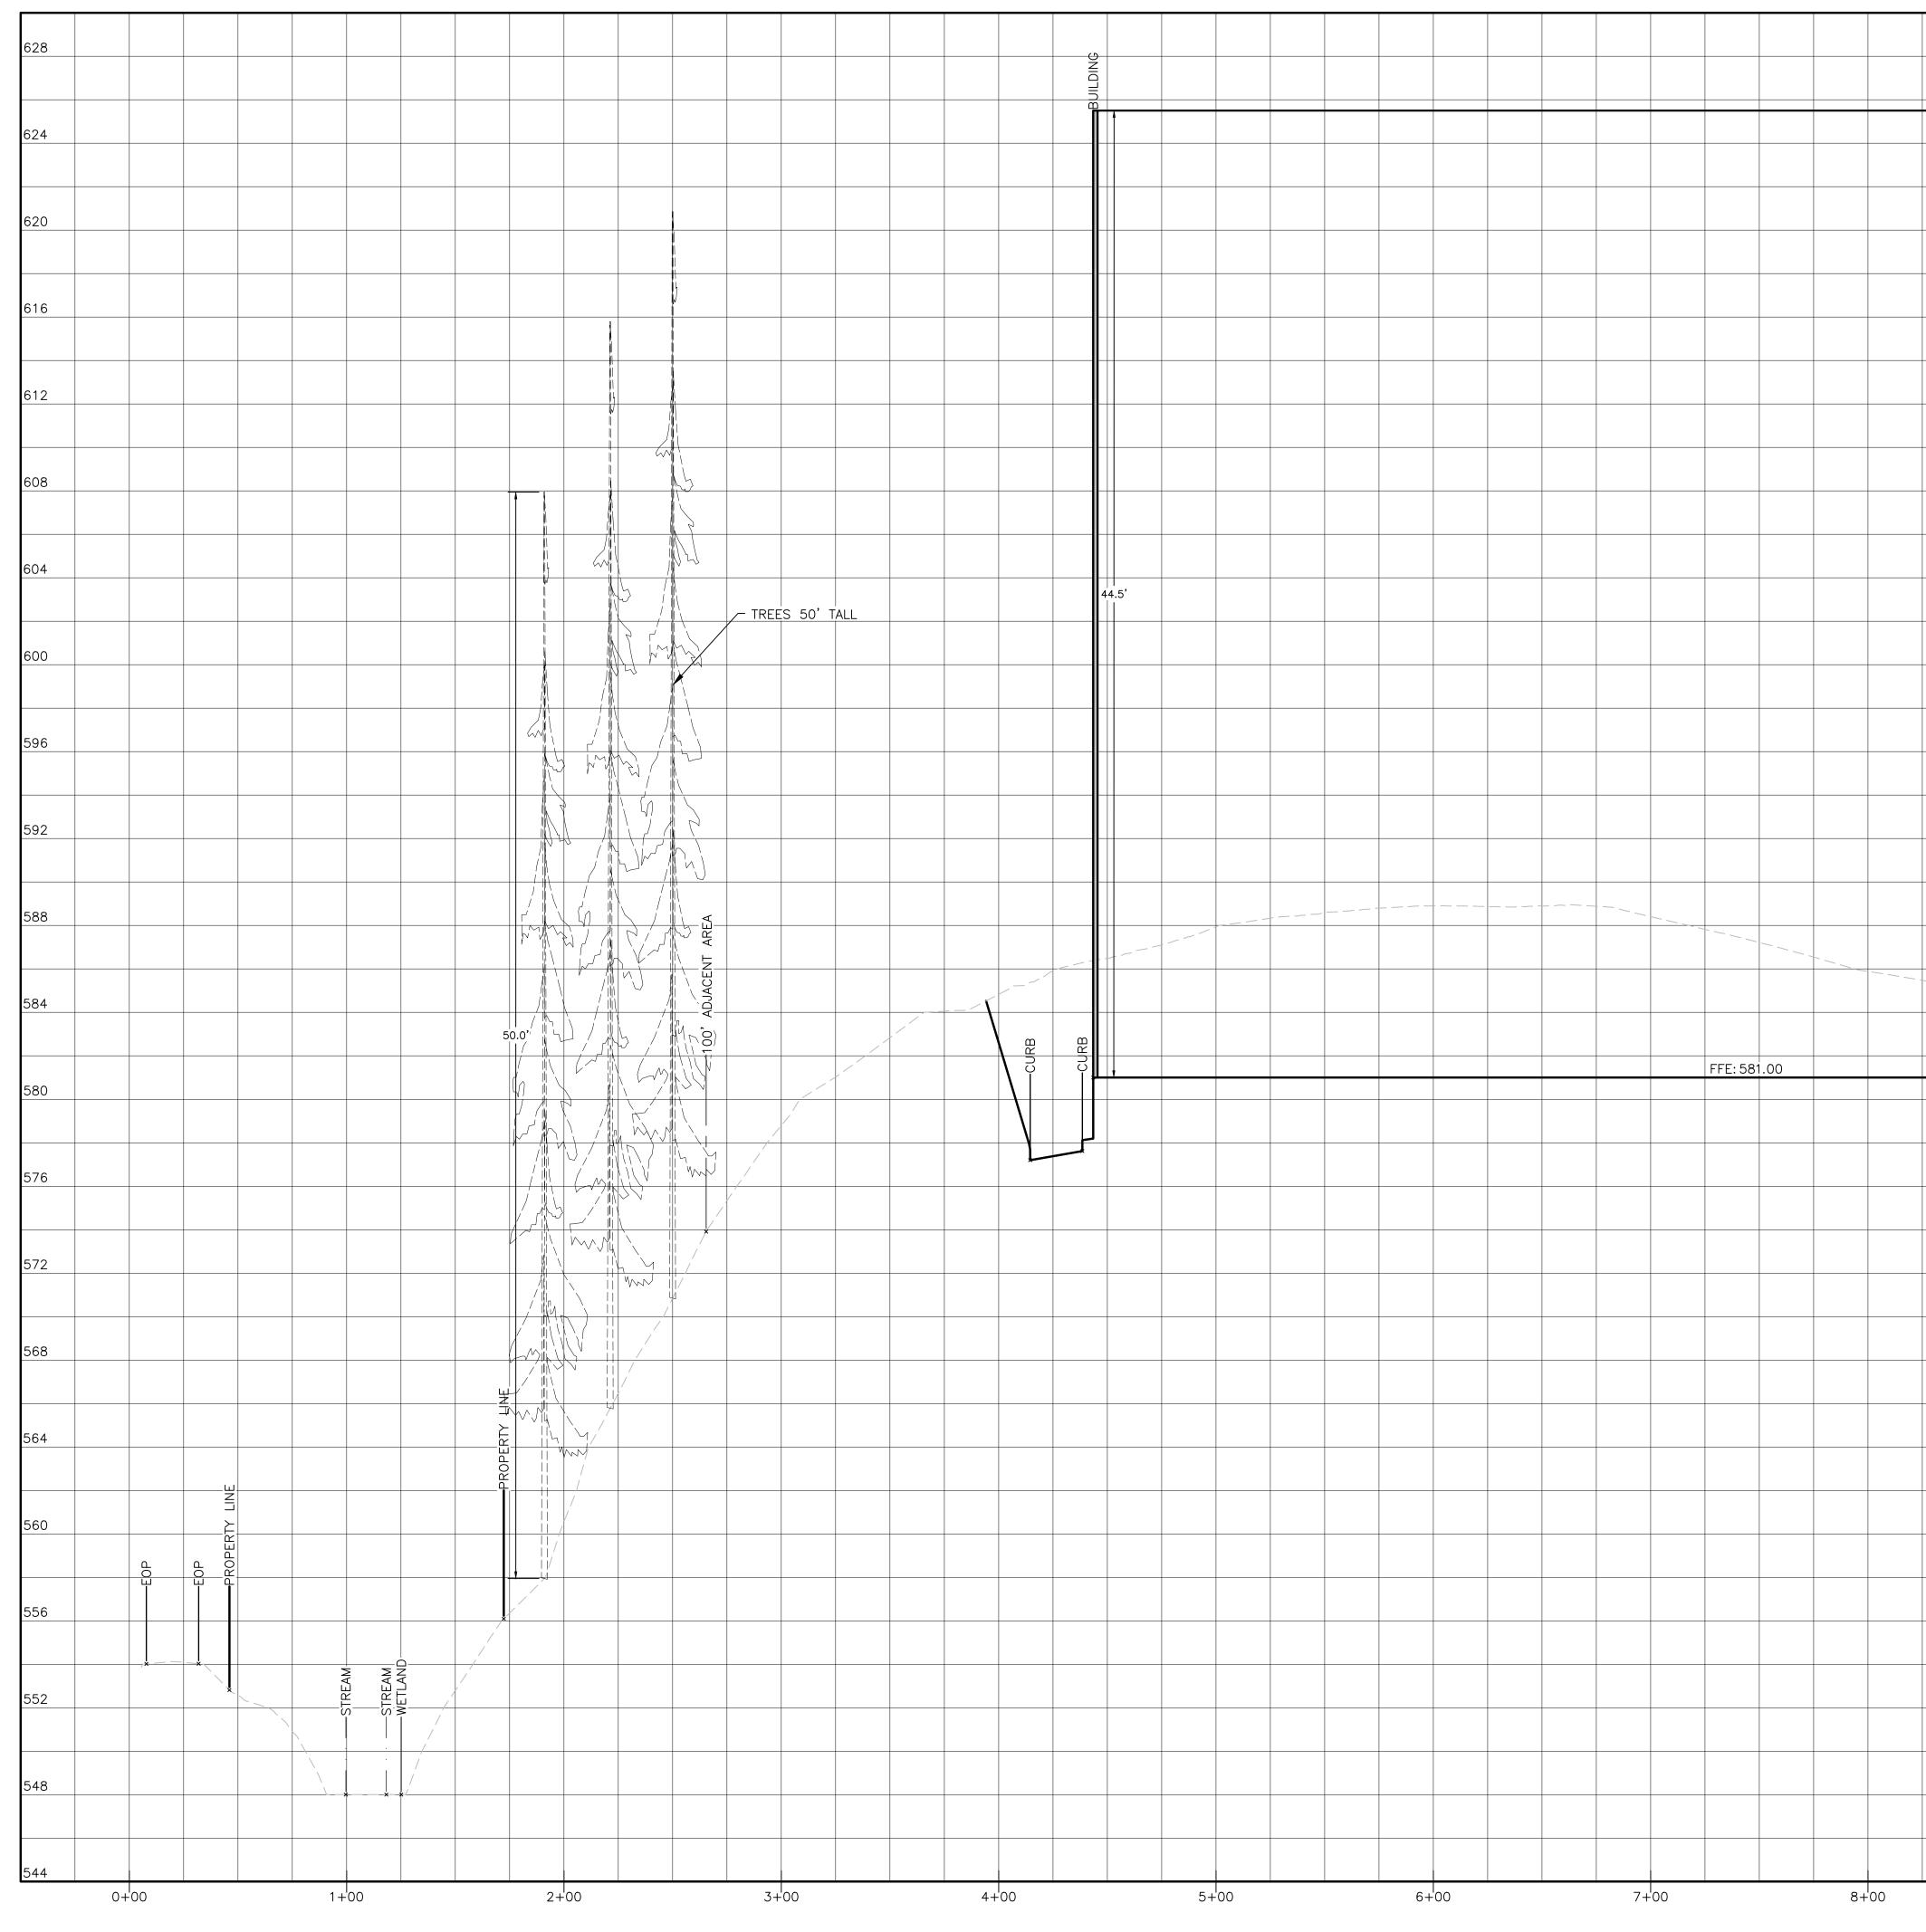

ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED—SEAL COPIES MAY CONTAIN UNAUTHORIZED AND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS AND CHANGES.

SECTION A-A HORIZONTAL SCALE: 1"=40' VERTICAL SCALE; 1"=4'


										628
										624
										 620
										 616
										612
										 608
										604
					44.5'					002
										 600
										596
										592
										 588
						DOCK	PRC	POSED WA		
						LOADING D	FRU			 58
			~	·	 	 			 	580
					4.0'					
					_ <u>*</u> L					 576
										572
										568
										564
										560
										 556
										552
										EAC
										548
										544


REVISION	ΒY	DA	TE	DESCRIPTION
8.	ММ	8/7	/23	SITE RE-DESIGN
7.	ММ	2/6	/23	PH CONSULTANT COMM
6.	ММ	1/17	7/23	PUBLIC HEARING COMM
5.	ММ	3/2	1/22	DEC EMAIL DATED 03/
4.	ММ	12/:	2/21	PER PB MTG & AF CO
3.	ММ	9/1	6/21	PREPARATION OF PREL
2.	ММ	5/19	9/21	REVISION PER PB MTG.
1.	ММ	3/2	3/21	ROAD LAYOUT REVISION
THIS S	HEET IS	S NO	TV.	ALID WITHOUT AL
A.			Р. ()NSULTIN). BOX 340 2-8114 E: M
10 10 10 10 10 10 10 10 10 10	A COLOR	ER + YO		SITE PLAN & DAVIDSON DAVIDSON LAK
MICHAEL A. LIC. N	78577 ESSIONA MORGANTE NO. 78577	W6 E, P.E.		SE

TOWN OF CHESTER PLANNING BOARD APPROVAL

COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. – ALL RIGHTS RESERVED


IENTS	
MENTS	
/11/22	
OMMENT LETTER	
LIMINARY PLANS	
G. & COMMENT LETTERS	
ON PER PB MTG.	
L OF THE SHEETS THAT COMPRISE	THE SET
NG ENGINEERS, PL	
L OF THE SHEETS THAT COMPRISE NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET	
NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR	JOB#:
NG ENGINEERS, PL 0 MONROE, N.Y. mam@ardenconsulting.net	JOB#: 20-030 SCALE:
NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR	JOB#: 20-030 SCALE: AS NOTED
NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC	JOB#: 20-030 SCALE: AS_NOTED DATE: 03-21-22
NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC KE STATION ROAD	JOB#: 20-030 SCALE: AS_NOTED DATE: 03-21-22 DRAWN:
NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC KE STATION ROAD TER, COUNTY OF ORANGE, NY	JOB#: 20-030 SCALE: AS_NOTED DATE: 03-21-22
NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC KE STATION ROAD	JOB#: 20-030 SCALE: AS_NOTED DATE: 03-21-22 DRAWN:

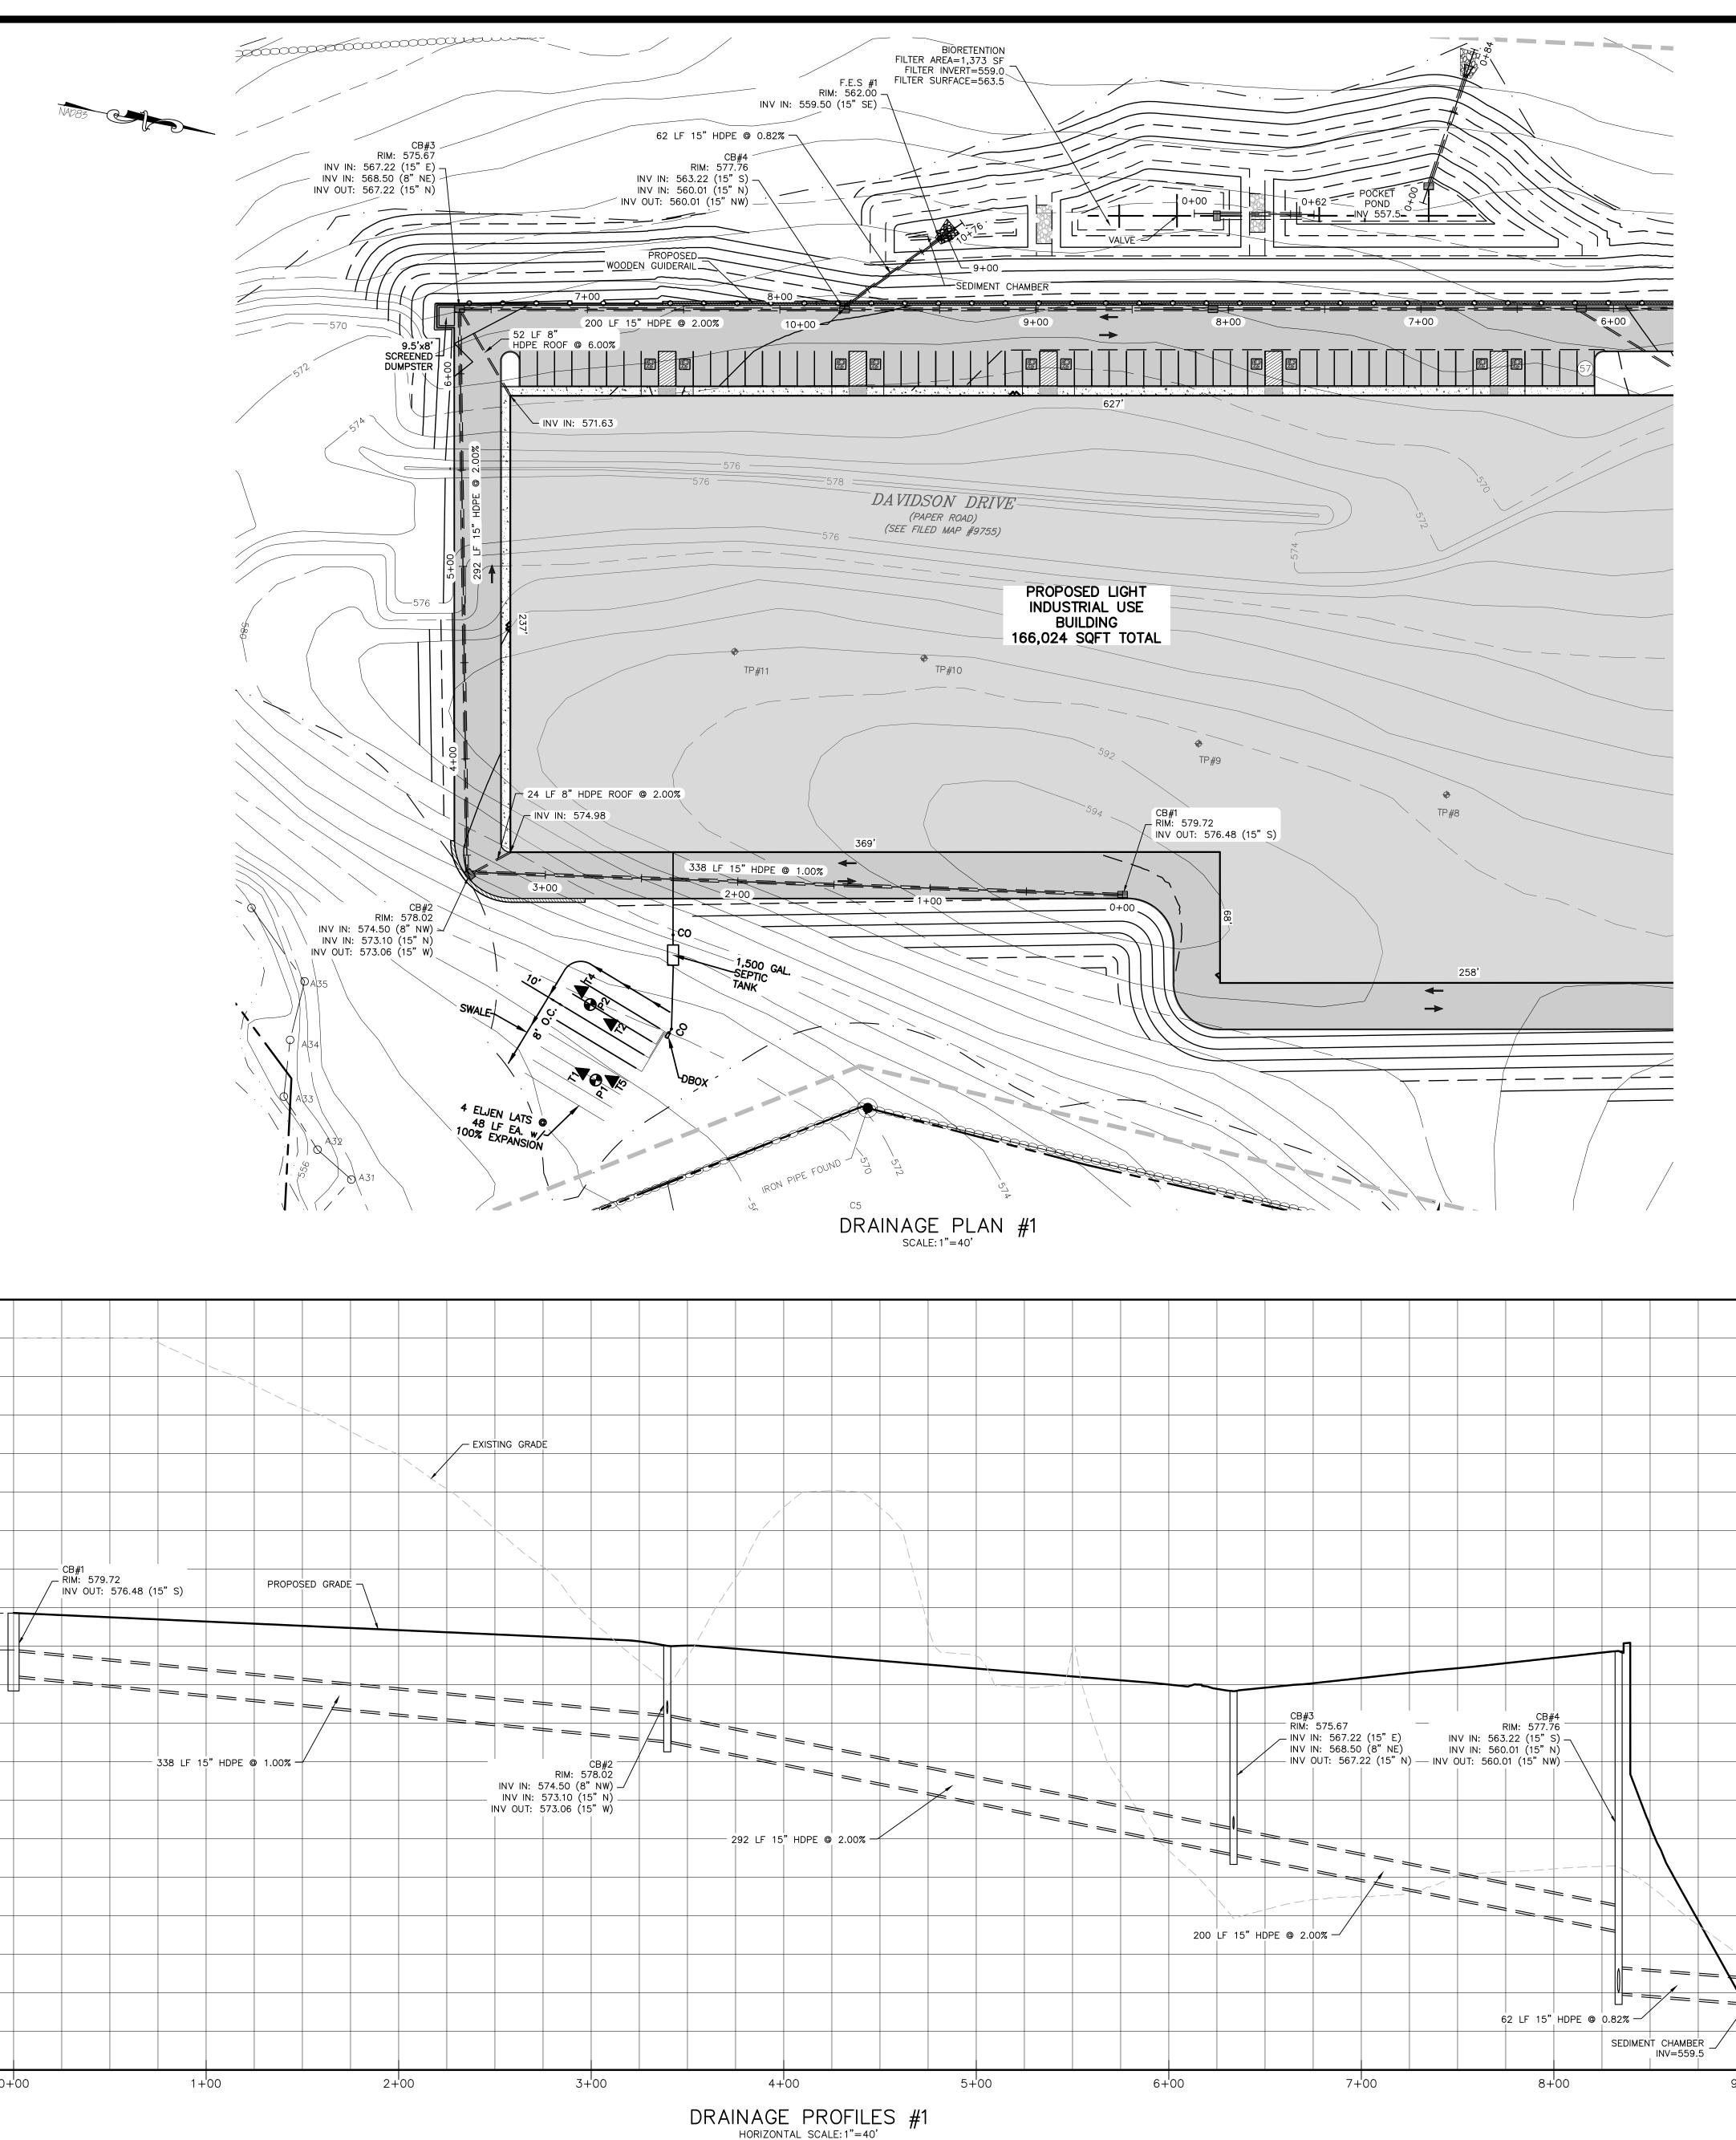

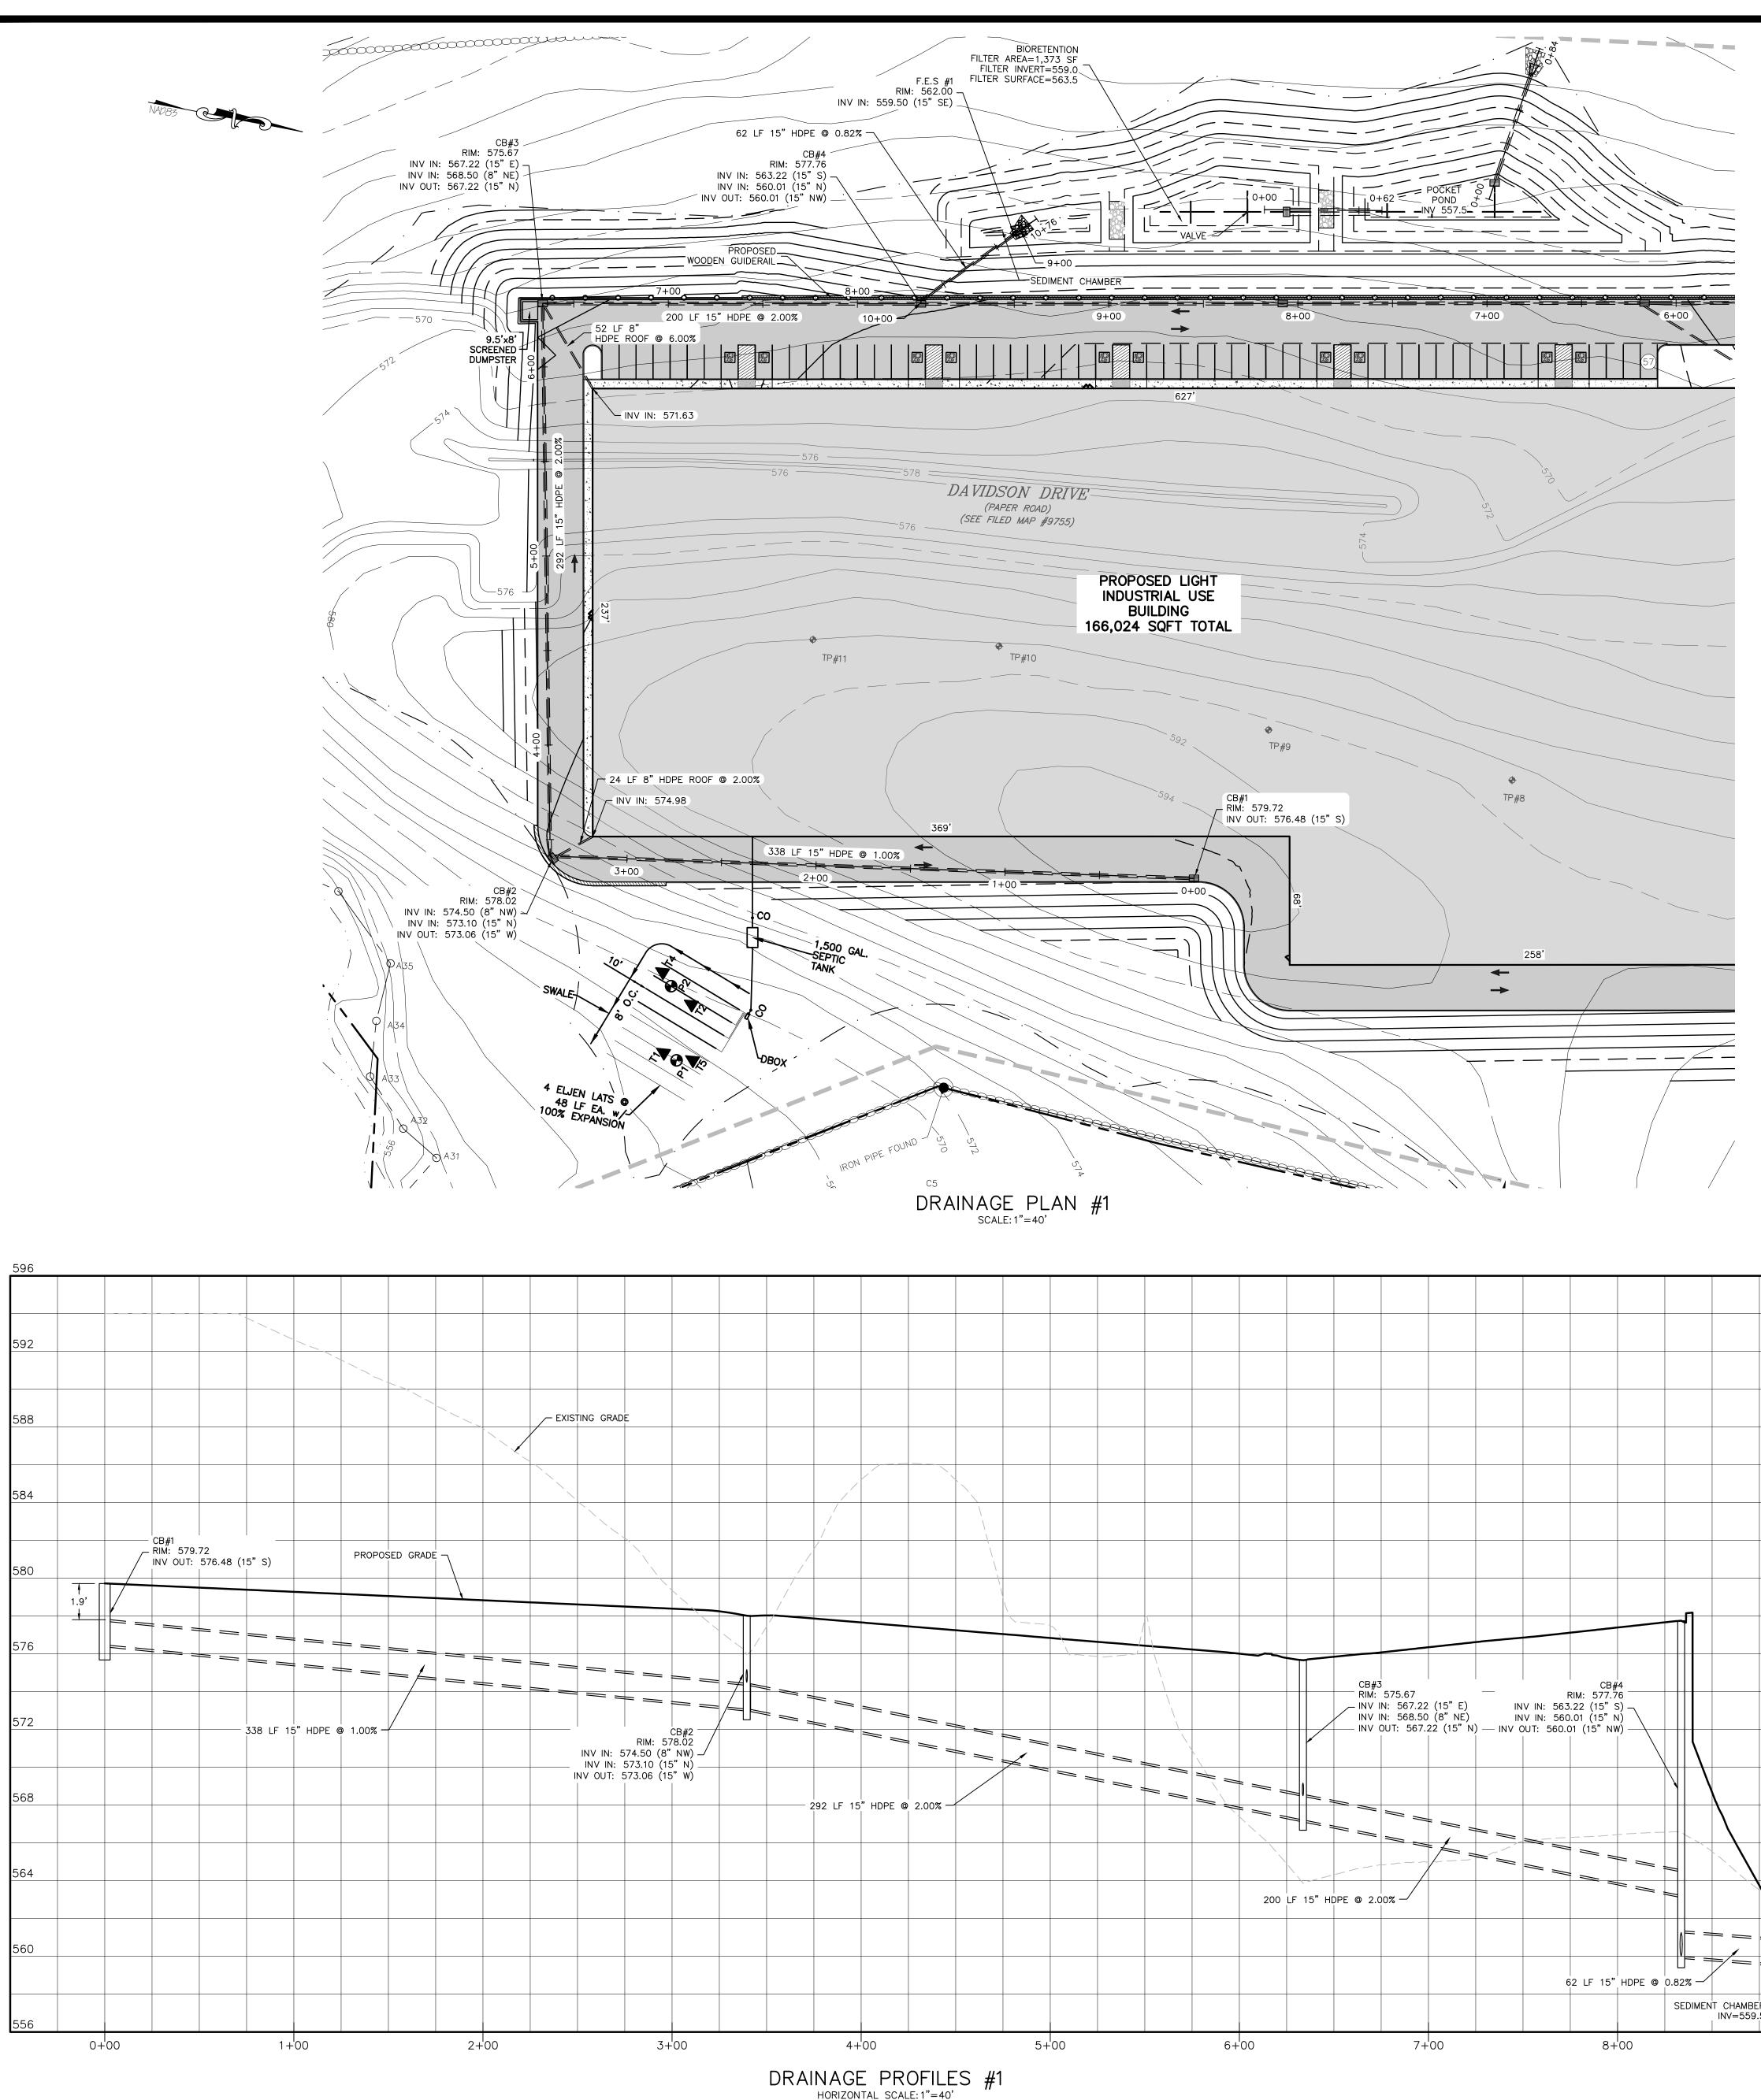


ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED-SEAL COPIES MAY CONTAIN UNAUTHORIZED AND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS AND CHANGES.


VERTICAL SCALE: 1"=4'

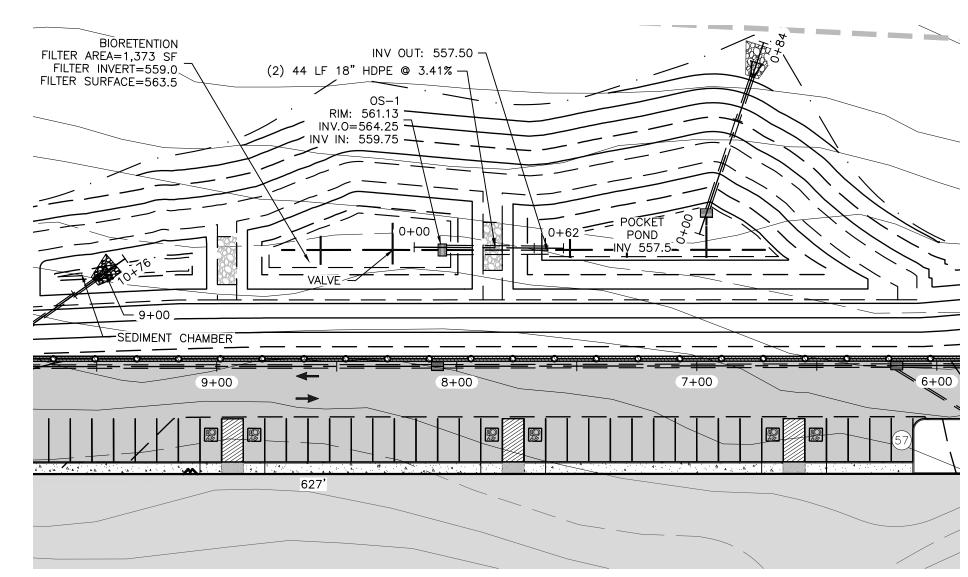


DRAINAGE PLAN #2 SCALE: 1"=40'

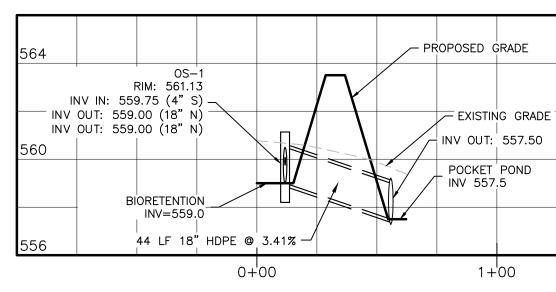



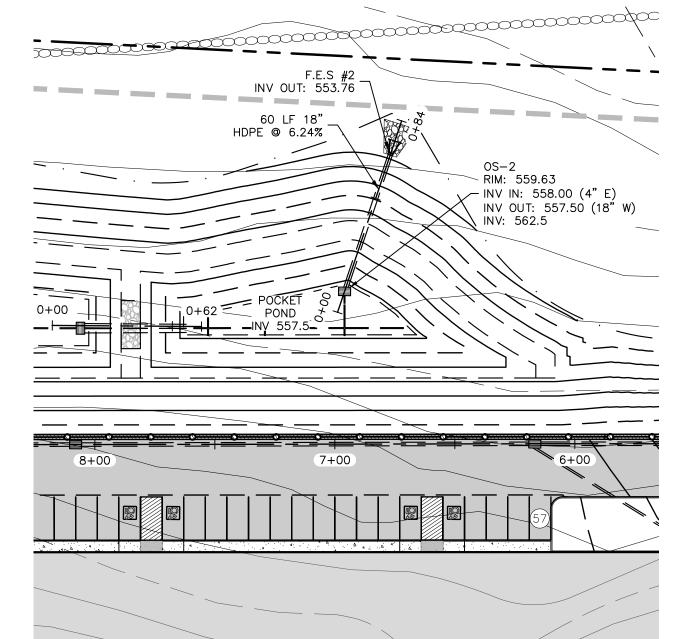


DRAINAGE PLAN #3 SCALE: 1"=40'

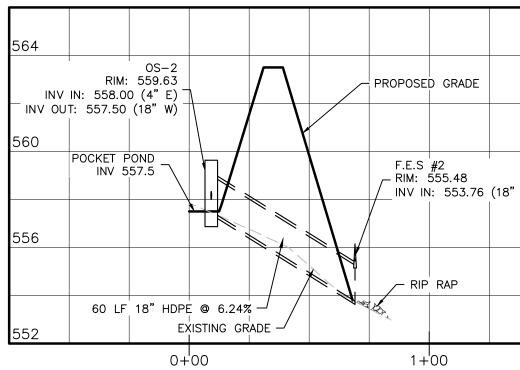

DF	HORI	GE PF zontal sc rtical sca	ROFILES #3 CALE: 1"=40' KLE: 1"=4'
REVISION	BY	DATE	DESCRIPTION
7.	ММ	8/7/23	SITE RE-DESIGN
6.	ММ	2/6/23	PH CONSULTANT COMMENTS
5.	ММ	1/17/23	PUBLIC HEARING COMMENTS
4.	ММ	3/21/22	DEC EMAIL DATED 03/11/22
3.	ММ	9/16/21	PREPARATION OF PRELIMINARY PLANS
2.	мм	5/19/21	REVISION PER PB MTG. & COMMENT LETTERS
1.	ММ	3/23/21	
THIS S	SHEET IS	S NOT V	ALID WITHOUT ALL OF THE SHEETS THAT COMPRISE THE SET
A	RDE		ONSULTING ENGINEERS, PLLC
	Т:		O. BOX 340 MONROE, N.Y. 32–8114 E: MAM@ARDENCONSULTING.NET
× LIC	A. MORGANTE	AX * HEI	SITE PLAN & LOT LINE COMBINATION FOR DAVIDSON DRIVE HOLDINGS, LLC LAKE STATION ROAD TOWN OF CHESTER, COUNTY OF ORANGE, NY
MICHAEL A.	MORGANTE NO. 78577	:, P.E.	DRAINAGE PROFILES 1 MM CHECKED: MM SHEET NO. 08 OF 22




NAD 83

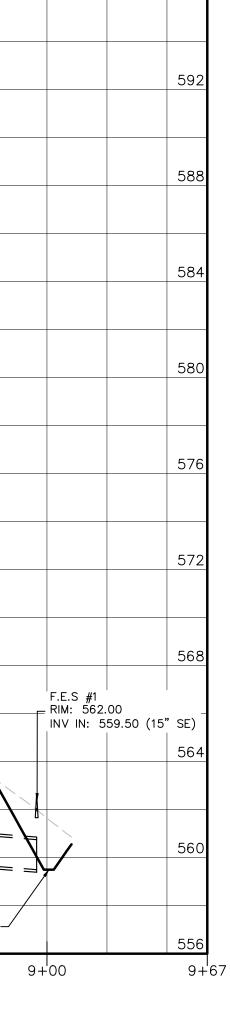



COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. - ALL RIGHTS RESERVED

	564
	560
'E)	
	556
	552
	1+7

(4"E) 0 (18"	W)

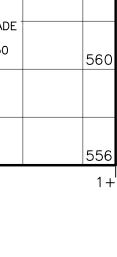

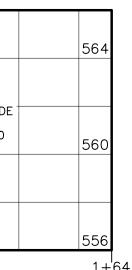

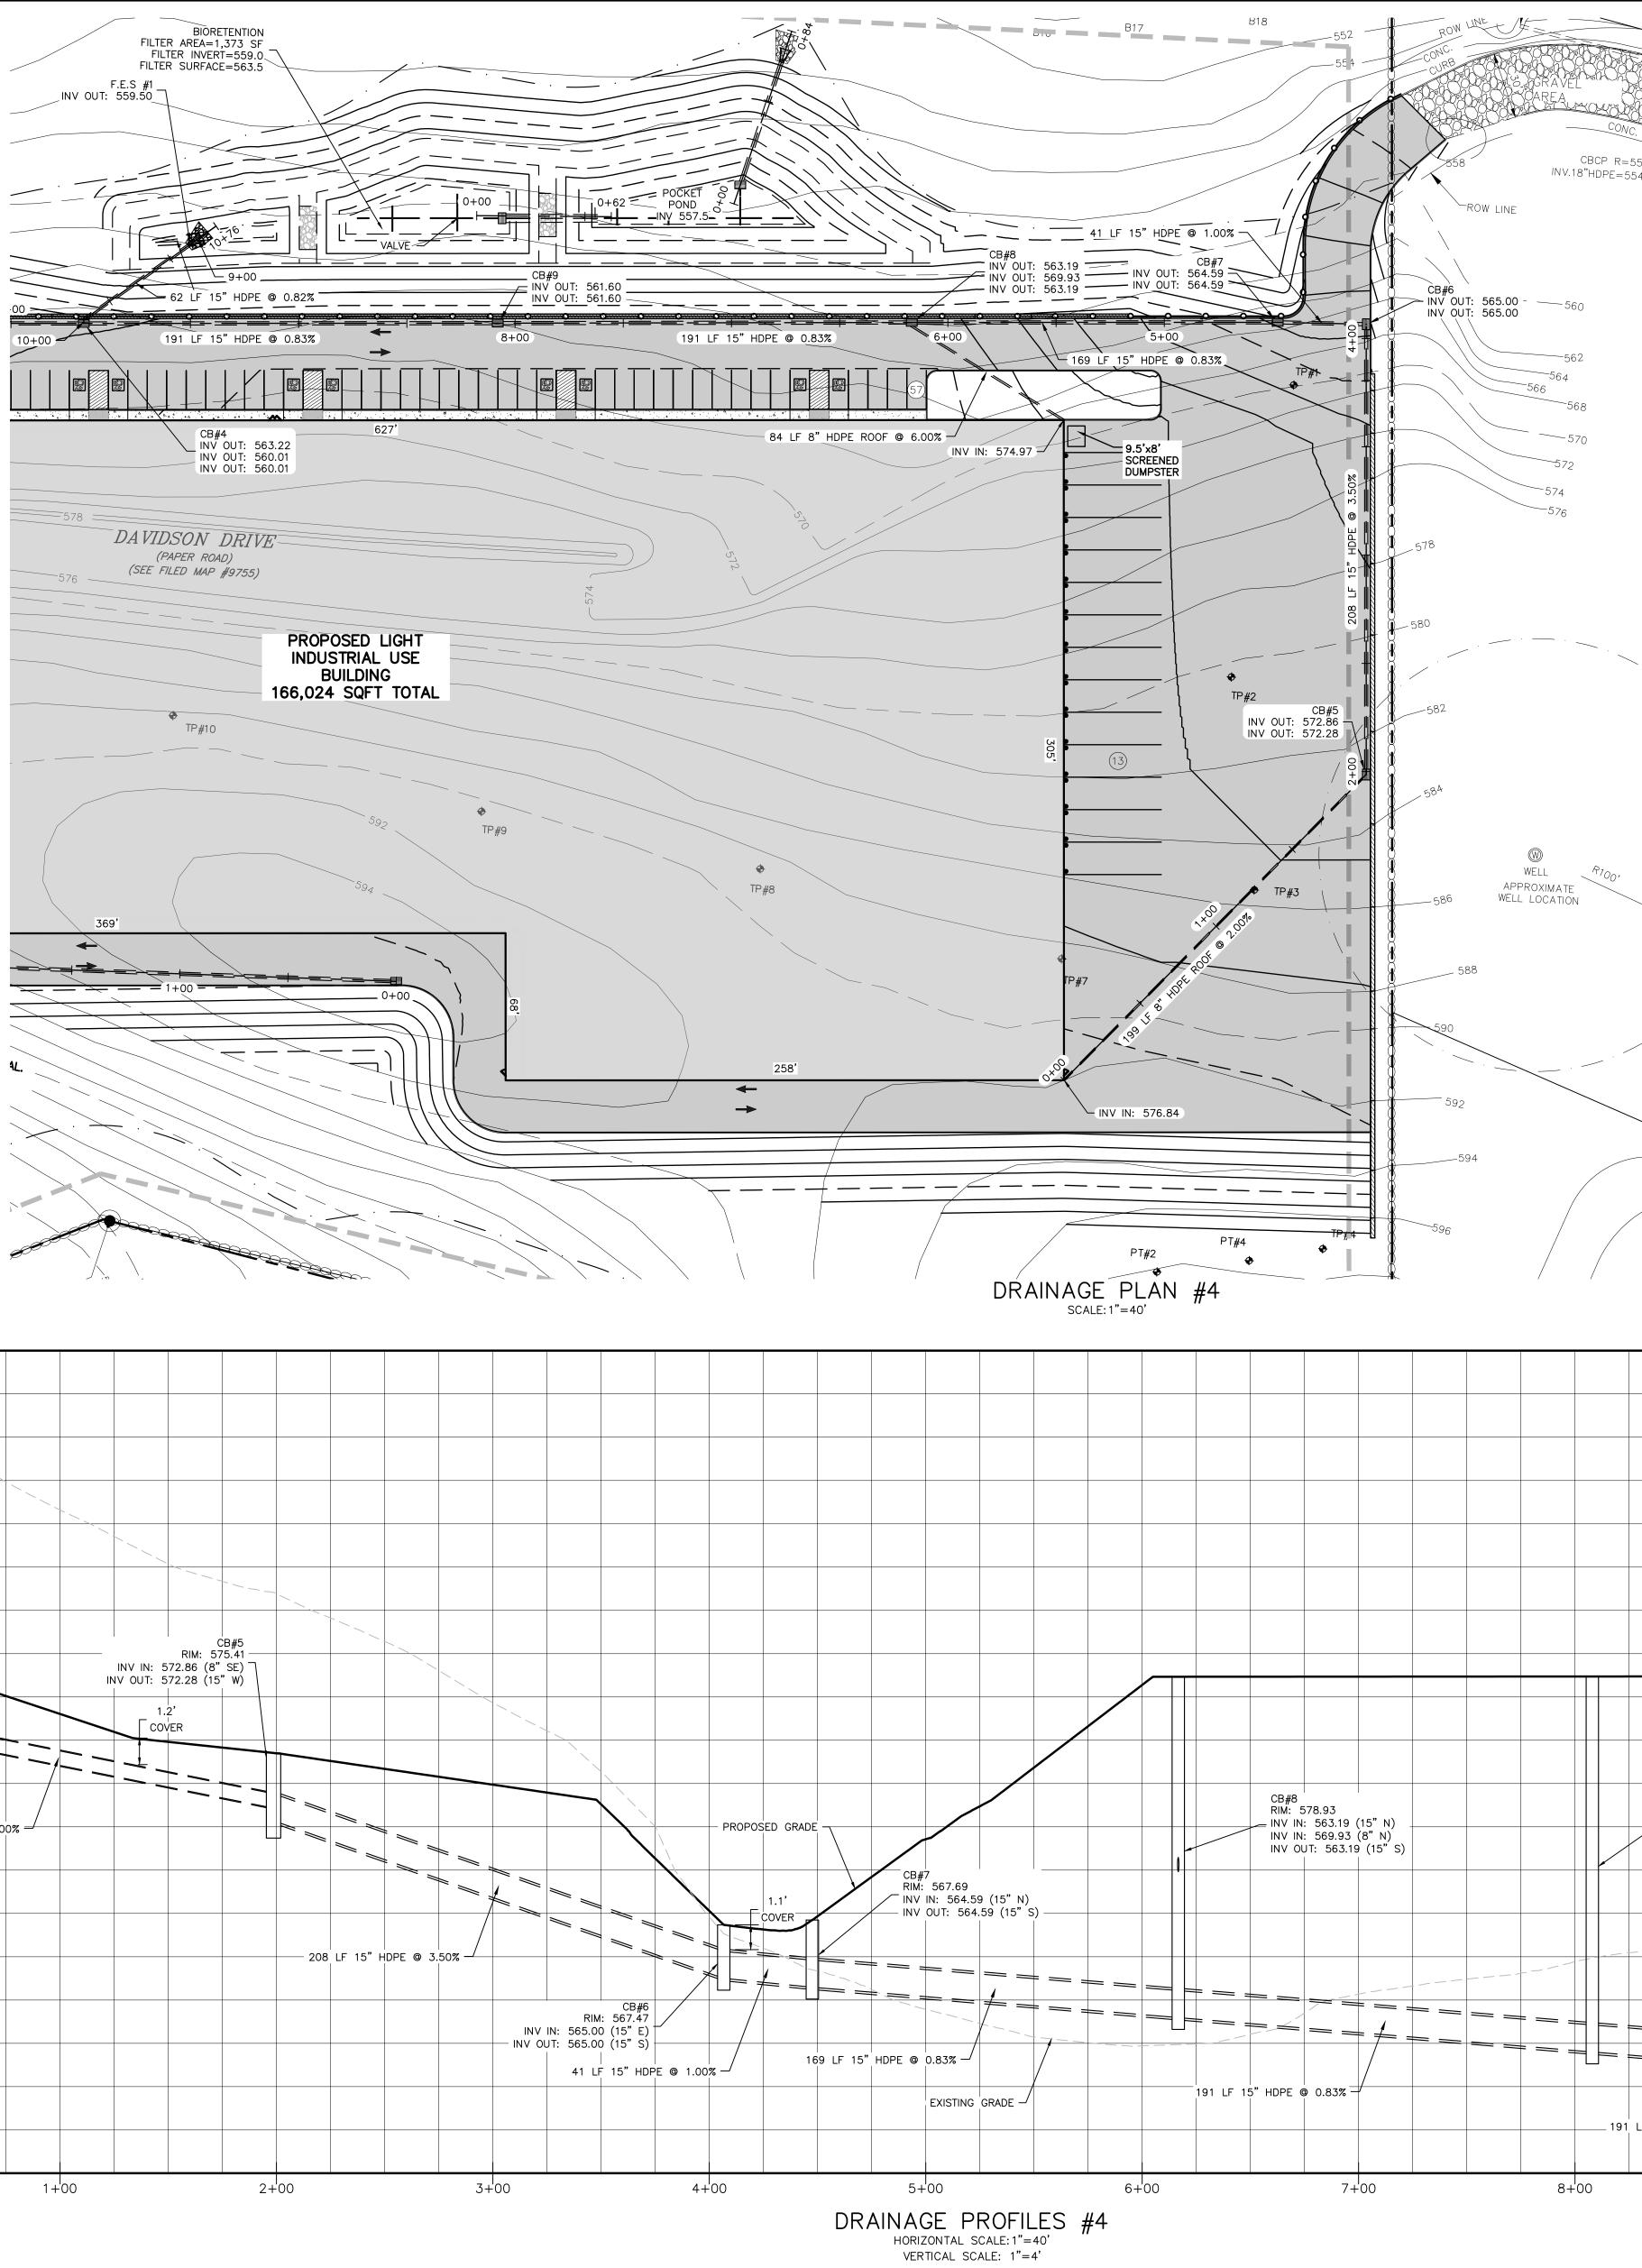


592													
588													
584							~						
580								CB#5					
INV IN: 576.84	7					' INV IN: 5 NV OUT: 5	RIM: 5 72.86 (8' 72.28 (15	75.41 — 'SE)					
576	E I						2' /ER						
				==/									
572													
	199	LF 8" H[DPE @ 2.0	00% -/								//	
568													
564									208	LF 15" H	DPE @ 3.	.50% _/	
													IN
560													INV
500													
EEC													
556	0+00			1+	-00			2	+00			3+	-00


ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED—SEAL COPIES MAY CONTAIN UNAUTHORIZED AND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS AND CHANGES.

	DAVIDSON DRIVE						
58.0 64.6 ROW LINE							
ST							
APPRC	DXIMATE SEPTIC SYSTEM LOCATION						
			592				
			588				
			584				
			580				
			576				
CB#9 RIM: 578.95		CB#4 RIM: 577.76					
RIM: 578.95 INV IN: 561.60 (15" N INV OUT: 561.60 (15"	N)	CB#4 RIM: 577.76 INV IN: 563.22 (15" S) INV IN: 560.01 (15" N) INV OUT: 560.01 (15" NW)	572				
			568				
		F.E.S #1 RIM: 562.00 INV IN: 559.50 (15" SE) 564				
			560		ATE DESCRIPTION		
LF 15" HDPE @ 0.83% —/	62 LF 15" HDPE @	SEDIMENT CHAMBER / INV=559.5	556	6. MM 2/ 5. MM 1/	/7/23SITE RE-DESIGN/6/23PH CONSULTANT COMMENTS/17/23PUBLIC HEARING COMMENTS		
9	+ ^I 00 10	o∔oo 11∔oo	11+50	3. MM 9/	/21/22 DEC EMAIL DATED 03/11/22 /16/21 PREPARATION OF PRELIMINARY /19/21 REVISION PER PB MTG. & COM		
	TOWN OF CHES	TER PLANNING BOARD APPROVAL		1. MM 3/ THIS SHEET IS NO	23/21 ROAD LAYOUT REVISION PER F OT VALID WITHOUT ALL OF	PB MTG. THE SHEETS THAT COMPRI	
					P.O. BOX 340 M		
				T: 845	SITE PLAN & LOT I	ARDENCONSULTING.NET LINE COMBINATION FOR YE HOLDINGS, LLC	JOB#: <u>20-030</u> SCALE:
				TICETS	LAKE ST	ATION ROAD COUNTY OF ORANGE, NY	AS NOTED DATE: 03-21-22 DRAWN:
				MICHAEL A. MORGANTE, P.I LIC. NO. 78577		PROFILES 2	MM CHECKED: MM SHEET NO. 09 OF 22
	COPYRIGHT 2021, /	ARDEN CONSULTING ENGINEERS, P.L.L.C. – ALL	- RIGHIS RESERVED	LIU. NU. 78577			UY OF 22

CBCP R=558.0

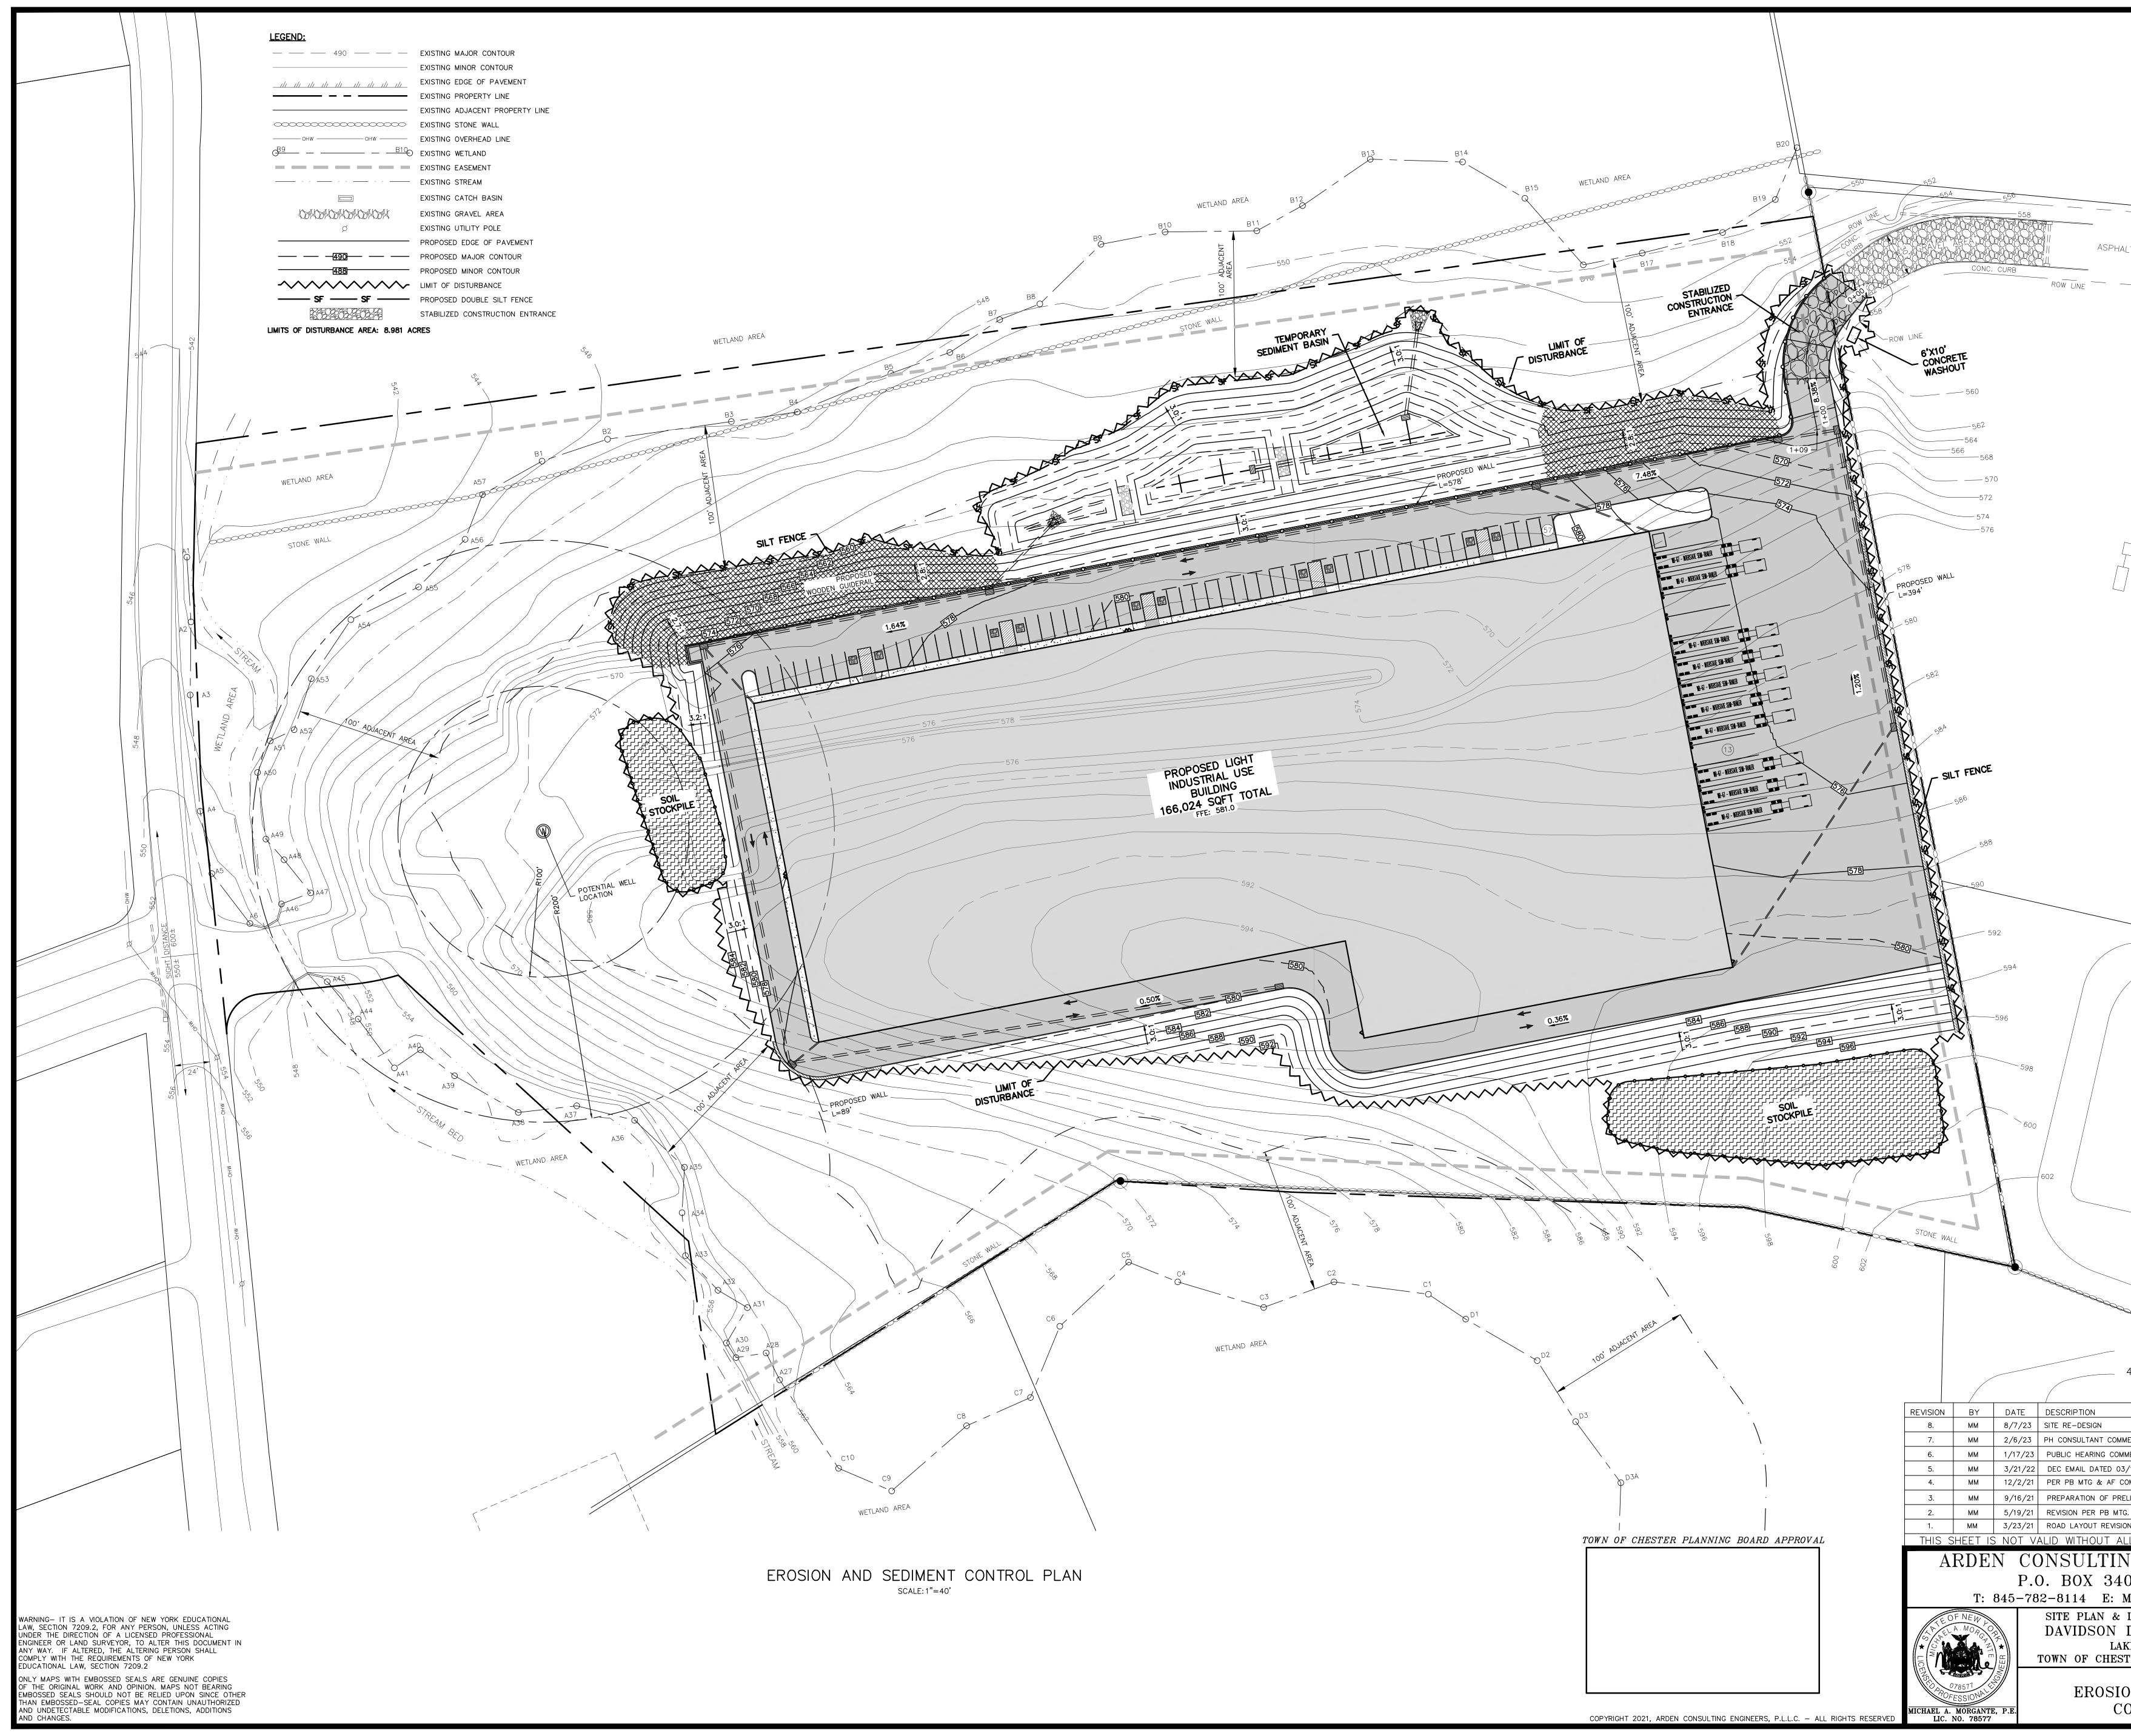


NAD83 CAL	
LT ROAD	
SCALE 40 0 20 40 80	
SCALE FEET	
MENTS MENTS	
5/11/22 OMMENT LETTER ELIMINARY PLANS	
G. & COMMENT LETTERS DN PER PB MTG.	
LL OF THE SHEETS THAT COMPRISE	
O MONROE, N.Y. MAM@ARDENCONSULTING.NET	JOB#·
DRIVE HOLDINGS, LLC	JOB#: <u>20-030</u> SCALE: <u>AS NOTED</u> DATE:
TER, COUNTY OF ORANGE, NY	<u>03-21-22</u> DRAWN:
	MM CHECKED: MM SHEET NO. 10 OF 22

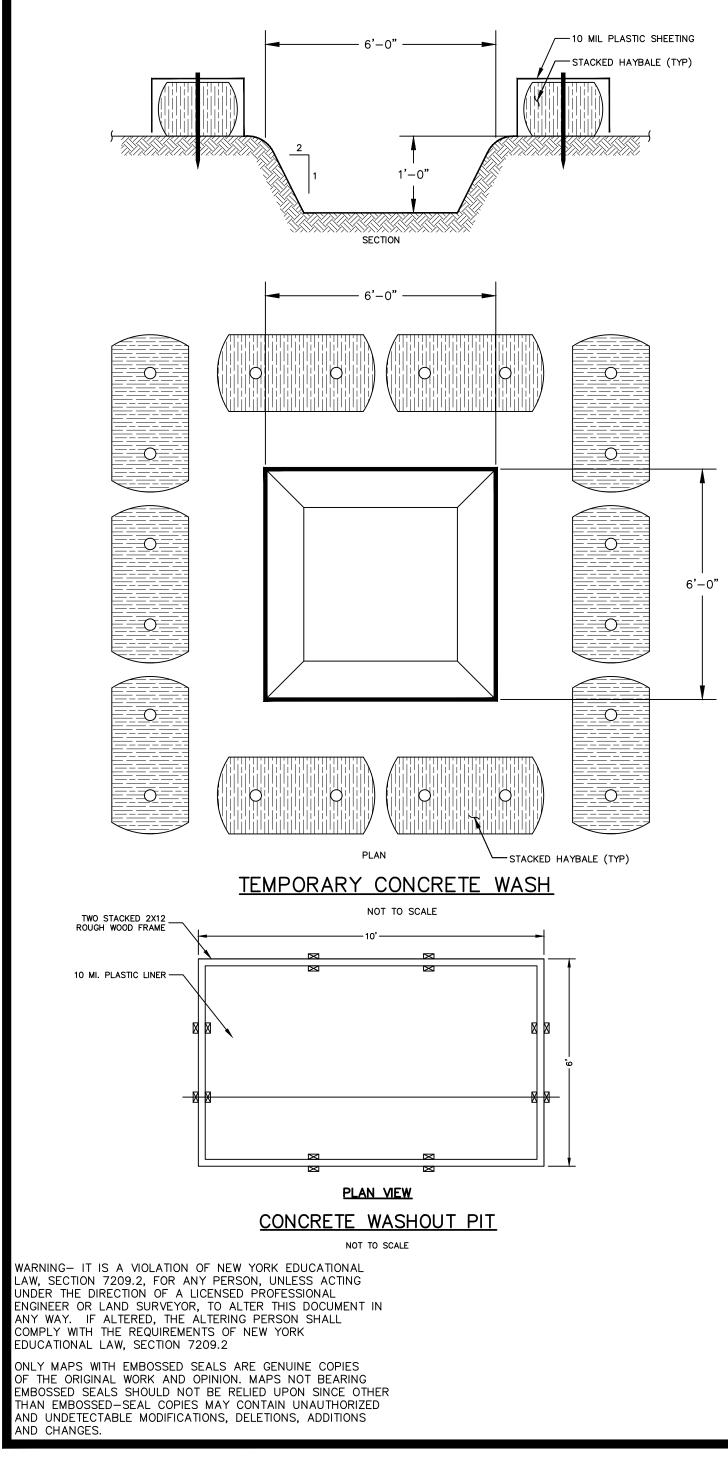

<u>STOCKPILE DETAIL</u> NOT TO SCALE

- 4. SEE SPECIFICATIONS FOR INSTALLATION OF SILT FENCE.
- 2. MAXIMUM SLOPE OF STOCKPILES SHALL BE 2:1.
- INSTALLATION NOTES: 1. AREA CHOSEN FOR STOCKPILING OPERATIONS SHALL BE DRY AND STABLE

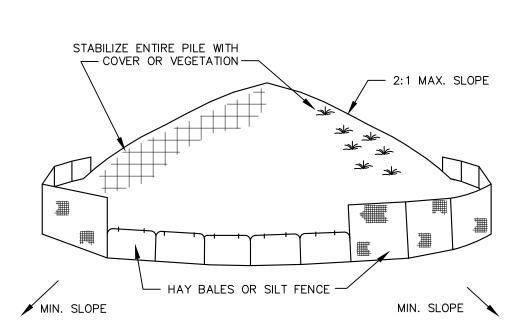

14. STRUCTURAL MEASURES MUST BE MAINTAINED TO BE EFFECTIVE. IN GENERAL, THESE MEASURES MUST BE PERIODICALLY INSPECTED TO INSURE STRUCTURAL INTEGRITY, TO DETECT VANDALISM DAMAGE, AND FOR CLEANING AND REPAIR WHENEVER NECESSARY. 15. DURING CONSTRUCTION, ALL STRUCTURES SHOULD BE INSPECTED WEEKLY AND AFTER EVERY RAIN. REMOVE ACCUMULATED SEDIMENT AND STOCKPILE AND STABILIZE IN AN AREA NOT SUBJECT TO FURTHER EROSION. 16. AFTER CONSTRUCTION IS COMPLETED, PERMANENT SEDIMENT OR EROSION CONTROL STRUCTURES SHOULD BE INSPECTED AT LEAST SEMI-ANNUALLY AND AFTER EVERY RAIN.

10. AFTER COMPLETION OF SITE CONSTRUCTION, FINE GRADE AND SPREAD TOPSOIL ON ALL LAWN AREAS AND SEED WITH PERMANENT LAWN MIX AS DISCUSSED ON THE SPECIFICATIONS FOR FOR VEGETATIVE ESTABLISHMENT ON THIS SHEET. 11. DURING THE PROGRESS OF CONSTRUCTION, MAINTAIN ALL SEDIMENT TRAPS, BARRIERS, AND FILTERS AS NECESSARY TO PREVENT THEIR BEING CLOGGED UP WITH SEDIMENT. 12. AFTER PAVEMENTS ARE INSTALLED AND PERMANENT VEGETATIVE COVER AND PLANTINGS ARE ESTABLISHED, REMOVE SEDIMENT BARRIERS AND SEED THOSE DISTURBED AREAS. 13. MAINTAIN ALL SEEDED AND PLANTED AREAS TO INSURE A VIABLE STABILIZED VEGETATIVE COVER.

BE IMMEDIATELY STABILIZED WITH TEMPORARY SEEDING AND MULCHING.

- (SEE NOTE 8), AND ERECT A SILT FENCE AROUND THE STOCKPILE. 5. PROTECT ALL TREES WHICH ARE TO REMAIN AND WHICH ARE IN OR NEAR CONSTRUCTION AREAS. 6. PERFORM NECESSARY EXCAVATION OR FILL OPERATIONS TO BRING SITE TO DESIRED SUBGRADE. A BASE COURSE. ESTABLISHMENT
- CLEARING AND SOIL DISTURBANCE.
- TO BE REPAIRED AT STORM WATER OUTLETS. CONSTRUCTION ACTIVITY
- PROBLEMS AND REPAIRED AS NECESSARY. PARKING AND ROADWAY PAVEMENTS


INTO THE STORM WATER DRAINAGE SYSTEM.

VEGETATIVE STABILIZATION

THE OWNER WILL BE RESPONSIBLE FOR THE MAINTENANCE AND OPERATION OF ALL SITE RELATED FACILITIES, INCLUDING THE STORM WATER SEDIMENT AND DETENTION BASINS AND THE FOLLOWING MEASURES AND/OR STRUCTURES, AS APPLICABLE AND SHOWN ON THE PLANS: WATER QUALITY INLETS 1. WATER QUALITY INLETS SHALL BE CLEANED OUT AT LEAST TWICE A YEAR TO REMOVE POLLUTANTS. REMOVED MATERIAL SHOULD BE TAKEN TO A TREATMENT PLANT OR APPROVED LANDFILL FOR DISPOSAL.

BEST MANAGEMENT PRACTICES FOR SITE FACILITY MAINTENANCE

3. UPON COMPLETION OF SOIL STOCKPILING EACH PILE SHALL BE SURROUNDED WITH EITHER SILT FENCING OR HAY BALES, THEN STABILIZED WITH VEGETATION OR COVERED.

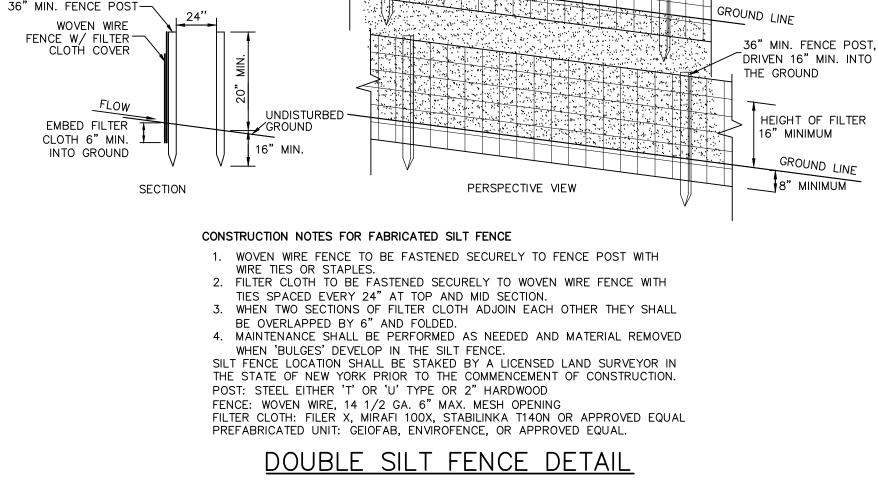

8. TEMPORARILY SEED ALL DISTURBED AREAS WHICH WILL REMAIN UNDISTURBED FOR A PERIOD OF 15 DAYS OR MORE AND WHICH WILL NOT BE UNDER CONSTRUCTION WITHIN 30 DAYS IN ACCORDANCE WITH SPECIFICATION FOR VEGETATIVE 9. IF CONSTRUCTION IS SUSPENDED OR COMPLETED, ALL DISTURBED AREAS SHALL BE SEEDED AND MULCHED IMMEDIATELY. ALL SLOPES STEEPER THAN ONE ON THREE (V/H) AND PERIMETER TRENCHES AND TRAP EMBANKMENTS SHALL, ON COMPLETION,

BEFORE ADDITIONAL AREA IS EXPOSED. EXISTING DWELLINGS AND STRUCTURES SHALL BE REMOVED PRIOR TO ANY SITE 4. CLEAR EXISTING TREES AND VEGETATION FROM AREAS TO BE EXCAVATED OR FILLED, THEN STRIP AND STOCKPILE TOPSOIL FROM ALL AREAS TO BE DISTURBED. SEED STOCKPILED TOPSOIL WITH TEMPORARY RYEGRASS COVER AS SPECIFIED BELOW 7. INSTALL SEDIMENT BARRIERS AROUND ALL STORM DRAIN INLETS, OR MODIFY SEDIMENT CONTROL MEASURES INSTALLED IN #2 ABOVE AND MAINTAIN UNTIL ALL DISTURBED AREAS ARE STABILIZED WITH VEGETATION AND ALL PAVEMENTS ARE PAVED WITH

ACRES OF UNPROTECTED SOIL SHALL BE DISTURBED AT ONE TIME. PREVIOUS EARTHWORK SHALL BE STABILIZED AS SPECIFIED

BALE BERMS TO PREVENT DOWN STREAM AND DOWN GRADIENT SILTATION. SEDIMENT & EROSION CONTROL NOTES & CONSTRUCTION SEQUENCING 1. CONSTRUCT STABILIZED CONSTRUCTION ENTRANCES FOR ALL ROAD AND DRIVE ENTRANCES. STREETS SHALL BE CLEANED 2. INSTALL SEDIMENT BARRIERS/SWALES/DITCHES/DIKES AT DOWN SLOPE AREAS FROM ALL PROPOSED GRADING OPERATIONS, AND INSTALL OTHER SEDIMENTATION AND EROSION CONTROL STRUCTURES OR MEASURES AS SHOWN ON THE DRAWINGS. 3. LAND DISTURBANCE SHALL BE LIMITED TO ONLY THAT AREA NECESSARY FOR DEVELOPMENT. NO MORE THAN FIVE (5)

1. CONSTRUCTION ACTIVITIES WILL OCCUR DURING WEEKDAYS COMMENCING AT 7:00 AM AND TERMINATING AT 6:00 PM EROSION AND SILTATION CONTROL NOTES: 1. GRADED AREAS - UPPER ELEVATIONS: PROVIDE TEMPORARY DRAINAGE SWALES, 1% GRADE MIN., TO DIRECT RUNOFF AWAY FROM CONSTRUCTION SITES. DISCHARGE AREAS AND ENERGY DISPERSION REQUIREMENTS TO BE ACCEPTABLE TO OWNER. 2. GRADED AREAS - LOWER ELEVATIONS: PROVIDE DRAINAGE SWALES, 1% MIN. GRADES, WITH STAKED AND SECURED HAY

EACH RAIN EVENT. PLANTING (OR SEEDING) SHALL BE MAINTAINED IN A VIABLE CONDITION TO STABILIZE THE SOIL AND TO PREVENT SOIL EROSION. RESTORE ALL SITE PLANTING AND/OR SEEDING WHICH HAS BEEN DAMAGED TO A VIABLE CONDITION. 2. IF VEGETATIVE STABILIZATION HAS BEEN DAMAGED FROM STORM WATER EROSION, CORRECT UPSTREAM CONDITIONS WHICH CAUSED THE EROSION. CHECK DAMS MAY BE REQUIRED IN DRAINAGE WAYS, AND STONE OUTFALL APRONS MAY BE REQUIRED

2. STORM WATER INLETS THROUGHOUT THE SITE SHALL BE INSPECTED ANNUALLY FOR ACCUMULATED SEDIMENT OR OTHER

1. PARKING AREA AND ROADWAY PAVEMENTS SHALL BE SWEPT ON A REGULAR BASIS TO REMOVE ACCUMULATED SEDIMENT.

COLLECTED SEDIMENT SHALL BE REMOVED TO AN APPROVED DISPOSAL SITE WHICH WILL NOT ALLOW THE RE-ENTRANCE OF SILT 1. ALL VEGETATIVE PLANTING ON AREAS WHICH HAVE BEEN DISTURBED AND ARE FINISH GRADED SHALL BE INSPECTED AFTER

PERMITTED

NOXIOUS WEEDS. SPREAD MULCH UNIFORMLY, MECHANICALLY, OR BY HAND TO A DEPTH OF 1-2 INCHES. POUNDS OF WOOD CELLULOSE FIBER PER 100 GALLONS OF WATER.

PERMANENT SEEDIN

AREA SHOULD APPEAR UNIFORM AFTER BINDER APPLICATION. 2. TEMPORARY SEEDING:

LIME: 100 POUNDS OF DOLOMITIC LIMESTONE PER 1,000 SF FERTILIZER: 15 POUNDS OF 10-10-10 PER 1,000 SF SEED: PERENNIAL RYE-0.92 POUNDS PER 1,000 SF

NO FILLS MAY BE PLACED ON FROZEN GROUND. ALL FILL TO BE PLACED IN APPROXIMATELY HORIZONTAL LAYERS, EACH LAYER HAVING A LOOSE THICKNESS OF NOT MORE THAN 8 INCHES. ALL FILL IN ROADWAYS AND PARKING AREAS IS TO BE CLASSIFIED TYPE 2 COMPACTED TO 90% DENSITY; COMPACTION TO BE DETERMINED BY ASTM D-1557-66T (MODIFIED PROCTOR). ANY FILL WITHIN THE BUILDING AREA IS TO BE COMPACTED TO A MINIMUM OF OF 95% AS DETERMINED BY METHODS PREVIOUSLY MENTIONED. FILLS FOR POND EMBANKMENTS SHALL BE COMPACTED AS PER THE PROJECT ENGINEER'S SPECIFICATIONS. ALL OTHER FILLS SHALL BE COMPACTED SUFFICIENTLY SO AS TO BE STABLE AND PREVENT EROSION AND SLIPPAGE.

4. PERMANENT SOD: INSTALLATION OF SOD SHOULD FOLLOW THE PERMANENT SEEDING DATES. PERMANENT SOD IS TO BE STATE APPROVED SOD; LIME AND FERTILIZER PER PERMANENT SEEDING SPECIFICATIONS AND LIGHTLY IRRIGATE SOIL PRIOR TO LAYING SOD. SOD IS TO BE LAID ON THE CONTOUR WITH ALL ENDS TIGHTLY ABUTTING. JOINTS ARE TO BE STAGGERED BETWEEN ROWS. WATER AND ROLL OR TAMP SOD TO INSURE POSITIVE ROOT CONTACT WITH THE SOIL. ALL SLOPES STEEPER THAN 3:1, AS SHOWN, ARE TO BE PERMANENTLY SODDED OR PROTECTED WITH APPROVED EROSION CONTROL NETTING. ADDITIONAL WATERING FOR ESTABLISHMENT MAY BE REQUIRED. SOD IS NOT TO BE APPLIED ON FROZEN GROUND. SOD SHALL NOT BE HARVESTED OR TRANSPLANTED WHEN MOISTURE CONTENT (DRY OR WET) AND/OR EXTREME TEMPERATURE MAY ADVERSELY AFFECT ITS SURVIVAL. IN THE ABSENCE OF ADEQUATE RAINFALL, IRRIGATION SHOULD BE PERFORMED TO INSURE ESTABLISHED SOD.

SLOPE STABLIZATION, SEEDING METHOD & MULCHING

SLOPES OR 4:1 OR GREATER (HORIZONTAL : VERTICAL) SLOPES SHALL BE HYDROSEEDED WITH THE MIXTURES AND RATES INDICATED IN THE PERMANENT SEEDING MIXTURE SCHEDULE. STRAW OR HAY MULCH SHALL BE APPLIED AT A RATE OF 2,000 LBS./ACRE. STRAW OR HAY MULCH SHALL BE ANCHORED WITH BIOD-Mesh60 NETTING AS MANUFACTURED BY ROLANKA INTERNATIONAL OR APPROVED EQUIVALENT. NETTING TO BE INSTALLED PER MANUFACTURER SPECIFICATIONS.

AREA SHALL BE SEEDED BY HYDROSEEDING OR BRODCASTING WITH THE MIXTURES AND RATES INDICATED ON THE PERMANENT SEEDING MIXTURE SCHEDULE. HYDROSEEDED AREAS SHALL BE MULCHED WITH A WOOD FIBER MULCH APPLIED AT A RATE OF 500 LBS./ACRE. BROADCAST AREAS SHAL BE MULCHED WITH HAY OR STRAW AT A RATE OF 2,000 LBS./ACRE. AREAS SEEDED BY BROADCASTING SHALL BE LIGHTLY RAKED AND PACED PRIOR TO PLACING

AREAS REMAINING DISTURBED FOR 20 DAYS OR MORE SHALL BE STABLIZED AS FOLLOWS: SCARIFY SOILS IF COMPACTED, LIME TO pH OF 6.0 IF REQUIRED, FERTILIZE WITH 600 LBS./ACRE. 5-10-10 FERTILIZER IF REQUIRED. SEED WITH SPECIES AND RATE SHOWN BELOW. MULCH WITH HAY OR STRAW AT A RATE OF 2,000 LBS./ACRE. ANCHOR MULCH WITH NETTING OF WOOD FIBER OR JUTE IF STEEP SLOPE OR HIGH

SPECIES RYEGRASS (ANNUAL OR PERENNIAL) (USE WINTER RYE IF SEEDING IN OCT./NOV.)


<u>GENTLE SLOPE AND FLAT AREAS</u> MULCH. POTENTIAL FOR EROSION.

— 10' MAX C. TO C. — WOVEN WIRE FENCE

NOT TO SCALE

SPECIFICATIONS FOR VEGETATIVE ESTABLISHMENT:

A. SEEDBED PREPARATION: AREA TO BE SEEDED SHALL BE LOOSE AND FRIABLE TO A DEPTH OF AT LEAST 3 INCHES. THE TOP LAYER SHALL BE LOOSENED BY RAKING, DISKING OR OTHER ACCEPTABLE MEANS BEFORE SEEDING OCCURS. FOR SITES LESS THAN 5 ACRES, APPLY 100 POUNDS OF DOLOMITIC LIMESTONE AND 21 POUNDS OF 10-20-20 FERTILIZER PER 1,000 SF. HARROW OR DISK LIME AND FERTILIZER INTO THE SOIL TO A DEPTH OF AT LEAST 3 INCHES ON SLOPES FLATTER THAN 3:1. B. SEEDING: APPLY 5-6 POUNDS PER 1,000 SF OF SEED MIX BETWEEN FEBRUARY 1 AND MAY 15 OR BETWEEN AUGUST 15 AND OCTOBER 31. APPLY SEED UNIFORMLY ON A MOIST FIRM SEEDBED WITH A CYCLONE SEEDED DRILL, CULTIPACKR SEEDER OR HYDROSEEDER (SLURRY INCLUDES SEEDS AND FERTILIZER, RECOMMENDED ON STEEP SLOPES ONLY). MAXIMUM SEED DEPTH SHOULD BE 1/4 INCH IN CLAYEY SOILS AND 1/2 INCH IN SANDY SOILS WHEN USING OTHER THAN THE HYDROSEEDER METHOD. IRRIGATE IF SOIL MOISTURE IS DEFICIENT TO SUPPORT ADEQUATE GROWTH UNTIL VEGETATION IS FIRMLY ESTABLISHED. SELECT SEED MIXTURES FROM SECTION 3, NYS GUIDELINES FOR URBAN EROSION & SEDIMENT CONTROL. C. MULCHING: MULCH SHALL BE APPLIED TO ALL SEEDED AREAS IMMEDIATELY AFTER SEEDING. DURING THE TIME PERIODS WHEN SEEDING IS NOT PERMITTED, MULCH SHALL BE APPLIED IMMEDIATELY AFTER GRADING. MULCH SHALL BE UNROTTED, UNCHOPPED, SMALL GRAIN STRAW APPLIED AT A RATE OF 2 TONS PER ACRE OR 90 POUNDS PER 1,000 SQUARE FEET (2 BALES). IF A MULCH ANCHORING TOOL IS USED, APPLY 2.5 TONS PER ACRE. MULCH MATERIALS SHALL BE RELATIVELY FREE OF ALL KINDS OF WEEDS AND SHALL BE COMPLETELY FREE OF PROHIBITED D. SECURING STRAW MULCH: STRAW MULCH SHALL BE SECURED IMMEDIATELY FOLLOWING MULCH APPLICATIONS TO MIMIMIZE MOVEMENT OF WIND OR WATER. THE FOLLOWING METHODS ARE USE A MULCH ANCHORING TOOL WHICH IS DESIGNED TO PUNCH AND ANCHOR FABRIC TYPE MULCH INTO THE SOIL SURFACE TO A MINIMUM DEPTH OF 2 INCHES. THIS IS THE MOST EFFECTIVE METHOD FOR SECURING MULCH, HOWEVER, IT IS LIMITED TO RELATIVELY FLAT AREAS WHERE EQUIPMENT CAN OPERATE SAFELY. ii. WOOD CELLULOSE FIBER MAY BE USED FOR ANCHORING STRAW. APPLY THE FIBER BINDER AT A NET DRY WEIGHT OF 750 POUNDS PER ACRE. IF MIXED WITH WATER, USE 50 iii. LIQUID BINDERS MAY BE USED AND APPLIED HEAVIER AT THE EDGES WHERE WIND CATCHES MULCH, SUCH AS IN VALLEYS AND ON CRESTS OF SLOPES. THE REMAINDER OF THE iv. LIGHTWEIGHT NETTING, MAY BE USED TO SECURE MULCH. THE NETTING WILL BE STAPLED TO THE GROUND ACCORDING TO MANUFACTURERS' RECOMMENDATIONS.

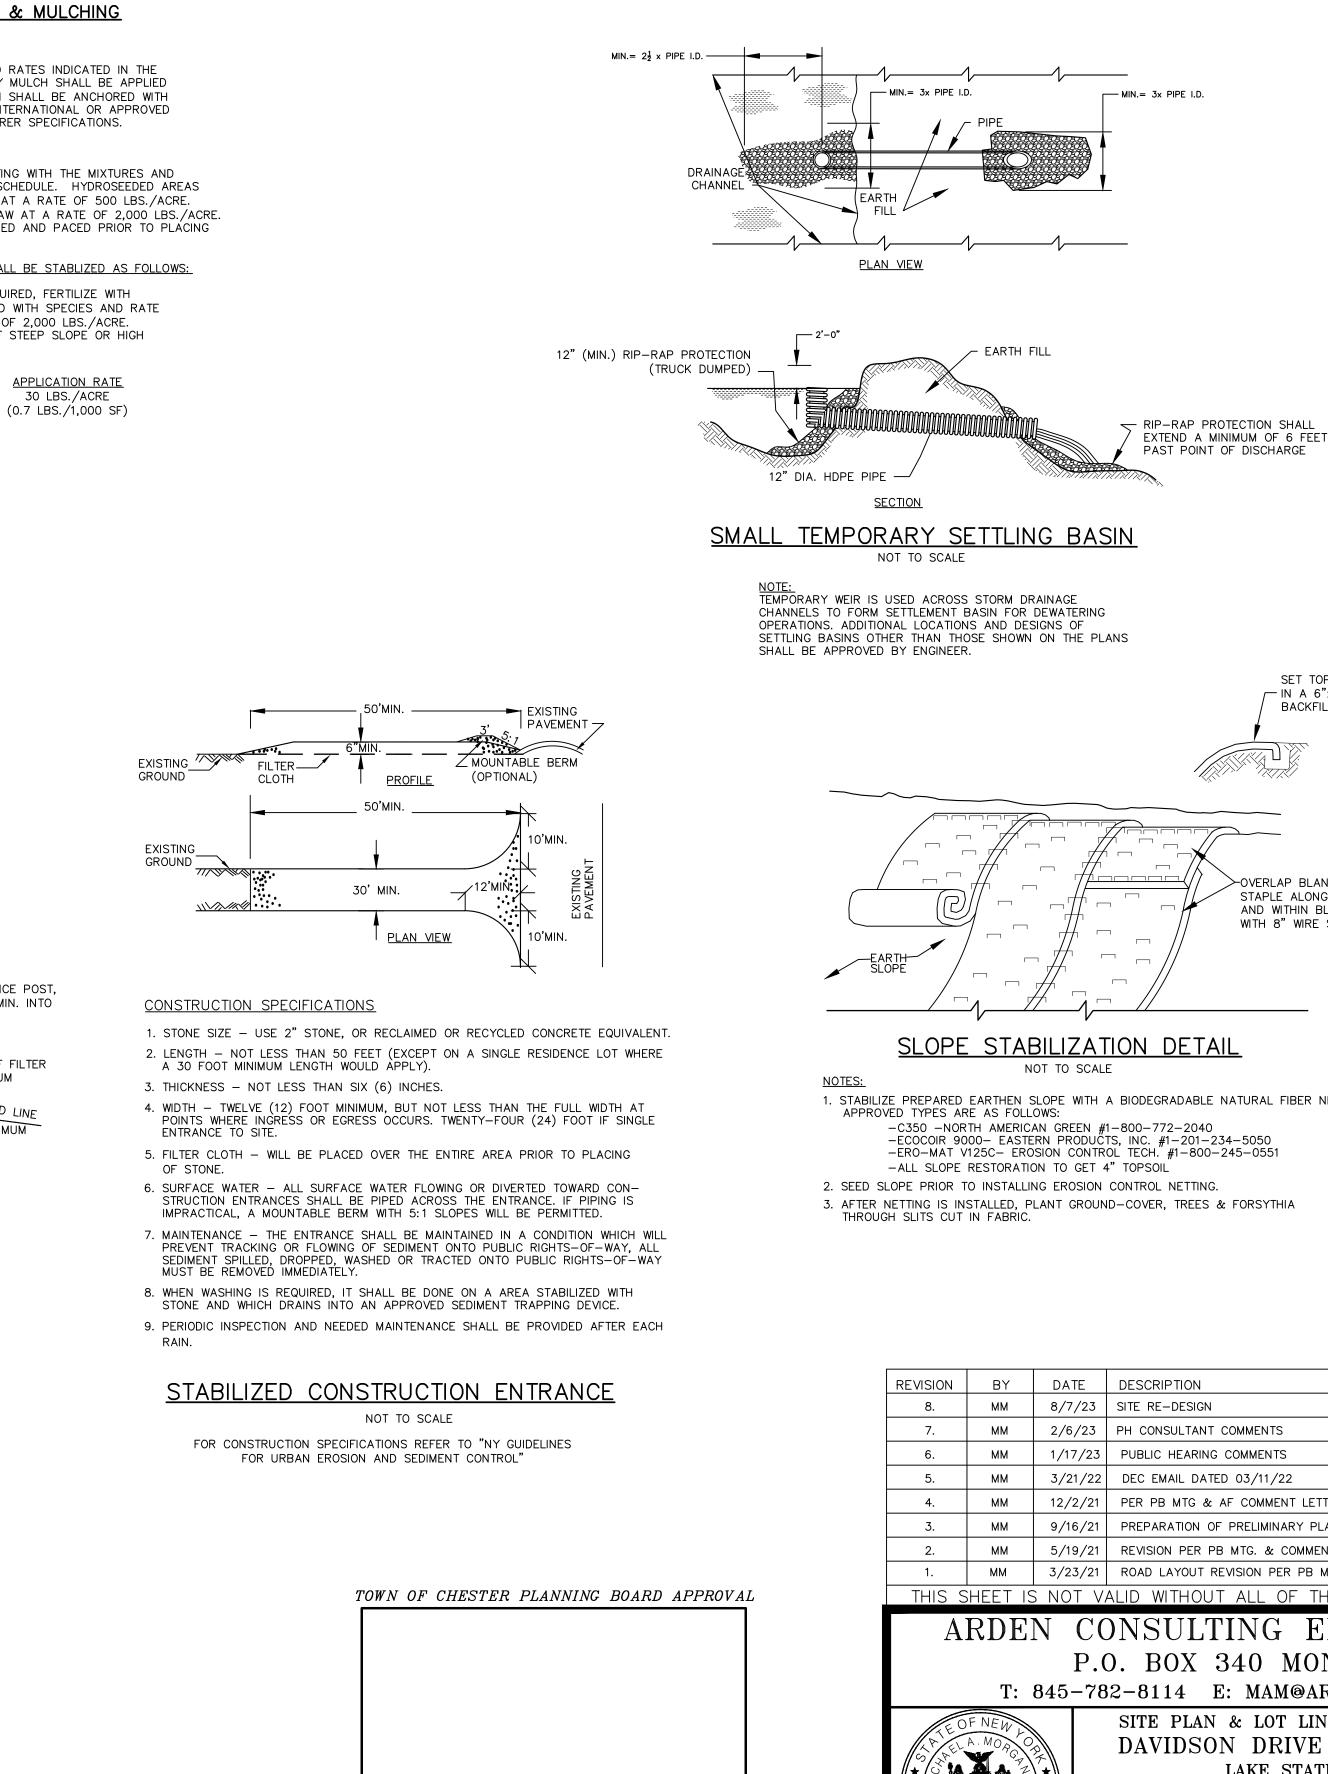

COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. – ALL RIGHTS RESERVED


ICHAEL A. MORGANTE, P.1

LIC. NO. 78577

OVERLAP BLANKETS 4" MIN. STAPLE ALONG SEAMS AT 12" O.C.	
AND WITHIN BLANKET @ 3' O.C. WITH 8" WIRE STAPLES	
└ · · //	
\neg //	
¬ //	
<u>TION DETAIL</u>	
A BIODEGRADABLE NATURAL FIBER NETTING	
#1-800-772-2040 CTS, INC. #1-201-234-5050	
ROL TECH. #1-800-245-0551	
4" TOPSOIL I CONTROL NETTING.	
ND-COVER, TREES & FORSYTHIA	
DESCRIPTION	
SITE RE-DESIGN	
PH CONSULTANT COMMENTS	
PUBLIC HEARING COMMENTS	
DEC EMAIL DATED 03/11/22	
PER PB MTG & AF COMMENT LETTER	
PREPARATION OF PRELIMINARY PLANS	
REVISION PER PB MTG. & COMMENT LETTERS	
ROAD LAYOUT REVISION PER PB MTG.	
ALID WITHOUT ALL OF THE SHEETS THAT COMPRISE	THE SET
ONSULTING ENGINEERS, PL	LC
O. BOX 340 MONROE, N.Y.	
82-8114 E: MAM@ARDENCONSULTING.NET	100 //
SITE PLAN & LOT LINE COMBINATION FOR	JOB#: 20-030
DAVIDSON DRIVE HOLDINGS, LLC	SCALE:
LAKE STATION ROAD	AS NOTED DATE:
TOWN OF CHESTER, COUNTY OF ORANGE, NY	03-21-22
	DRAWN:
EROSION AND SEDIMENT	MM CHECKED:
CONTROL DETAILS	MM SHEET NO
	SHEET NO. 11 OF 22


SET TOP OF BLANKET - IN A 6"x6" TRENCH

BACKFILL W/ SOIL

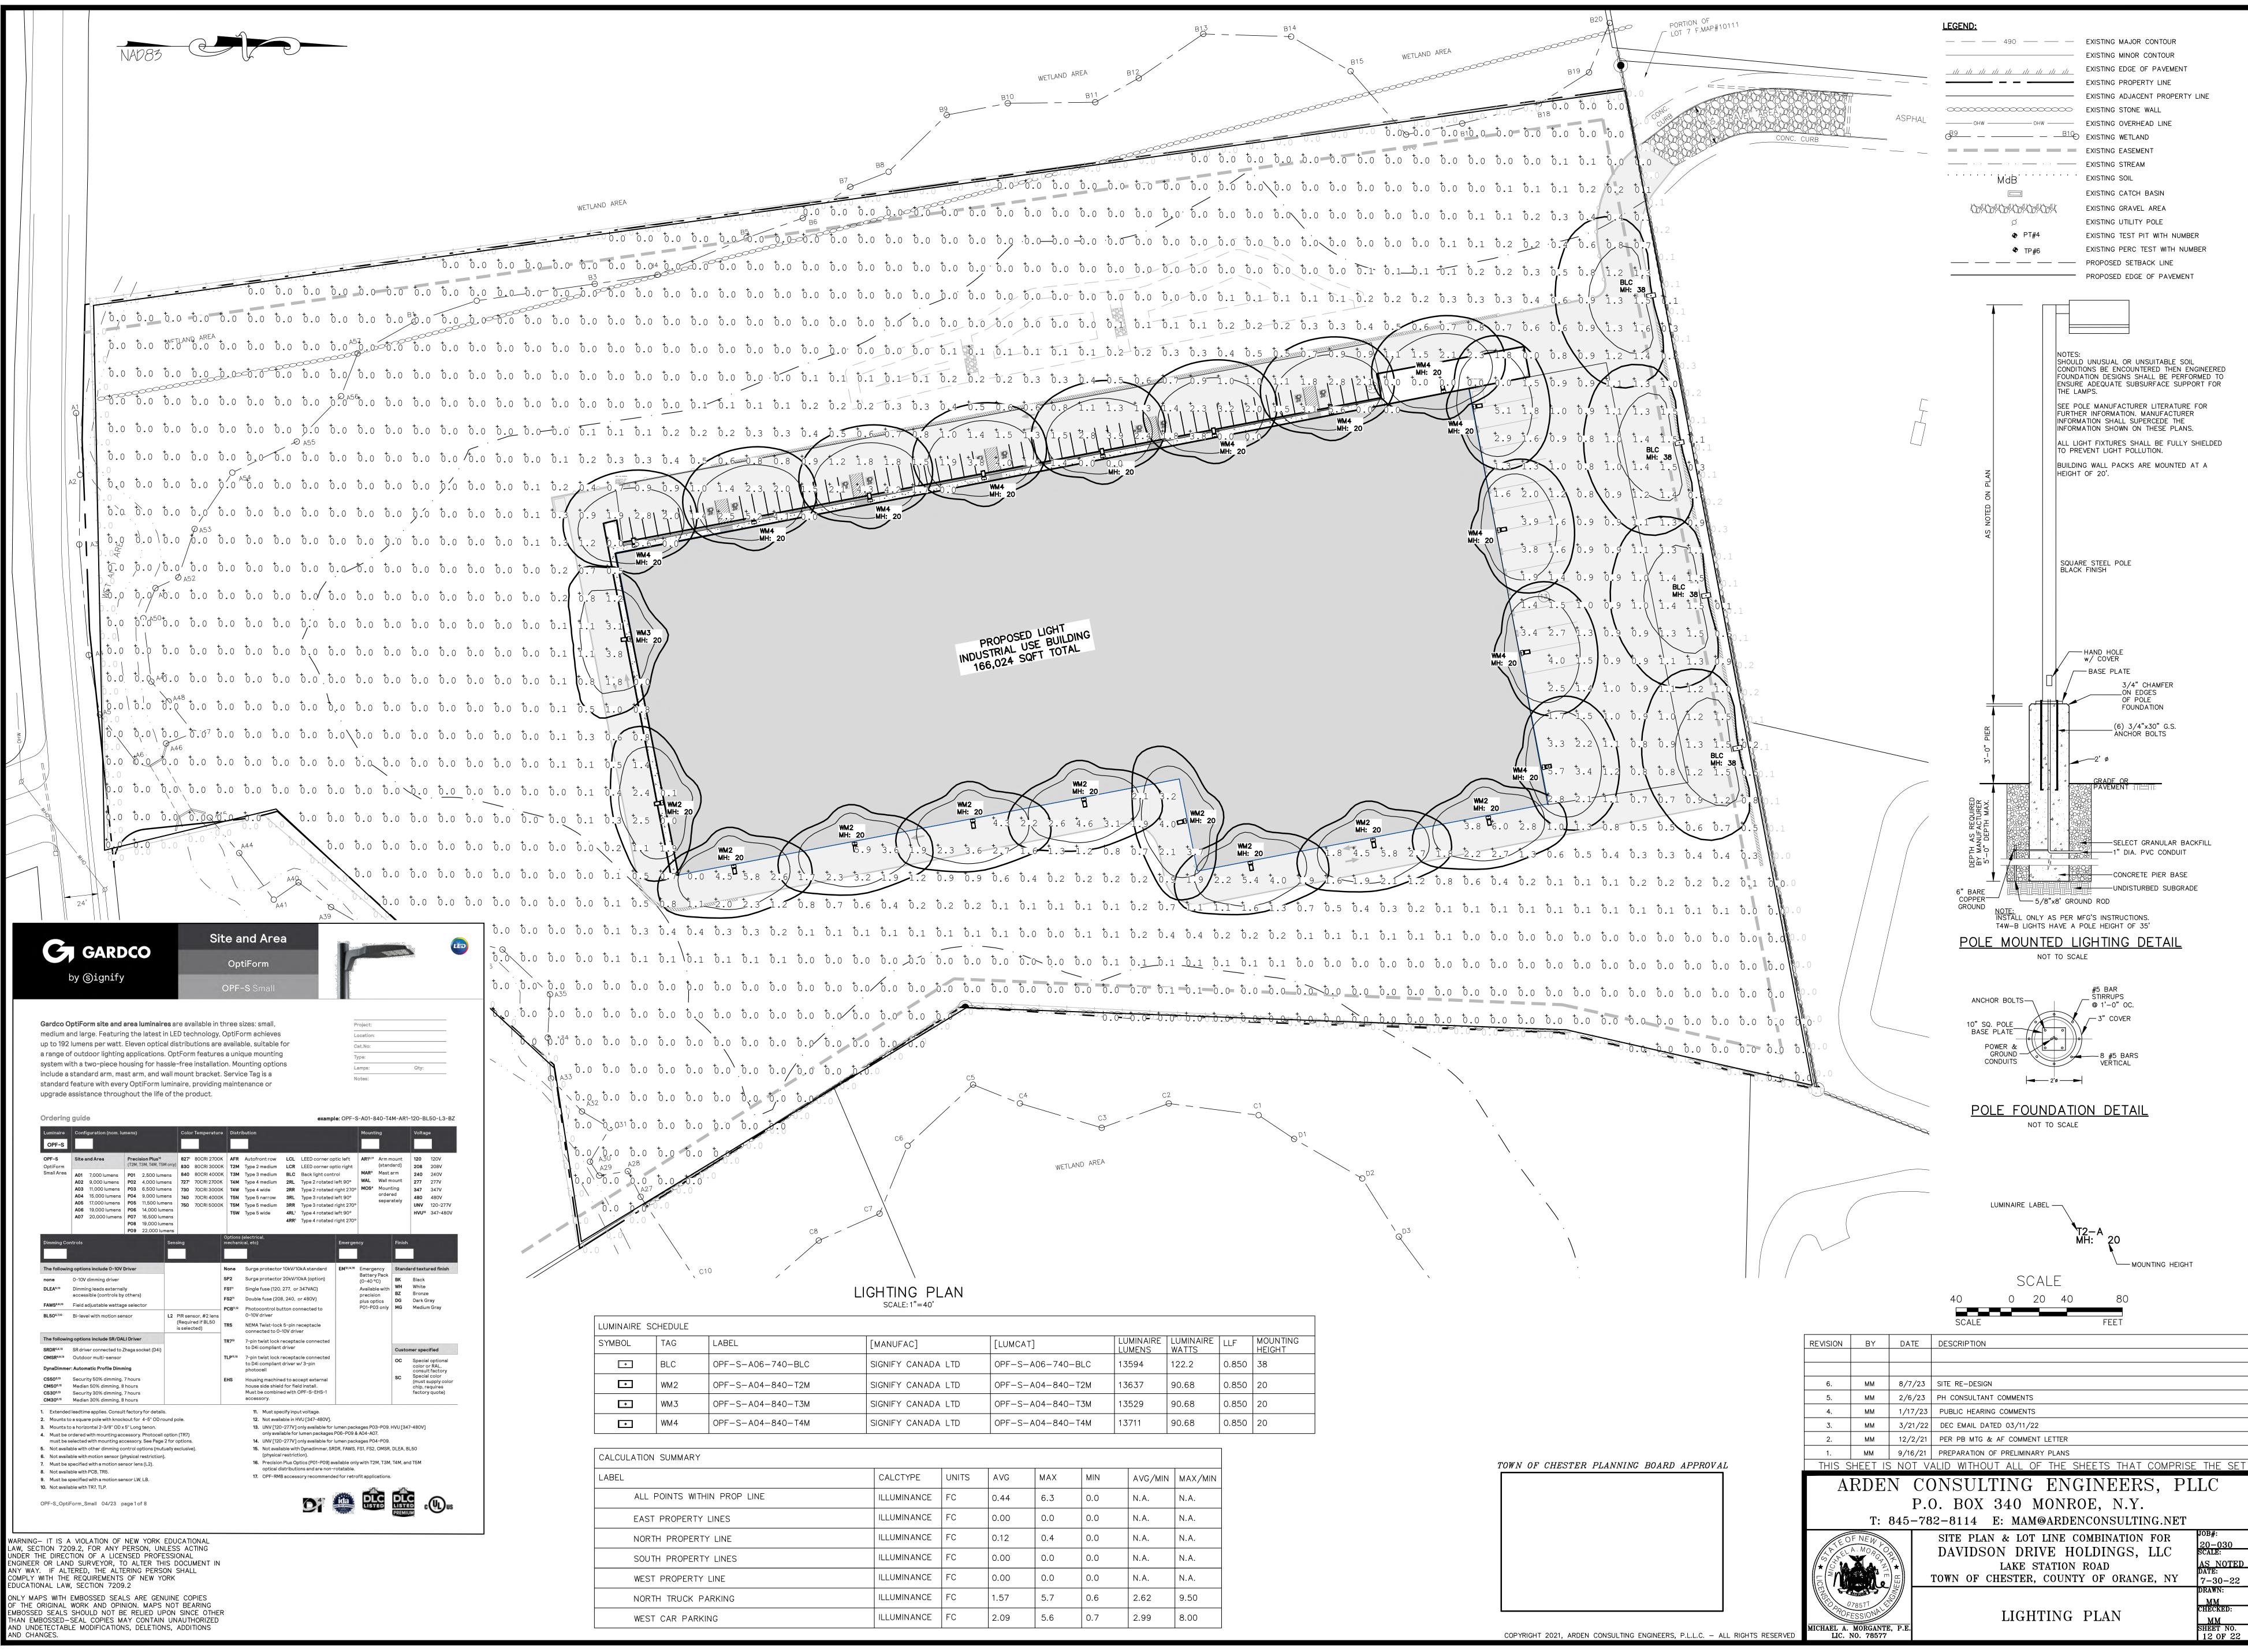

111L 3C										
L	TAG	LABEL	[MANUFAC]	[LUMCAT]	LUMINAIRE LUMENS	LUMINAIRE WATTS	LLF	MOUNTING HEIGHT		
	BLC	OPF-S-A06-740-BLC	SIGNIFY CANADA LTD	OPF-S-A06-740-BLC	13594	122.2	0.850	38		
·]	WM2	OPF-S-A04-840-T2M	SIGNIFY CANADA LTD	OPF-S-A04-840-T2M	13637	90.68	0.850	20		
	WM3	OPF-S-A04-840-T3M	SIGNIFY CANADA LTD	OPF-S-A04-840-T3M	13529	90.68	0.850	20		
	WM4	OPF-S-A04-840-T4M	SIGNIFY CANADA LTD	OPF-S-A04-840-T4M	13711	90.68	0.850	20		

-	CALCTYPE	UNITS	AVG	МАХ	MIN	AVG/MIN	MAX/MIN
ALL POINTS WITHIN PROP LINE	ILLUMINANCE	FC	0.44	6.3	0.0	N.A.	N.A.
EAST PROPERTY LINES	ILLUMINANCE	FC	0.00	0.0	0.0	N.A.	N.A.
NORTH PROPERTY LINE	ILLUMINANCE	FC	0.12	0.4	0.0	N.A.	N.A.
SOUTH PROPERTY LINES	ILLUMINANCE	FC	0.00	0.0	0.0	N.A.	N.A.
WEST PROPERTY LINE	ILLUMINANCE	FC	0.00	0.0	0.0	N.A.	N.A.
NORTH TRUCK PARKING	ILLUMINANCE	FC	1.57	5.7	0.6	2.62	9.50
WEST CAR PARKING	ILLUMINANCE	FC	2.09	5.6	0.7	2.99	8.00

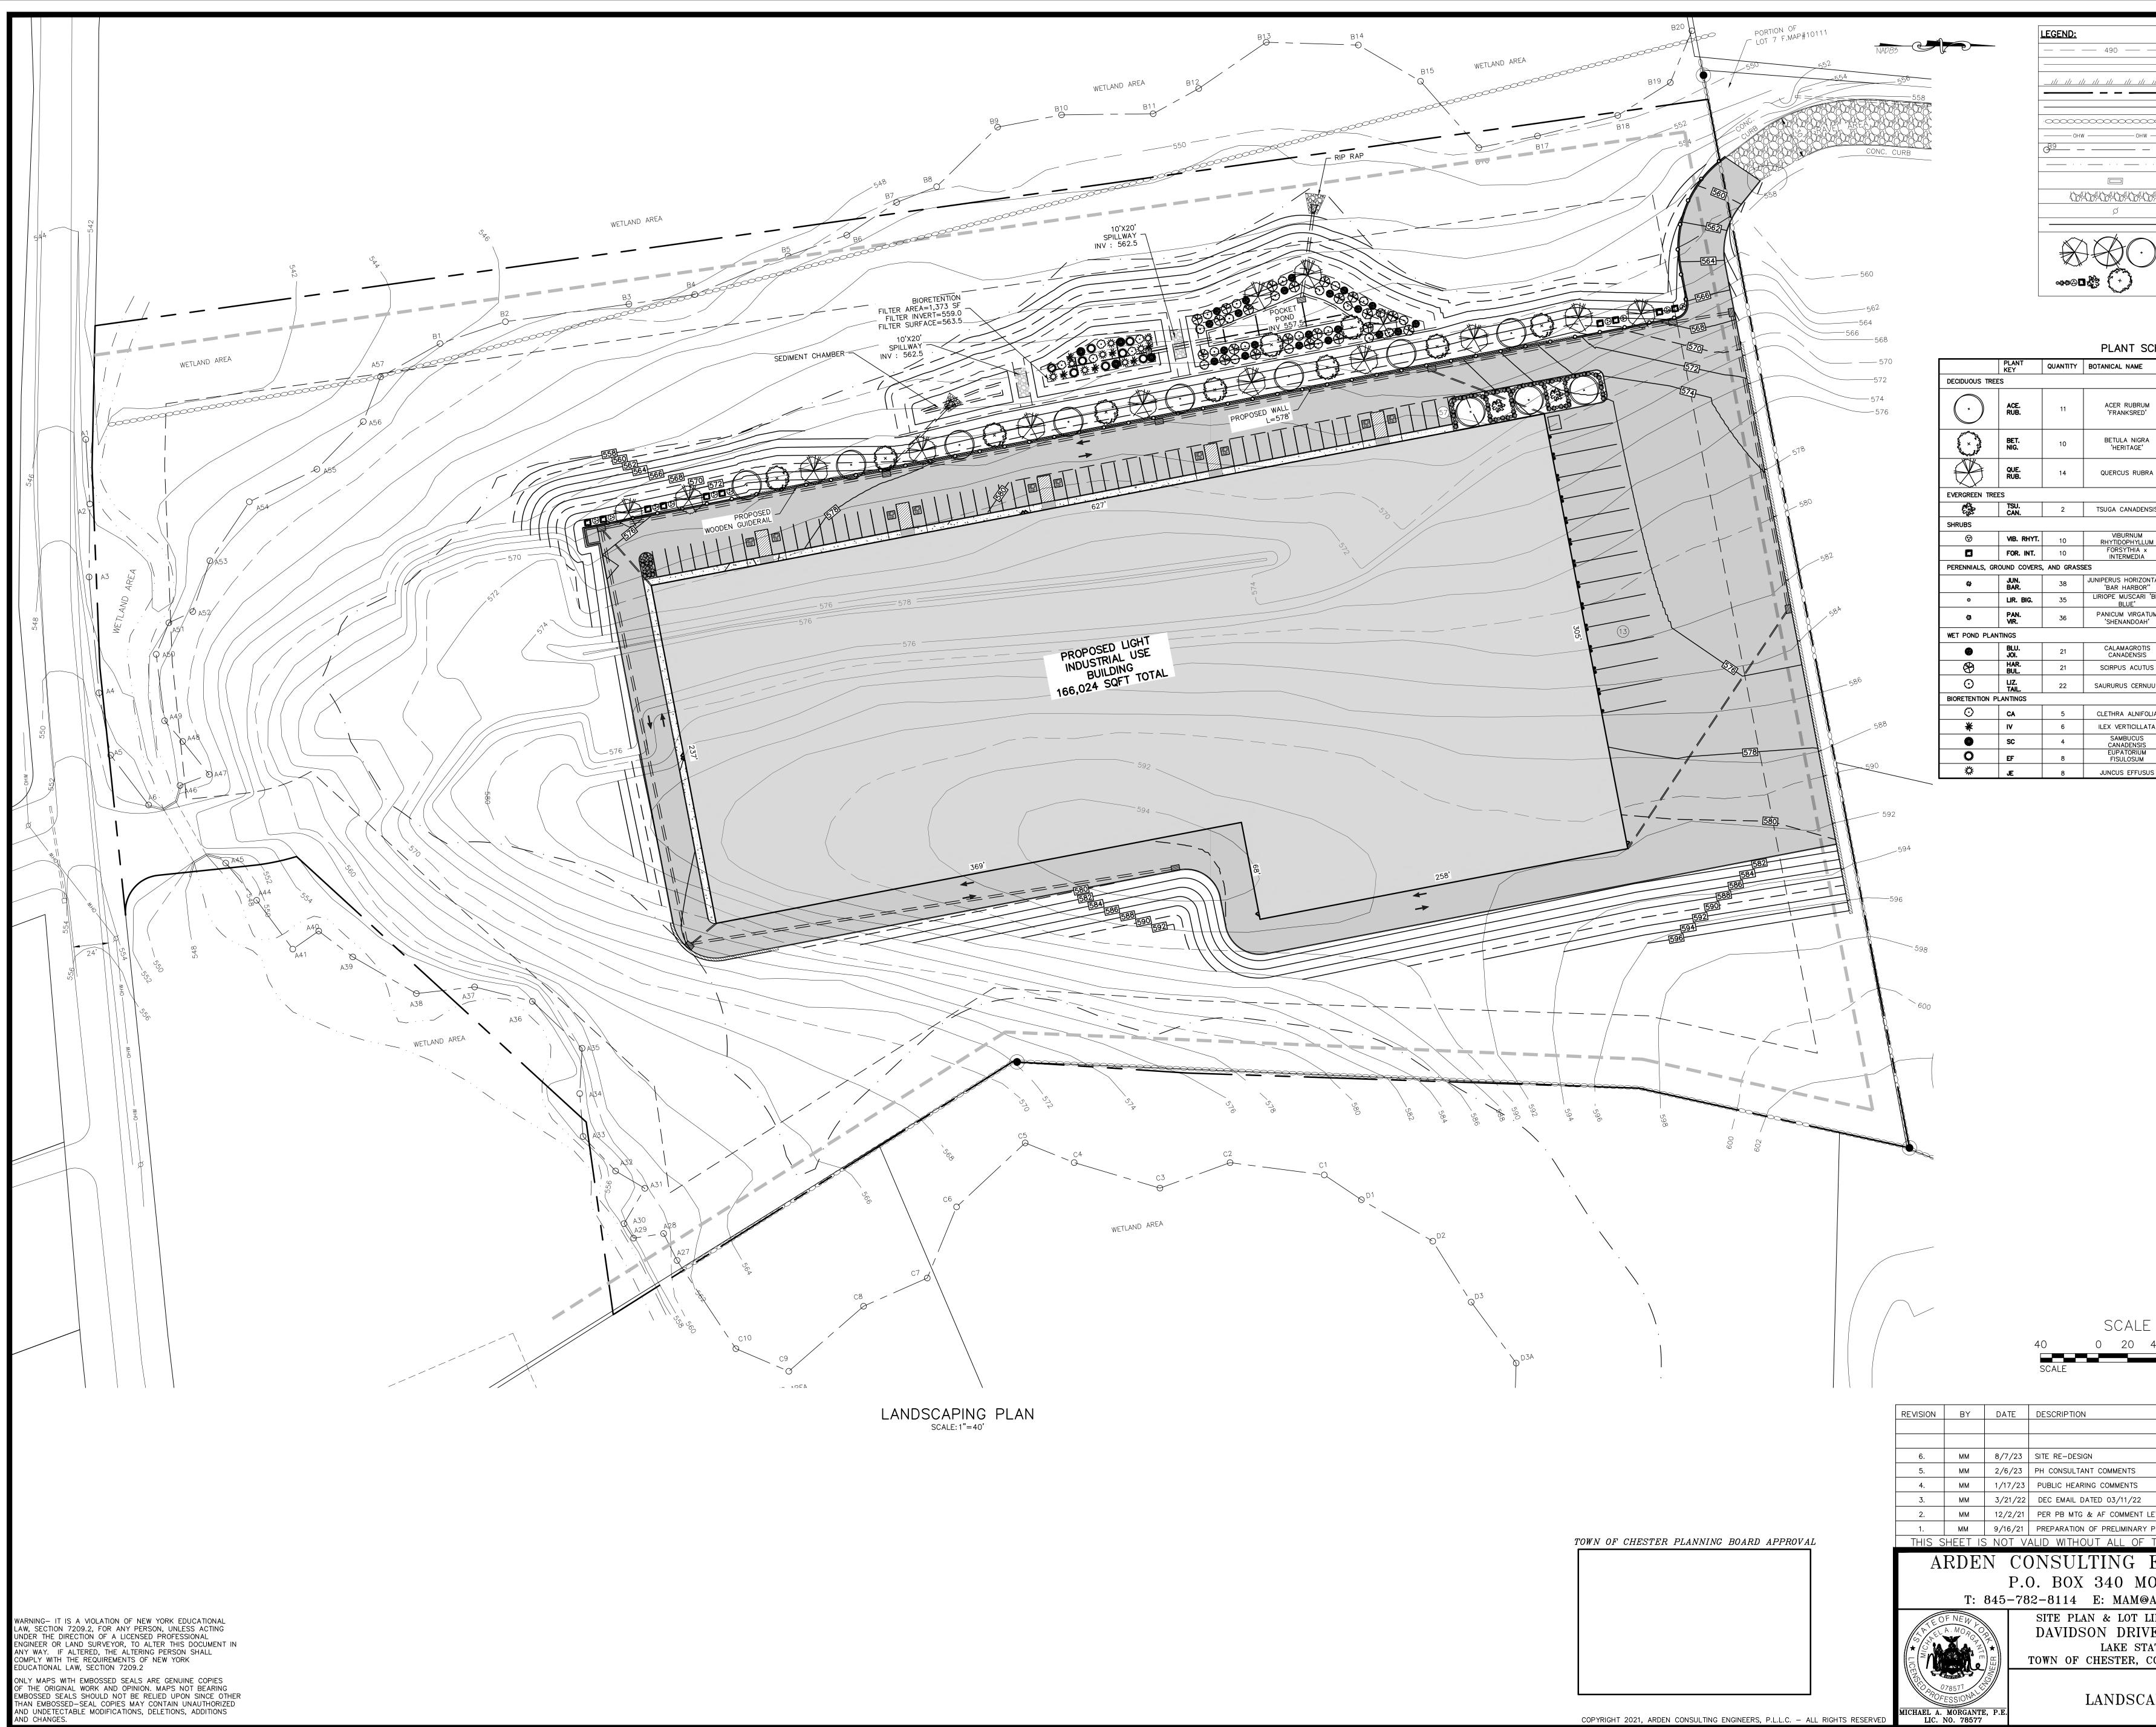


COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. – ALL RIGHTS RESERVED **MICHAEL A. MORGANTE, P.E.** LIC. NO. 78577

), <u> </u>	EXISTING MAJOR CONTOUR
	EXISTING MINOR CONTOUR
<u></u>	EXISTING EDGE OF PAVEMENT
	EXISTING PROPERTY LINE
	EXISTING ADJACENT PROPERTY LINE
	EXISTING STONE WALL
—— онш ———	EXISTING OVERHEAD LINE
<u></u>	EXISTING WETLAND
· · · ·	EXISTING STREAM
	EXISTING CATCH BASIN
JAN DAN DAN	EXISTING GRAVEL AREA
3	EXISTING UTILITY POLE
	PROPOSED EDGE OF PAVEMENT
to the second se	PROPOSED LANDSCAPING

AL NAME	COMMON NAME	SIZE	REMARKS
R RUBRUM ANKSRED'	RED SUNSET RED MAPLE	2.5"-3" CAL.	B&B
ULA NIGRA ERITAGE'	HERITAGE RIVER BIRCH	12'–14'	B&B MULTISTEM
CUS RUBRA	RED OAK	2.5"-3" CAL.	B&B
		1	1
CANADENSIS	CANADIAN HEMLOCK	6'-8'	B&B
BURNUM IDOPHYLLUM	LEATHERLEAF VIBURNUM	5-6' MIN.	SPACE 8'
RSYTHIA x TERMEDIA	FORSYTHIA	5–6' MIN.	SPACE 8' APART
S HORIZONTALIS R HARBOR"	BAR HARBOR CREEPING JUNIPER	#2 CANS	CONT. 36" O.C.
MUSCARI 'BIG BLUE'	BIG BLUE LILYTURF	1 GAL.	CONT. 18" 0.C.
JM VIRGATUM ENANDOAH'	SHENANDOAH SWITCHGRASS	1 GAL.	CONT. 36" O.C.
			•
AMAGROTIS NADENSIS	BLUE JOINT	1 GAL.	CONT. 36" 0.C.
PUS ACUTUS	HARDSTEM BULRUSH	1 GAL.	CONT. 36" 0.C.
RUS CERNUUS	LIZARD'S TAIL	1 GAL.	CONT. 36" 0.C.
		1	0.01/7 70"
RA ALNIFOLIA	SUMMERSWEET	18"-24"	CONT. 36" O.C.
/ERTICILLATA	WINTERBERRY	18"-24"	CONT. 36" 0.C.
AMBUCUS NADENSIS	ELDERBERRY	18"-24"	CONT. 36" O.C.
PATORIUM SULOSUM	JOE PYE WEED	1 GAL.	CONT. 36" 0.C.
US EFFUSUS	COMMON RUSH	#SP4 CONT.	CONT. 36" 0.C.


	. 💶	
20	40	80
		FEET

IENTS	
MENTS	
/11/22	
DMMENT LETTER	
LIMINARY PLANS	
L OF THE SHEETS THAT COMPRIS	E THE SET
IG ENGINEERS, PI	LLC
O MONROE, N.Y. MAM@ARDENCONSULTING.NET	
LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC KE STATION ROAD FER, COUNTY OF ORANGE, NY	JOB#: 20-030 SCALE: AS NOTED DATE: 03-21-22
DSCAPING PLAN	DRAWN: MM CHECKED: MM SHEET NO. 13 OF 22

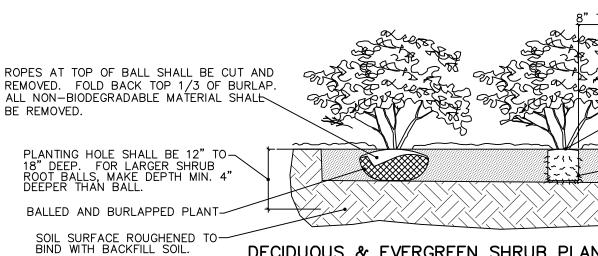


DECIDUOUS & EVERGREEN SHRUB PLANTING DETAIL NOT TO SCALE

NOTES: 1. THOROUGHLY SOAK THE GROUND COVER ROOT BALL AND ADJACENT PREPARED SOIL SEVERAL TIMES DURING THE FIRST MONTH AFTER PLANTING AND REGULARLY THROUGHOUT THE FOLLOWING TWO SUMMERS. 2. SOIL AMENDMENTS: MODIFY HEAVY CLAY OR SILT SOILS (MORE THAN 40% CLAY OR SILT) BY ADDING COMPOSTED PINE BARK (UP TO 30% BY VOLUME) OR GYPSUM MODIFY EXTREMELY SANDY SOILS (MORE THAN 85% SAND) BY ADDING ORGANIC MATTER AND/OR DRY, SHREDDED CLAY LOAM UP TO 30% OF THE TOTAL MIX. 3. ALL GROUND COVER AREAS SHALL BE TREATED WITH A PRE-EMERGENT PER MANUFACTURER'S SPECIFICATIONS

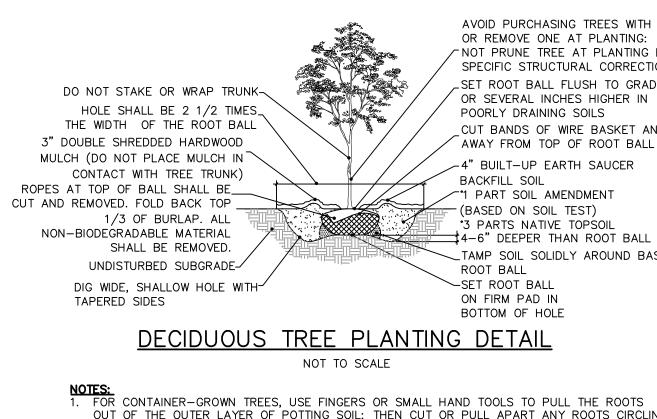


OUT OF THE OUTER LAYER OF POTTING SOIL; THEN CUT OR PULL APART ANY ROOTS CIRCLING THE PERIMETER OF THE CONTAINER 2. THOROUGHLY SOAK THE TREE ROOT BALL AND ADJACENT PREPARED SOIL SEVERAL TIMES DURING THE FIRST MONTH AFTER PLANTING AND REGULARLY THROUGHOUT THE FOLLOWING TWO SUMMERS.

3. SOIL AMENDMENTS: MODIFY HEAVY CLAY OR SILT SOILS (MORE THAN 40% CLAY OR SILT) BY ADDING COMPOSTED PINE BARK (UP TO 30% BY VOLUME) OR GYPSUM MODIFY EXTREMELY SANDY SOILS (MORE THAN 85% SAND) BY ADDING ORGANIC MATTER AND/OR DRY, SHREDDED CLAY LOAM UP TO 30% OF THE TOTAL MIX

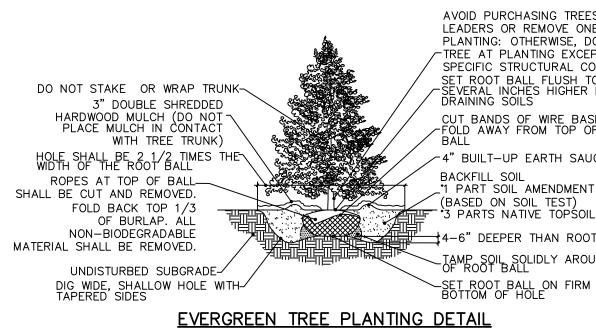

NOT TO SCALE FOR CONTAINER-GROWN TREES, USE FINGERS OR SMALL HAND TOOLS TO PULL THE ROOTS OUT OF THE OUTER LAYER OF POTTING SOIL; THEN CUT OR PULL APART ANY ROOTS CIRCLING THE PERIMETER OF THE CONTAINER. 2. THOROUGHLY SOAK THE TREE ROOT BALL AND ADJACENT PREPARED SOIL SEVERAL TIMES DURING THE FIRST MONTH AFTER PLANTING AND REGULARLY THROUGHOUT THE FOLLOWING TWO SUMMERS. 3. SOIL AMENDMENTS: MODIFY HEAVY CLAY OR SILT SOILS (MORE THAN 40% CLAY OR SILT) BY ADDING COMPOSTED PINE BARK (UP TO 30% BY VOLUME) OR GYPSUM MODIFY EXTREMELY SANDY SOILS (MORE THAN 85% SAND) BY ADDING ORGANIC MATTER AND/OR DRY, SHREDDED CLAY LOAM UP TO 30% OF THE TOTAL MIX

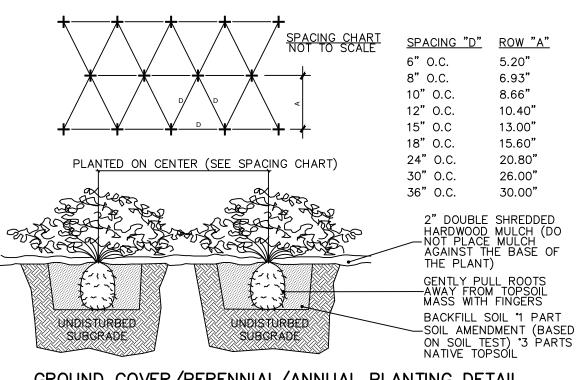

GROUND COVER/PERENNIAL/ANNUAL PLANTING DETAIL NOT TO SCALE

WARNING- IT IS A VIOLATION OF NEW YORK EDUCATIONAL LAW, SECTION 7209.2, FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR TO ALTER THIS DOCUMENT IN ANY WAY. IF ALTERED, THE ALTERING PERSON SHALL COMPLY WITH THE REQUIREMENTS OF NEW YORK EDUCATIONAL LAW, SECTION 7209.2

ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED-SEAL COPIES MAY CONTAIN UNAUTHORIZED ND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS

AND CHANGES



- TOP OF SHRUB ROOT BALL SHALL BE SET FLUSH WITH FINISHED GRADE SHREDDED HARDWOOD NOT PLACE MULCH AGAINST HE BASE OF THE PLANT -CONTAINER-GROWN PLANT WITH ROOTS PULLED OUT OF BALL

-BACKFILL SOIL PART SOIL AMENDMENT (BASED ON SOIL TEST) 3 PARTS NATIVE TOPSOIL JNDISTURBED SUBGRADE

AVOID PURCHASING TREES WITH TWO LEADERS OR REMOVE ONE AT PLANTING: OTHERWISE, DO ∽NOT PRUNE TREE AT PLANTING EXCEPT FOR SPECIFIC STRUCTURAL CORRECTIONS SET ROOT BALL FLUSH TO GRADE OR SEVERAL INCHES HIGHER IN POORLY DRAINING SOILS CUT BANDS OF WIRE BASKET AND FOLD

~4" BUILT-UP EARTH SAUCER / 1 PART SOIL AMENDMENT 3 PARTS NATIVE TOPSOIL TAMP SOIL SOLIDLY AROUND BASE OF

ON FIRM PAD IN BOTTOM OF HOLE

AVOID PURCHASING TREES WITH TWO LEADERS OR REMOVE ONE AT PLANTING: OTHERWISE, DO NOT PRUNE TREE AT PLANTING EXCEPT FOR SPECIFIC STRUCTURAL CORRECTIONS SET ROOT BALL FLUSH TO GRADE C SEVERAL INCHES HIGHER IN POORLY

CUT BANDS OF WIRE BASKET AND COLD AWAY FROM TOP OF ROOT ✓4" BUILT-UP EARTH SAUCER 1 PART SOIL AMENDMENT

TAMP SOIL SOLIDLY AROUND BASE -SET ROOT BALL ON FIRM PAD IN BOTTOM OF HOLE

ERNST SEED CO. NATIVE DETENTION AREA SEEDING SPECIFICATIONS (ERNMX-183): SWITCHGRASS, 'SHAWNEE' (PANICUM VIRGATUM, 'SHAWNEE') REDTOP PANICGRASS COASTAL PLAIN NC ECOTYPE (PANICUM RIGIDULUM (P. STIPITATUM), COASTAL PLAIN NC ECOTYPE) VIRGINIA WILDRYE, PA ECOTYPE (ELYMUS VIRGINICUS, PA ECOTYPE) GREEN BULRUSH, PA ECOTYPE (SCIRPUS ATROVIRENS, PA ECOTYPE) AUTUMN BENTGRASS, PA ECOTYPE (AGROSTIS PERENNANS, PA ECOTYPE) PATH RUSH, PA ECOTYPE (JUNCUS TENUIS, PA ECOTYPE) 1. SOW ABOVE MIX AT A RATE OF 20 LBS./ACRE OR 1/2 LB PER 1,000 S.F. . SUPPLEMENT ABOVE MIX WITH A COVER CROP OF GRAIN RYE AT 30 LBS/ACRE. 3. MOW SEEDED AREA ONCE PER YEAR IN LATE SPRING.

PLANT SELECTION THE ROLE OF PLANTS IN ALL STORM WATER MANAGEMENT FACILITIES IS TO PREVENT EROSION AND SLOW WATER MOVEMENT, HOLD OR CONVERT POLLUTANTS, ENHANCE INFILTRATION AND EVAPOTRANSPIRATION, AND ENCOURAGE WILDLIFE. THE DESIGNER CAN SELECT PLANT SPECIES OR MIXES THAT MEET THE CRITICAL OBJECTIVES AND EXTREME CONDITIONS UNDER WHICH PLANTS MUST SURVIVE. NATIVE GRASSES ESTABLISH RAPIDLY, WITH FIBROUS ROOT SYSTEMS THAT TOLERATE FAST-MOVING WATER. HERBACEOUS SPECIES PLAY THE ROLE OF ADDING AESTHETICS, TEXTURE, AND PROVIDING WILDLIFE FOOD AND HABITAT. WOODY SPECIES ASSIST IN EVAPOTRANSPIRATION, WHILE PREVENTING EROSION.

GENERAL MAINTENANCE IN ADDITION TO STRUCTURAL MAINTENANCE, SILTATION NEEDS TO BE REMOVED AS NEEDED. PLANTS NEED TO BE TRIMMED BACK TO MAINTAIN AESTHETIC VALUE AND INVASIVE SPECIES NEED TO BE CONTROLLED. CLOSE MOWING OR EXTENSIVE CHEMICAL USE IS NOT CONDUCIVE TO WATER QUALITY IMPROVEMENT AND WILDLIFE HABITAT. SITE PREPARATION

INVASIVE SPECIES, PARTICULARLY THOSE THAT WILL ADAPT TO WET CONDITIONS SHOULD BE REMOVED OR SPRAYED BEFORE THEY BECOME INCORPORATED INTO HE SITE, NORMAL VEGETATION CAN BE WORKED INTO THE TOPSOIL, WHICH SHOULD BE STOCKPILED UNTIL THE FINAL GRADE HAS BEEN ESTABLISHED. WITH THE ENGINEER'S SPECIFICATIONS AND DIMENSIONS IN HAND, ON-SITE CONSTRUCTION OF THE BERM AND OUTLETS MUST BE EXECUTED CAREFULLY IN ORDER TO MAINTAIN STRUCTURAL INTEGRITY. THE INFILTRATION AND PLAN GROWTH AREAS SHOULD BE LOOSE AND FRIABLE, HIGH IN ORGANIC MATTER, AND COMPLETED WITHOUT COMPACTIONS FROM HEAVY EQUIPMENT. BY USING THE "DIG AND DROP" METHOD, ONE CAN USE AN EXCAVATOR TO DIG AND DROP EACH AREA OF THE BOTTOM SOIL IN A LOOSE MANNER. AT THIS POINT, ONE CAN INCORPORATE LIME, COMPOSTED LEAVES, AND/OR GRASS CLIPPINGS. THE EXCAVATION MACHINE DOES NOT MOVE OVER THE FINISHED SURFACE, THUS AVOIDING UNNECESSARY COMPACTION. NATIVE VEGETATION CAN BE PLANTED OR SEEDED OVER THIS UNEVEN, ABSORBENT SURFACE. SEEDING AND PLANTING METHODS

SEEDING AND PLANTING SHOULD BEGIN IMMEDIATELY UPON COMPLETION OF THE STRUCTURE WHEN THE SOIL IS STILL FRIABLE AND BEFORE INVASIVE WEEDS EMERGE. PLAN SEEDING AND PLANTING BEFORE THE BASIN IS FLOODED. ALLOW THE BASIN TO DRAIN TO A FEW INCHES BEFORE SEEDING. BROADCAST SEED EVENLY OVER EACH UNIT BY HAND SEEDING OR HYDROSEEDING. SEEDING RATES ARE GENERALLY LOW (1/2 LB PER 1,000 SQ FT). THE USE OF A SEED FILLER; I.E., PAM-12, CAN BE ÚSED TO CREATE A MIX ÓF 10 LB PER 1,000 SQ FT (I.E., 9-1/2 LB OF PAM-12 MIXED WITH 1/2 LB OF SEED), WHICH CAN BE BROADCAST EVENLY OVER THE AREA. BARLEY, OATS, OR RYE CAN PROVIDE TEMPORARY VEGETATION TO PROTECT THE SOIL IN STORM WATER MANAGEMENT FACILITIES UNTIL PERMANENT VEGETATION CAN BE ESTABLISHED. THE USE OF NATIVE SPECIES; I.E., VIRGINIA WILD RYE, CAN CREATE AN INTERMEDIATE VEGETATIVE COVER THAT SUCCEEDS TO NATIVE LONG-TERM VEGETATION. STRAW MULCH OR STRAW COCONUT MATS ARE FREQUENTLY USED TO CONTROL EROSION AND PROTECT EMERGING SEEDLINGS FROM EXTREME TEMPERATURES AND DRYING OUT. MULCH SHOULD BE SPARSE TO ALLOW SUNLIGHT TO REACH THE GROUND. TRANSPLANTED SEEDLINGS AND SHRUBS NEED TEMPORARY WATER UNTIL THEY

BECOME WELL ROOTED. IRRIGATION OF SEEDED AREAS IS OF VALUE UNTIL

SEEDLINGS BECOME ESTABLISHED. NORTHEAST PREMIUM WILDFLOWER SEED MIXTURE SEEDLAND PRODUCT CODE: WFAR-0605 OR EQUAL PLANTING RATE: 5-10 LBS./ACRE OR 4 OZ./1000 SQ. FT. (1/2 ACRE OR LESS)

USE DOUBLE RATE IF HYDRO-SEEDING GENERAL LANDSCAPING NOTES: REVISED 2/18/2015 4. IF SAMPLES ARE REQUESTED, THE LANDSCAPE CONTRACTOR IS TO SUBMIT CERTIFICATION TAGS FROM TREES, SHRUBS AND SEED VERIFYING TYPE AND PURITY.

7. EXCESS SNOW THAT CANNOT BE ACCOMMODATED WITHIN THE SNOW DUMP AREAS MUST BE REMOVED FROM THE SITE. SOIL PREPARATION AND MULCH NOTES:


ARE NECESSARY, ADJUST THE TOPSOIL AS FOLLOWS: • MODIFY HEAVY CLAY OR SILT SOILS (MORE THAN 40% CLAY OR SILT) BY ADDING COMPOSTED PINE BARK (UP TO 30% BY VOLUME) OR GYPSUM. • MODIFY EXTREMELY SANDY SOILS (MORE THAN 85%) BY ADDING ORGANIC MATTER AND/OR DRY, SHREDDED CLAY LOAM UP TO 30% OF THE TOTAL MIX. I. TOPSOIL SHALL HAVE A PH RANGE OF 5.0–7.0 AND SHALL NOT CONTAIN LESS THAN 6% ORGANIC MATTER BY WEIGHT 5. OBTAIN TOPSOIL ONLY FROM LOCAL SOURCES OR FROM AREAS HAVING SIMILAR SOIL CHARACTERISTICS TO THAT FOUND AT THE PROJECT SITE.

ALLOW A FREE FLOW OF SURFACE WATER . WHENEVER POSSIBLE, THE SOIL PREPARATION AREA SHALL BE CONNECTED FROM PLANTING TO PLANTING. BE DRIVEN OVER BY ANY VEHICLE. 14. APPLY PRE-EMERGENT WEED CONTROL TO ALL PLANT BEDS PRIOR TO MULCHING. ENSURE COMPATIBILITY BETWEEN PRODUCT AND PLANT MATERIAL. 15. ALL PLANTING SOIL SHALL BE AMENDED WITH THE FOLLOWING:

DEPTH OF ABOUT 8 INCHES, AND EXTENDING OUT FROM THE ROOT BALL ABOUT 8 INCHES INTO THE BACKFILL. APPLY WATER TO SOIL SATURATION. • MYCOR→ TREE SAVER→ IS EFFECTIVE FOR ALL TREE AND SHRUB SPECIES EXCEPT RHODODENDRONS, AZALEAS, AND MOUNTAIN LAUREL, WHICH REQUIRE ERICOID MYCORRHIZAE. • SOIL PH: THE FUNGI IN THIS PRODUCT WERE CHOSEN BASED ON THEIR ABILITY TO SURVIVE AND COLONIZE PLANT ROOTS IN A PH RANGE OF 3 TO 9. HEALTHY START MACRO TABS 12-8-8 • FERTILIZER TABLETS ARE PLACED IN THE UPPER 4 INCHES OF BACKFILL SOIL WHEN PLANTING TREES AND SHRUBS.

THE TABLETS DIRECTLY NEXT TO THE ROOT BALL, EVENLY DISTRIBUTED AROUND ITS PERIMETER, AT A DEPTH OF ABOUT 4 INCHES. PLANT MATERIAL GUARANTEE NOTES:

CURTAILMENT OF WATER BY LOCAL AUTHORITIES SHALL BE APPROVED AND PAID FOR BY THE OWNER. 4. THE CONTRACTOR SHALL INSTRUCT THE OWNER AS TO THE PROPER CARE AND MAINTENANCE OF ALL PLANTINGS. 5. THE OWNER SHALL REMOVE AND REPLACE DYING, DEAD, OR DEFECTIVE PLANT MATERIAL ON A YEARLY BASIS AS NEEDED.

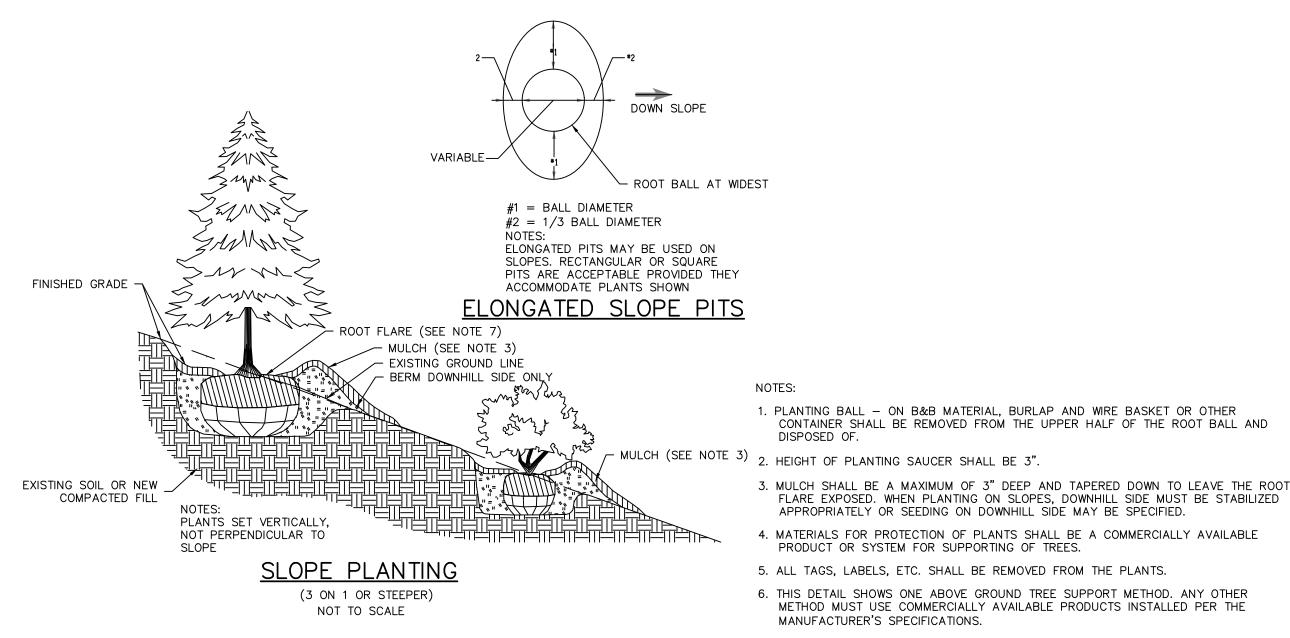

7. THE ROOT FLARE SHALL BE VISIBLE AND LEVEL WITH SURROUNDING SOIL.

- PLANT QUALITY AND HANDLING NOTES: 1. ALL PLANT MATERIAL SHALL CONFORM TO THE AMERICAN STANDARD FOR NURSERY STOCK (ANSI Z60.1–2004) OR LATEST REVISION AS PUBLISHED BY THE AMERICAN NURSERY AND LANDSCAPE ASSOCIATION. 2. IN ALL CASES, BOTANICAL NAMES LISTED WITHIN THE APPROVED OR FINAL PLANT LIST SHALL TAKE PRECEDENCE OVER COMMON NAMES. 3. ALL PLANTS SHALL BE OF SELECTED SPECIMEN QUALITY, EXCEPTIONALLY HEAVY, TIGHTLY KNIT, SO TRAINED OR FAVORED IN THEIR DEVELOPMENT AND APPEARANCE AS TO BE SUPERIOR IN FORM, NUMBER OF BRANCHES, COMPACTNESS AND SYMMETRY. ALL PLANTS SHALL HAVE A NORMAL HABIT OR SOUND, HEALTHY, VIGOROUS PLANTS WITH WELL DEVELOPED ROOT SYSTEM. PLANTS SHALL BE FREE OF DISEASE, INSECT PESTS, EGGS OR LARVAE. 4. PLANTS SHALL NOT BE PRUNED BEFORE DELIVERY. TREES WITH ABRASION OF THE BARK, SUNSCALDS, DISFIGURING KNOTS OR FRESH CUTS OF LIMBS OVER ONE AND ONE-FOURTH INCHES (1-1/4") WHICH HAVE NOT COMPLETELY CALLOUSED SHALL BE REJECTED.
- . ALL PLANTS SHALL BE TYPICAL OF THEIR SPECIES OR VARIETY AND SHALL HAVE A NORMAL HABIT OF GROWTH AND BE LEGIBLY TAGGED WITH THE PROPER NAME AND SIZE 5. THE ROOT SYSTEM OF EACH PLANT SHALL BE WELL PROVIDED WITH FIBROUS ROOTS. ALL PARTS SHALL BE SOUND, HEALTHY, VIGOROUS, WELL-BRANCHED AND DENSELY FOLIATED WHEN IN LEAF. 7. ALL PLANTS DESIGNATED BALL AND BURLAP (B&B) MUST BE MOVED WITH THE ROOT SYSTEM AS SOLID UNITS WITH BALLS OF EARTH FIRMLY WRAPPED WITH BURLAP. THE DIAMETER AND DEPTH OF THE BALLS OF EARTH MUST BE SUFFICIENT TO ENCOMPASS THE FIBROUS ROOT FEEDING SYSTEMS NECESSARY FOR THE HEALTHY DEVELOPMENT OF THE PLANT. NO PLANT SHALL BE ACCEPTED WHEN THE BALL OF EARTH SURROUNDING ITS ROOTS HAS BEEN BADLY CRACKED OR BROKEN PREPARATORY TO OR DURING THE PROCESS OF PLANTING. THE BALLS SHALL REMAIN INTACT DURING ALL OPERATIONS. ALL PLANTS HAT CANNOT BE PLANTED AT ONCE MUST BE HEELED-IN BY SETTING IN THE GROUND AND COVERING THE BALLS WITH SOIL OR MULCH AND THEN WATERING. HEMP BURLAP AND TWINE IS PREFERABLE TO TREATED. IF TREATED BURLAP IS USED, ALL TWINE IS TO BE CUT FROM AROUND THE TRUNK AND ALL BURLAP IS TO BE REMOVED. 8. PLANTS TRANSPORTED TO THE PROJECT IN OPEN VEHICLES SHALL BE COVERED WITH TARPS OR OTHER SUITABLE COVERS SECURELY FASTENED TO THE BODY OF THE VEHICLE TO PREVENT INJURY TO THE PLANTS. CLOSED VEHICLES SHALL BE ADEQUATELY VENTILATED TO PREVENT OVERHEATING OF THE PLANTS. EVIDENCE OF INADEQUATE PROTECTION FOLLOWING DIGGING, CARELESSNESS WHILE IN TRANSIT, OR IMPROPER HANDLING OR STORAGE SHALL BE CAUSE FOR REJECTION OF PLANT MATERIAL. ALL PLANTS SHALL BE KEPT MOIST, FRESH, AND PROTECTED. SUCH PROTECTION SHALL ENCOMPASS THE ENTIRE PERIOD DURING WHICH THE PLANTS ARE IN TRANSIT, BEING HANDLED, OR ARE IN TEMPORARY STORAGE.
- 9. ALL PLANT MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH THE CORRESPONDING LANDSCAPE PLAN AND PLANTING DETAILS. O. LANDSCAPE CONTRACTOR SHALL MAKE BEST EFFORT TO INSTALL PLANTINGS ON THE SAME DAY AS DELIVERY. IF PLANTS ARE NOT PLANTED IMMEDIATELY ON SITE, PROPER CARE SHALL BE TAKEN TO PLACE THE PLANTINGS IN PARTIAL SHADE WHEN POSSIBLE. THE ROOT BALL SHALL BE KEPT MOIST AT ALL TIME AND COVERED WITH MOISTENED MULCH OR AGED WOODCHIPS. PROPER IRRIGATION SHALL BE SUPPLIED SO AS TO NOT ALLOW THE ROOT BALL TO DRY OUT. PLANTINGS SHALL BE UNTIED AND PROPER SPACING SHALL BE ALLOTTED FOR AIR CIRCULATION AND TO PREVENT DISEASE, WILTING, AND LEAF LOSS. PLANTS THAT REMAIN UNPLANTED FOR A PERIOD OF TIME GREATER THAN THREE (3) DAYS SHALL BE HEALED IN WITH TOPSOIL OR MULCH AND WATERED AS REQUIRED TO PRESERVE ROOT MOISTURE. 1. NO PLANT MATERIAL SHALL BE PLANTED IN MUDDY OR FROZEN SOIL.
- 2. PLANTS WITH INJURED ROOTS OR BRANCHES SHALL BE PRUNED PRIOR TO PLANTING UTILIZING CLEAN, SHARP TOOLS. ONLY DISEASED OR INJURED PLANTS SHALL BE REMOVED. 3. IF ROCK OR OTHER UNDERGROUND OBSTRUCTION IS ENCOUNTERED, THE LANDSCAPE DESIGNER RESERVES THE RIGHT TO RELOCATE OR ENLARGE PLANTING PITS OR DELETE PLANT MATERIAL FROM THE CONTRACT 14. IF PLANTS ARE PROPOSED WITHIN SIGHT TRIANGLES, TREES SHALL BE LIMBED AND MAINTAINED TO A HEIGHT OF SEVEN FEET (7') ABOVE GRADE, AND SHRUBS, GROUND COVER, PERENNIALS, AND ANNUALS SHALL BE MAINTAINED TO A HEIGHT NOT TO EXCEED TWO FEET (2') ABOVE GRADE UNLESS OTHERWISE NOTED OR SPECIFIED BY THE GOVERNING MUNICIPALITY OR AGENCY. 15. INSTALLATION SHALL OCCUR DURING THE FOLLOWING SEASONS: PLANTS (MARCH 15 – DECEMBER 15)

	FLANTS (MARCH 13 - DEC	EWIDER 13)	
	LAWNS (MARCH 15 - JUNE	15 OR SEPTEMBER 1 - DECE	EMBER 1)
1	6. THE FOLLOWING TREES AR	E SUSCEPTIBLE TO TRANSPLA	NT SHOCK AND SHALL NOT BE PLANTED DURING THE FALL SEASON (STARTING SEPTEMBER 15):
	ABIES CONCOLOR	CORNUS VARIETIES	OSTRYA VIRGINIANA
	ACER BUERGERIANUM	CRATAEGUS VARIETIES	PINUS NIGRA
	ACER FREEMANII	CUPRESSOCYPARIS LEYLANDI	PLATANUS VARIETIES
	ACER RUBRUM	FAGUS VARIETIES	POPULUS VARIETIES
	ACER SACCHARINUM	HALESIA VARIETIES	PRUNUS VARIETIES
	BETULA VARIETIES	ILEX X FOSTERII	PYRUS VARIETIES
	CARPINUS VARIETIES	ILEX NELLIE STEVENS	QUERCUS VARIETIES (NOT Q. PALUSTRIS)
	CEDRUS DEODARA	ILEX OPACA	SALIX WEEPING VARIETIES
	CELTIS VARIETIES	JUNIPERUS VIRGINIANA	SORBUS VARIETIES
	CERCIDIPHYLLUM VARIETIES	KOELREUTERIA PANICULATA	TAXODIUM VARIETIES
	CERCIS CANADENSIS	LIQUIDAMBAR VARIETIES	TAXUX B REPANDENS
	CORNUS VARIETIES	LIRIODENDRON VARIETIES	TILIA TOMENTOSA VARIETIES
	CRATAEGUS VARIETIES	MALUS IN LEAF	ULMUS PARVIFOLIA VARIETIES

REVISED 2/18/2015

- NYSSA SYLVATICA ZELKOVA VARIETIES 17. IF A PROPOSED PLANT IS UNATTAINABLE OR ON THE FALL DIGGING HAZARD LIST, AN EQUIVALENT SPECIES OF THE SAME SIZE MAY BE REQUESTED FOR SUBSTITUTION OF THE ORIGINAL PLANT. ALL SUBSTITUTIONS SHALL BE APPROVED BY THE PROJECT LANDSCAPE DESIGNER OR MUNICIPAL OFFICIAL PRIOR TO ORDERING AND INSTALLATION. 18. DURING THE COURSE OF CONSTRUCTION/PLANT INSTALLATION, EXCESS AND WASTE MATERIALS SHALL BE CONTINUOUSLY AND PROMPTLY REMOVED AT THE END OF EACH WORK DAY. ALL DEBRIS, MATERIALS, AND TOOLS SHALL BE PROPERLY STORED, STOCKPILED OR DISPOSED OF AND ALL PAVED AREAS SHALL BE CLEANED. 19. THE LANDSCAPE CONTRACTOR SHALL DISPOSE OF ALL RUBBISH AND EXCESS SOIL AT HIS EXPENSE TO AN OFF-SITE LOCATION AS APPROVED BY THE LOCAL MUNICIPALITY.
- 20. A 90-DAY MAINTENANCE PERIOD SHALL BEGIN IMMEDIATELY AFTER ALL PLANTS HAVE BEEN SATISFACTORILY INSTALLED. 1. MAINTENANCE SHALL INCLUDE, BUT NOT BE LIMITED TO, REPLACING MULCH THAT HAS BEEN DISPLACED BY EROSION OR OTHER MEANS, REPAIRING AND RESHAPING WATER RINGS OR SAUCERS, MAINTAINING STAKES AND GUYS IF ORIGINALLY REQUIRED, WATERING WHEN NEEDED OR DIRECTED, WEEDING, PRUNING, SPRAYING, FERTILIZING, MOWING THE LAWN, AND PERFORMING ANY OTHER WORK REQUIRED TO KEEP THE PLANTS IN A HEALTHY CONDITION. 22. MOW ALL GRASS AREAS AT REGULAR INTERVALS TO KEEP THE GRASS HEIGHT FROM EXCEEDING THREE INCHES (3"). MOWING SHALL BE PERFORMED ONLY WHEN GRASS IS DRY. MOWER BLADE SHALL BE SET TO REMOVE NO MORE THAN ONE THIRD (1/3) OF THE GRASS LENGTH. WHEN THE AMOUNT OF GRASS IS HEAVY, IT SHALL BE REMOVED TO PREVENT DESTRUCTION OF THE UNDERLYING TURF. MOW GRASS
- AREAS IN SUCH A MANNER AS TO PREVENT CLIPPINGS FROM BLOWING ON PAVED AREAS, AND SIDEWALKS. CLEANUP AFTER MOWING SHALL INCLUDE SWEEPING OR BLOWING OF PAVED AREAS AND SIDEWALKS TO CLEAR THEM FROM MOWING DEBRIS. 23. GRASSED AREAS DAMAGED DURING THE PROCESS OF THE WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, WHO SHALL RESTORE THE DISTURBED AREAS TO A CONDITION SATISFACTORY TO THE PROJECT LANDSCAPE DESIGNER, MUNICIPAL OFFICIAL, OR OWNER/OWNER'S REPRESENTATIVE. THIS MAY INCLUDE FILLING TO GRADE, FERTILIZING, SEEDING, AND MULCHING. 24. SHOULD THE OWNER REQUIRE MAINTENANCE BEYOND THE STANDARD 90-DAY MAINTENANCE PERIOD, A SEPARATE CONTRACT SHALL BE ESTABLISHED. 25. LANDSCAPE CONTRACTOR SHALL WATER NEW PLANTINGS FROM TIME OF INSTALL AND THROUGHOUT REQUIRED 90-DAY MAINTENANCE PERIOD UNTIL PLANTS ARE ESTABLISHED. IF ON-SITE WATER IS NOT AVAILABLE AT THE PROJECT LOCATION, THE LANDSCAPE CONTRACTOR SHALL FURNISH IT BY MEANS OR A WATERING TRUCK OR OTHER ACCEPTABLE MANNER. 26. THE QUANTITY OF WATER APPLIED AT ONE TIME SHALL BE SUFFICIENT TO PENETRATE THE SOIL TO A MINIMUM OF EIGHT INCHES (8") IN SHRUB BEDS AND SIX INCHES (6") IN TURF AREAS AT A RATE WHICH
- WILL PREVENT SATURATION OF THE SOIL 27. IF AN AUTOMATIC IRRIGATION SYSTEM HAS BEEN INSTALLED, IT CAN BE USED FOR WATERING PLANT MATERIAL. HOWEVER, FAILURE OF THE SYSTEM DOES NOT ELIMINATE THE LANDSCAPE CONTRACTOR'S RESPONSIBILITY OF PLANT HEALTH AND ESTABLISHMENT. LAWN (SEED OR SOD) NOTES:
- SEED MIXTURE SHALL BE FRESH, CLEAN, NEW CROP SEED. SOD SHALL BE STRONGLY ROOTED, UNIFORM IN THICKNESS, AND FREE OF WEEDS, DISEASE, AND PESTS SEED OR SOD SHALL BE PURCHASED FROM A RECOGNIZED DISTRIBUTOR AND SHALL BE COMPOSED OF THE MIX OR BLEND WITHIN THE PROVIDED "SEED SPECIFICATION" OR "SOD SPECIFICATION." RFFFRENCE LANDSCAPE PLAN FOR AREAS TO BE SEEDED OR LAID WITH SOD. . SEEDING SHALL NOT BE PERFORMED IN WINDY WEATHER. IF THE SEASON OF THE PROJECT COMPLETION PROHIBITS PERMANENT STABILIZATION, TEMPORARY STABILIZATION SHALL BE PROVIDED IN ACCORDANCE WITH THE "TEMPORARY SEEDING SPECIFICATION." 5. PROTECT NEW LAWN AREAS AGAINST TRESPASSING WHILE THE SEED IS GERMINATING. FURNISH AND INSTALL FENCES, SIGNS, BARRIERS OR ANY OTHER NECESSARY TEMPORARY PROTECTIVE DEVICES. DAMAGE RESULTING FROM TRESPASS, EROSION, WASHOUT, SETTLEMENT OR OTHER CAUSES SHALL BE REPAIRED BY THE LANDSCAPE CONTRACTOR AT HIS EXPENSE. REMOVE ALL FENCES, SIGNS, BARRIERS OR OTHER TEMPORARY PROTECTIVE DEVICES ONCE LAWN HAS BEEN ESTABLISHED.
- 1. THE LANDSCAPE CONTRACTOR SHALL FURNISH ALL MATERIALS AND PERFORM ALL WORK IN ACCORDANCE WITH THESE SPECIFICATIONS, APPROVED OR FINAL DRAWINGS, AND INSTRUCTIONS PROVIDED BY THE PROJECT LANDSCAPE DESIGNER, MUNICIPAL OFFICIALS, OR OWNER/OWNER'S REPRESENTATIVE. ALL WORK COMPLETED AND MATERIALS FURNISHED AND INSTALLED SHALL BE IN STRICT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCT ACCORDANCE WITH THE INTENTION OF THE SECIFICATIONS, AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCTIONS AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCTIONS AND INSTRUCTIONS AND EXECUTED WITH THE INSTRUCTIONS AND INSTRUCTIN IT IS THE RESPONSIBILITY OF THE LANDSCAPE CONTRACTOR, BEFORE ORDERING OR PURCHASING MATERIALS, TO PROVIDE SAMPLES OF THOSE MATERIALS TO THE PROJECT LANDSCAPE DESIGNER OR GOVERNING MUNICIPAL OFFICIAL FOR APPROVAL, IF SO REQUESTED. 5. UNLESS OTHERWISE AUTHORIZED BY THE PROJECT LANDSCAPE DESIGNER OR GOVERNING MUNICIPAL OFFICIAL, THE LANDSCAPE CONTRACTOR SHALL PROVIDE NOTICE AT LEAST FORTY-EIGHT HOURS (48 HRS.) IN ADVANCE OF THE ANTICIPATED DELIVERY DATE OF ANY PLANT MATERIALS TO THE PROJECT SITE. A LEGIBLE COPY OF THE INVOICE, SHOWING VARIETIES AND SIZES OF MATERIALS INCLUDED FOR EACH SHIPMENT SHALL BE FURNISHED TO THE PROJECT LANDSCAPE DESIGNER, OR GOVERNING MUNICIPAL OFFICIAL. 6. THE PROJECT LANDSCAPE DESIGNER OR GOVERNING MUNICIPAL OFFICIAL RESERVES THE RIGHT TO INSPECT AND REJECT PLANTS AT ANY PLACE.
- 1. LANDSCAPE CONTRACTOR SHALL OBTAIN A SOIL TEST OF THE IN-SITU TOPSOIL BY A CERTIFIED SOIL LABORATORY PRIOR TO PLANTING. LANDSCAPE CONTRACTOR SHALL ALLOW FOR A TWO WEEK TURNAROUND TIME FROM SUBMITTAL OF SAMPLE TO NOTIFICATION OF RESULTS. 2. BASED ON SOIL TEST RESULTS, ADJUST THE RATES OF LIME AND FERTILIZER THAT SHALL BE MIXED INTO THE TOP SIX INCHES (6") OF TOPSOIL. THE LIME AND FERTILIZER THAT SHALL BE MIXED INTO THE TOP SIX INCHES (6") OF TOPSOIL. THE LIME AND FERTILIZER THAT SHALL BE MIXED INTO THE TOP SIX INCHES (6") OF TOPSOIL.
- 3. TOPSOIL SHALL BE FERTILE, FRIABLE, NATURAL TOPSOIL OF LOAMING CHARACTER, WITHOUT ADMIXTURE OF SUBSOIL MATERIAL OBTAINED ARABLE SITE, FREE FROM ALL CLAY, LUMPS, COARSE SANDS, STONES, PLANTS, ROOTS, STICKS, AND OTHER FOREIGN MATERIAL GREATER THAN ONE INCH (1). 6. CONTRACTOR SHALL PROVIDE A SIX INCH (6") DEEP LAYER OF TOPSOIL IN ALL PLANTING AREAS. TOPSOIL SHALL BE SPREAD OVER A PREPARED SURFACE IN A UNIFORM LAYER TO ACHIEVE THE DESIRED COMPACTED THICKNESS. THE SPREADING OF TOPSOIL SHALL NOT BE CONDUCTED UNDER MUDDY OR FROZEN SOIL CONDITIONS. UNLESS OTHERWISE NOTED IN THE CONTRACT, THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF TOPSOIL AND THE ESTABLISHMENT OF FINE-GRADING WITHIN THE DISTURBED AREA OF THE SITE.
- 8. LANDSCAPE CONTRACTOR SHALL VERIFY THAT THE SUB-GRADE ELEVATION MEETS THE FINISHED GRADE ELEVATION (LESS THE REQUIRED TOPSOIL), IN ACCORDANCE WITH THE APPROVED OR FINAL GRADING PLAN. ALL LAWN AND PLANTING AREAS SHALL BE GRADED TO A SMOOTH, EVEN AND UNIFORM PLANE WITH NO ABRUPT CHANGE OF SURFACE AS DEPICTED WITHIN THE APPROVED OR FINAL CONSTRUCTION SET UNLESS OTHERWISE DIRECTED BY THE PROJECT LANDSCAPE DESIGNER OR MUNICIPAL OFFICIAL 0. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROPER SURFACE AND SUBSURFACE PLANT BED DRAINAGE PRIOR TO THE INSTALLATION OF PLANTINGS. IF POOR DRAINAGE CONDITIONS EXIST, CORRECTIVE ACTION SHALL BE TAKEN PRIOR TO INSTALLATION. ALL PLANTING AND LAWN AREAS SHALL BE GRADED AND MAINTAINED TO 11. DOUBLE SHREDDED HARDWOOD MULCH OR APPROVED EQUAL SHALL BE USED AS A THREE INCH (3") TOP DRESSING IN ALL SHRUB PLANTING BEDS AND AROUND ALL TREES PLANTED BY LANDSCAPE CONTRACTOR. GROUND COVER, PERENNIAL, AND ANNUAL PLANTING BEDS SHALL BE MULCHED WITH A TWO INCH (2) TOP DRESSING. SINGLE TREES OR SHRUBS SHALL BE MULCHED TO AVOID CONTACT WITH TRUNK OR PLANT STEM. MULCH SHALL BE OF SUFFICIENT CHARACTER AS NOT TO BE EASILY DISPLACED BY WIND OR WATER RUNOFF. . SOIL SHALL BE LOOSENED WITH A BACKHOE OR OTHER LARGE COARSE-TILING EQUIPMENT UNLESS THE SOIL IS FROZEN OR EXCESSIVELY WET. TILING THAT RESULTS IN FINE GRAINS UNIFORM IN TEXTURE. AFTER THE AREA IS LOOSENED IT SHALL NOT
- MYCRO -- TREE SAVER A DRY GRANULAR MYCORRHIZAL FUNGI INOCULANT THAT IS MIXED IN THE BACKFILL WHEN PLANTING TREES AND SHRUBS. IT CONTAINS SPORES OF BOTH ECTOMYCORRHIZAL FUNGI (VAM), BENEFICIAL RHIZOSPHERE BACTERIA, TERRA-SORB SUPERABSORBENT HYDROGEL TO REDUCE WATER LEACHING, AND SELECTED ORGANIC MICROBIAL NUTRIENTS. • DIRECTIONS FOR USE: USE 3-OZ PER EACH FOOT DIAMETER OF THE ROOT BALL, OR 3-OZ PER INCH CALIPER. MIX INTO THE BACKFILL WHEN TRANSPLANTING TREES AND SHRUBS. MIX PRODUCT IN A RING-SHAPED VOLUME OF SOIL AROUND THE UPPER PORTION OF THE ROOT BALL, EXTENDING FROM THE SOIL SURFACE TO A
- FUNGICIDES: THE USE OF CERTAIN FUNGICIDES CAN HAVE A DETRIMENTAL EFFECT ON THE INOCULATION PROGRAM. SOIL APPLICATION OF ANY FUNGICIDE IS NOT RECOMMENDED FOR TWO WEEKS AFTER APPLICATION. • OTHER PESTICIDES: HERBICIDES AND INSECTICIDES DO NOT NORMALLY INTERFERE WITH MYCORRHIZAL FUNGAL DEVELOPMENT, BUT MAY INHIBIT THE GROWTH OF SOME TREE AND SHRUB SPECIES IF NOT USED PROPERLY.
- TABLETS ARE FORMULATED FOR LONG-TERM RELEASE BY SLOW BIODEGRADATION, AND LAST UP TO 2 YEARS AFTER PLANTING. TABLETS CONTAIN 12-8-8 NPK FERTILIZER, AS WELL AS A MINIMUM OF SEVEN PERCENT (7%) HUMIC ACID BY WEIGHT, MICROBIAL NUTRIENTS DERIVED FROM SEA KELP, PROTEIN BYPRODUCTS, AND YUCCA SCHIDIGERA, AND A COMPLEMENT OF BENEFICIAL RHIZOSPHERE BACTERIA. THE STANDARD 21 GRAM TABLET IS SPECIFIED HERE. DIRECTIONS FOR USE: FOR PLANTING BALLED & BURLAPPED (B&B) TREES AND SHRUBS, MEASURE THE THICKNESS OF THE TRUNK, AND USE ABOUT 1 TABLET (21-G) PER HALF-INCH. PLACE
- 1. THE LANDSCAPE CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIAL FOR A PERIOD OF ONE YEAR (1 YR.) FROM APPROVAL OF LANDSCAPE DESIGNER, MUNICIPAL OFFICIAL, OR OWNER/OWNER'S REPRESENTATIVE. LANDSCAPE CONTRACTOR SHALL SUPPLY THE OWNER WITH A MAINTENANCE BOND IN THE AMOUNT OF 10% OF THE VALUE OF THE LANDSCAPE INSTALLATION WHICH WILL BE RELEASED AT THE CONCLUSION OF THE GUARANTEE PERIOD AND ONCE FINAL ACCEPTANCE HAS BEEN GRANTED BY THE PROJECT LANDSCAPE DESIGNER, MUNICIPAL OFFICIAL, OR OWNER/OWNER'S REPRESENTATIVE. 2. THE LANDSCAPE CONTRACTOR SHALL REMOVE AND REPLACE DYING, DEAD, OR DEFECTIVE PLANT MATERIAL AT HIS EXPENSE. THE LANDSCAPE CONTRACTOR SHALL ALSO BE RESPONSIBLE FOR ANY DAMAGES CAUSED BY HIS COMPANY'S OPERATIONS. 3. ALL REPLACEMENT PLANTS SHALL BE OF THE SAME SPECIES AND SIZE AS SPECIFIED ON THE APPROVED OR FINAL PLANT LIST. REPLACEMENTS RESULTING FROM REMOVAL, LOSS, OR DAMAGE DUE TO OCCUPANCY OF THE PROJECT IN ANY PART, VANDALISM, PHYSICAL DAMAGE BY ANIMALS, VEHICLES, ETC., AND LOSSES DUE TO


SCALE 0 20 40 BY DATE DESCRIPTION REVISION 6. MM 8/7/23 SITE RE-DESIGN MM 2/6/23 PH CONSULTANT COMME 5. MM 1/17/23 PUBLIC HEARING COMM MM 3/21/22 DEC EMAIL DATED 03/ 3. MM | 12/2/21 | PER PB MTG & AF CC MM 9/16/21 PREPARATION OF PREL TOWN OF CHESTER PLANNING BOARD APPROVAL THIS SHEET IS NOT VALID WITHOUT AI ARDEN CONSULTIN P.O. BOX 340 T: 845-782-8114 E: M SITE PLAN & DAVIDSON LA TOWN OF CHEST

ICHAEL A. MORGANTE, P.


LIC. NO. 78577

COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. - ALL RIGHTS RESERVED


DESIGN	
ULTANT COMMENTS	
HEARING COMMENTS	
AIL DATED 03/11/22	
MTG & AF COMMENT LETTER	
TION OF PRELIMINARY PLANS	
THOUT ALL OF THE SHEETS THAT COMPRISE	E THE SET
ULTING ENGINEERS, PL	LC
DX 340 MONROE, N.Y.	
4 E: MAM@ARDENCONSULTING.NET	
PLAN & LOT LINE COMBINATION FOR	J0B#: 20-030
DSON DRIVE HOLDINGS, LLC	SCALE:
LAKE STATION ROAD	AS NOTED
OF CHESTER, COUNTY OF ORANGE, NY	03-21-22
	DRAWN:
	MM CHECKED:
LANDSCAPING DETAILS	ММ
	SHEET NO. 14 OF 22

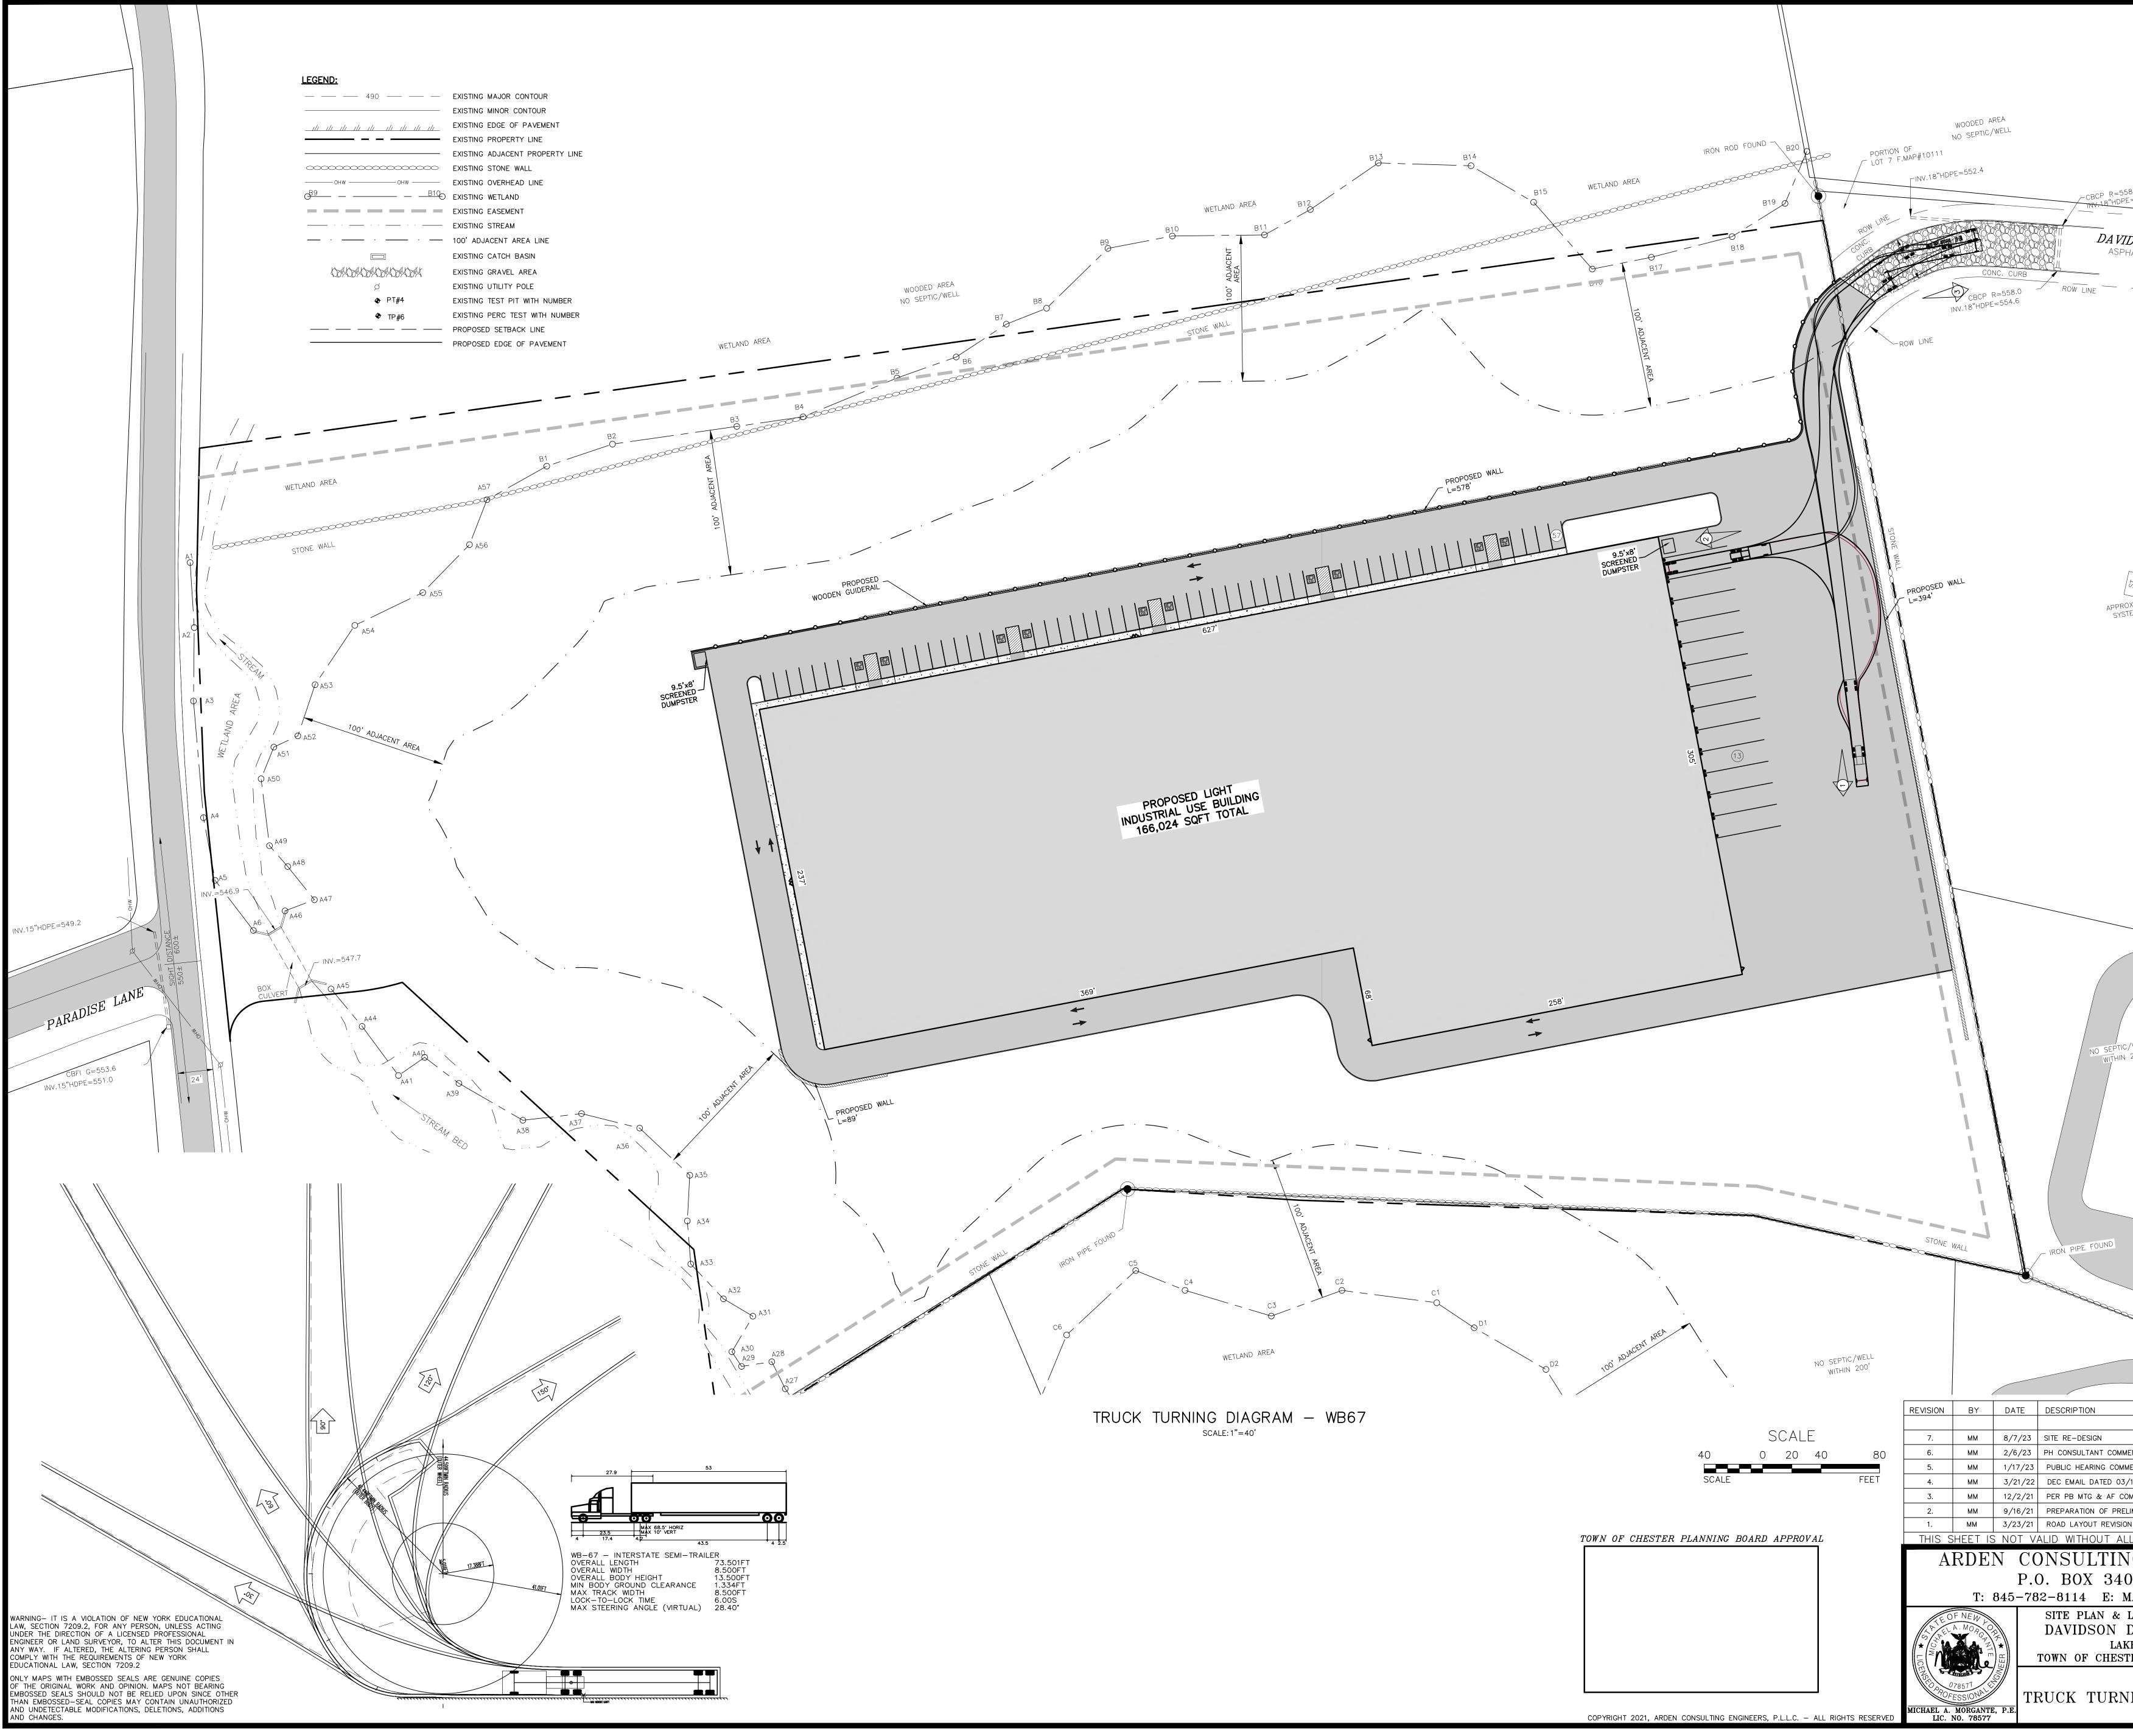


NAD83
58.0
E=553.7
DSON DRIVE
HALT ROAD
OXIMATE SEPTIC OXIMATE SEPTIC ITEM LOCATION
C/WELL
2 ₂₀₀ ,
/ENTS
MENTS
OMMENT LETTER
CLIMINARY PLANS
IL OF THE SHEETS THAT COMPRISE THE SET
0 MONROE, N.Y.
MAM@ARDENCONSULTING.NET
DRIVE HOLDINGS, LLC
KE STATION ROADAS NOTED DATE: 03-21-22TER, COUNTY OF ORANGE, NY03-21-22 DRAWN:
NING DIAGRAM – WB67
NING DIAGRAM – WB67 $_{MM}$
SHEET NO. 15 OF 22

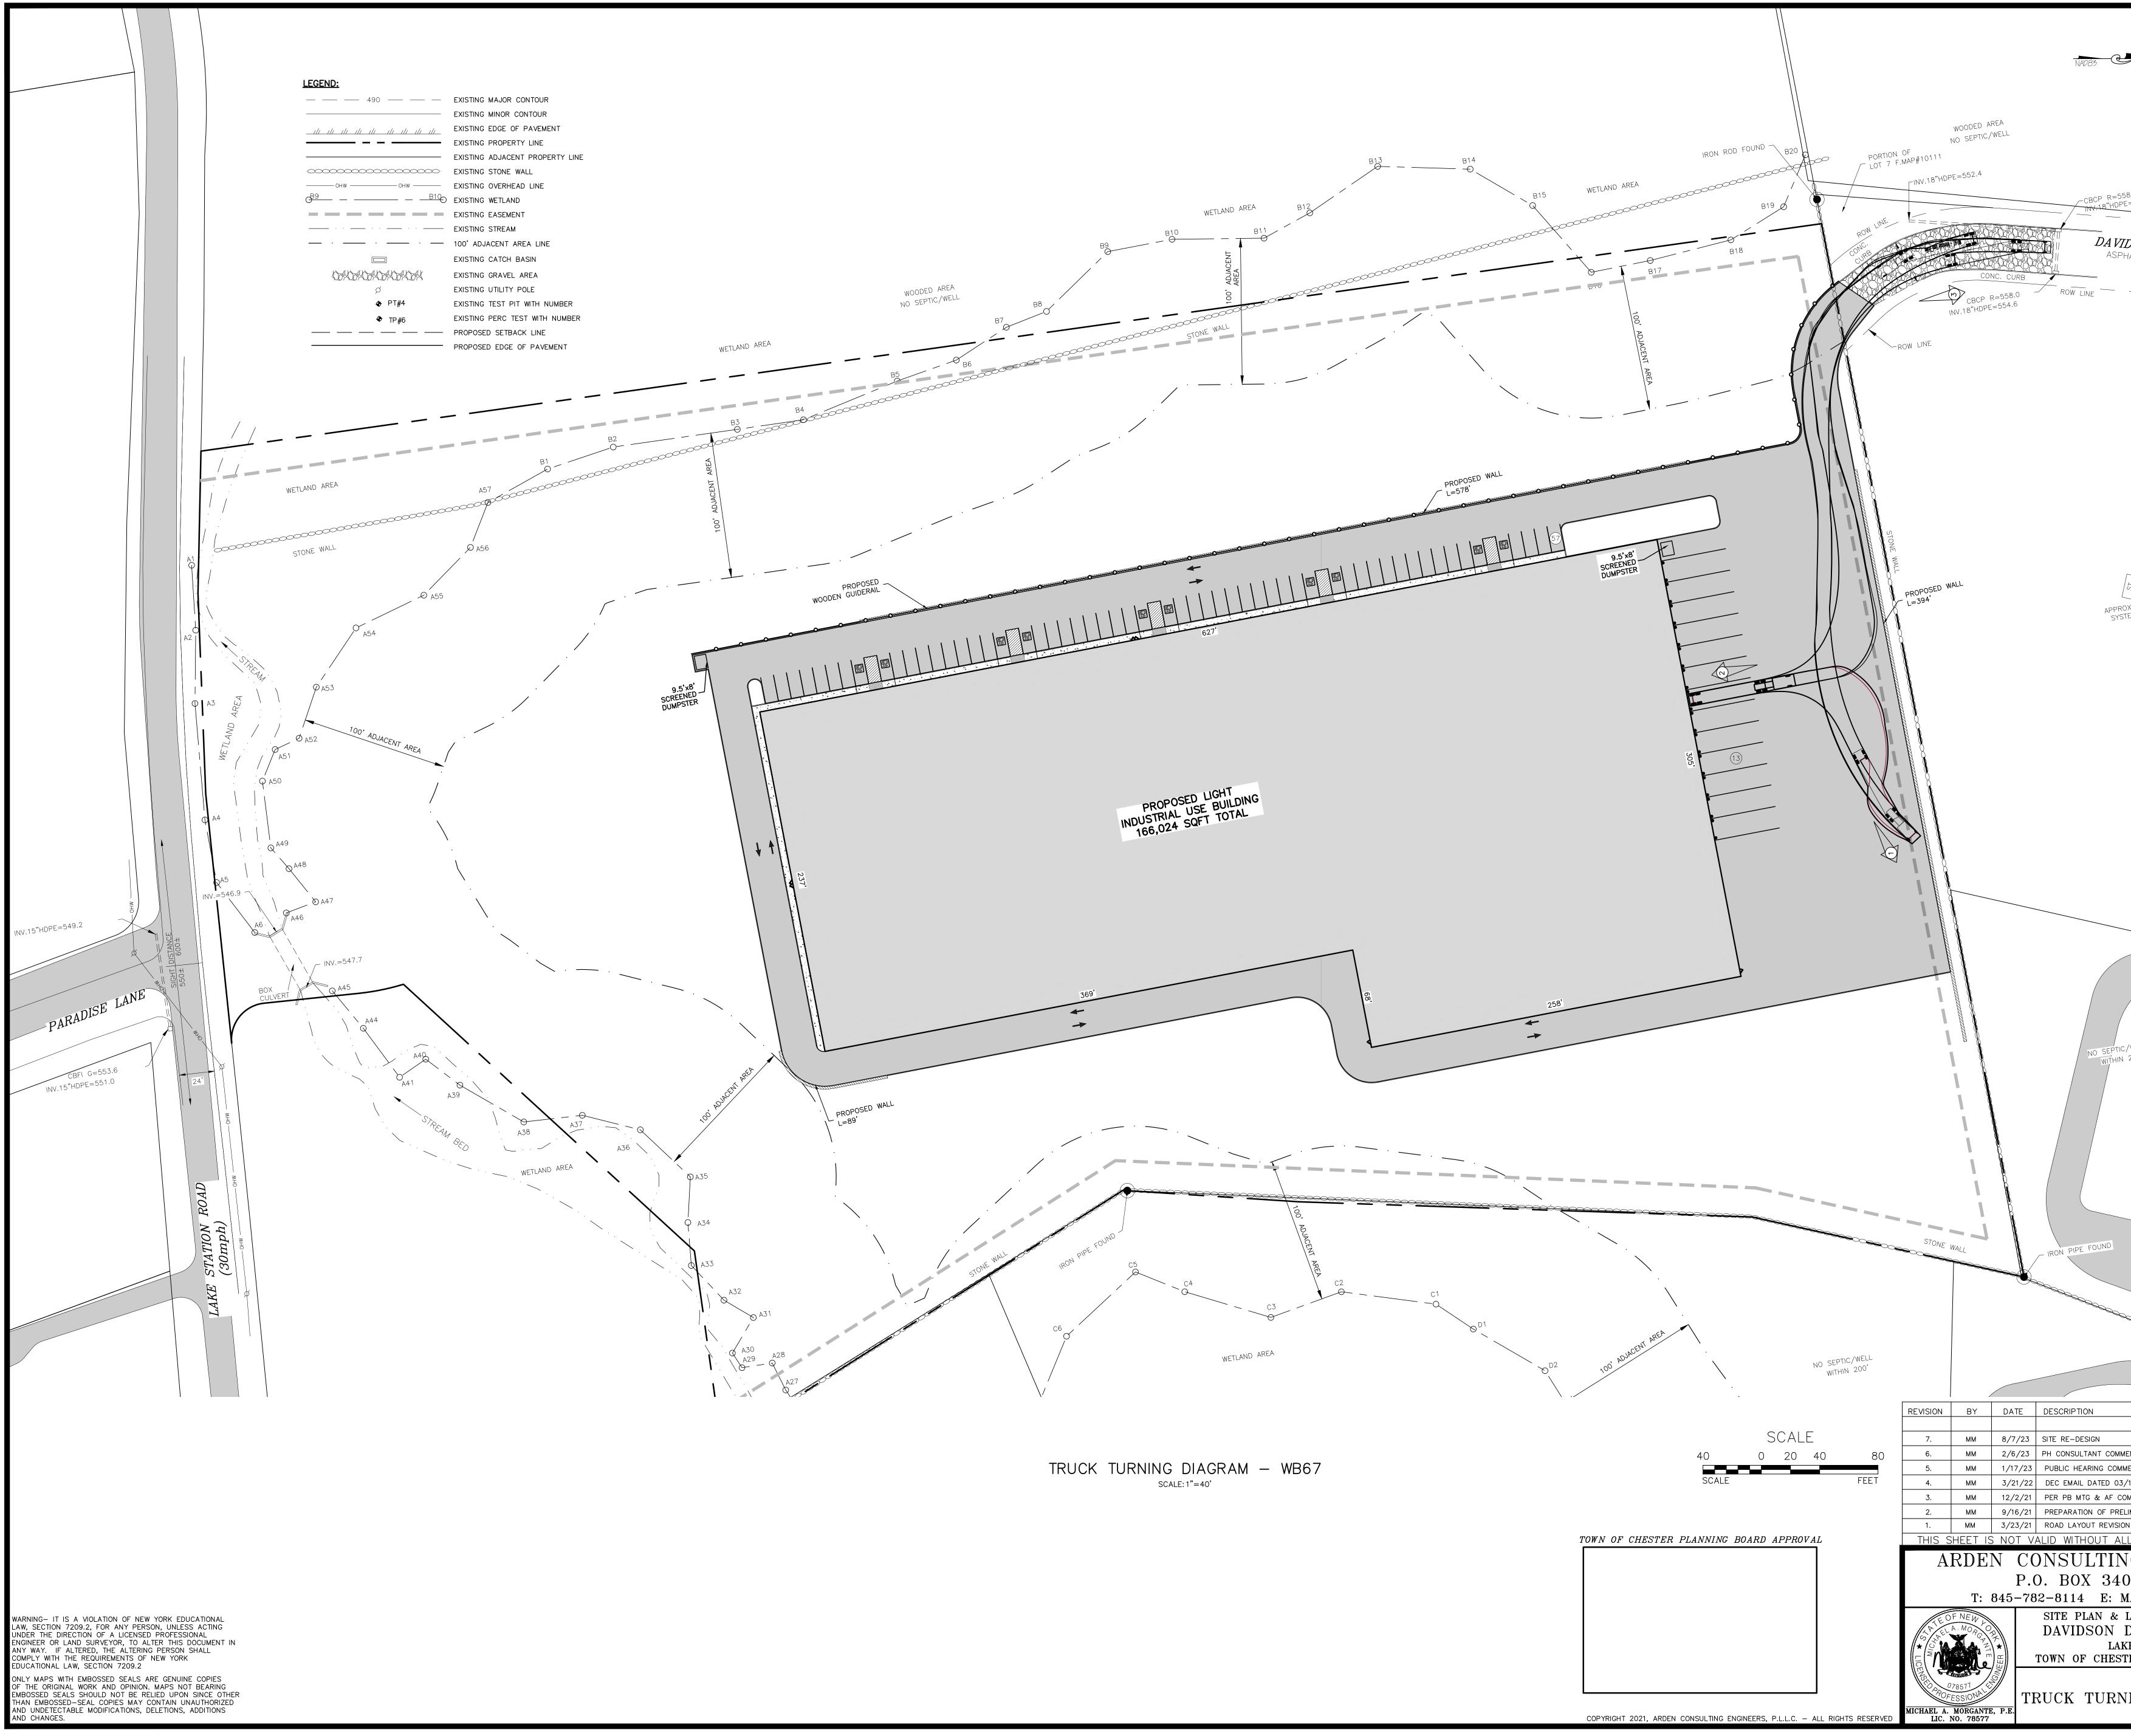


°
58.0
E=553.7
DSON DRIVE
HALT ROAD
OXIMATE SEPTIC
OXIMATE SET T
2/WELL 200'
IENTS
MENTS //11/22
OMMENT LETTER
LIMINARY PLANS DN PER PB MTG.
IL OF THE SHEETS THAT COMPRISE THE SET
O MONROE, N.Y.
MAM@ARDENCONSULTING.NET
DRIVE HOLDINGS, LLC
KE STATION ROAD AS NOTED
DRAWN:
NING DIAGRAM – WB67
16 OF 22

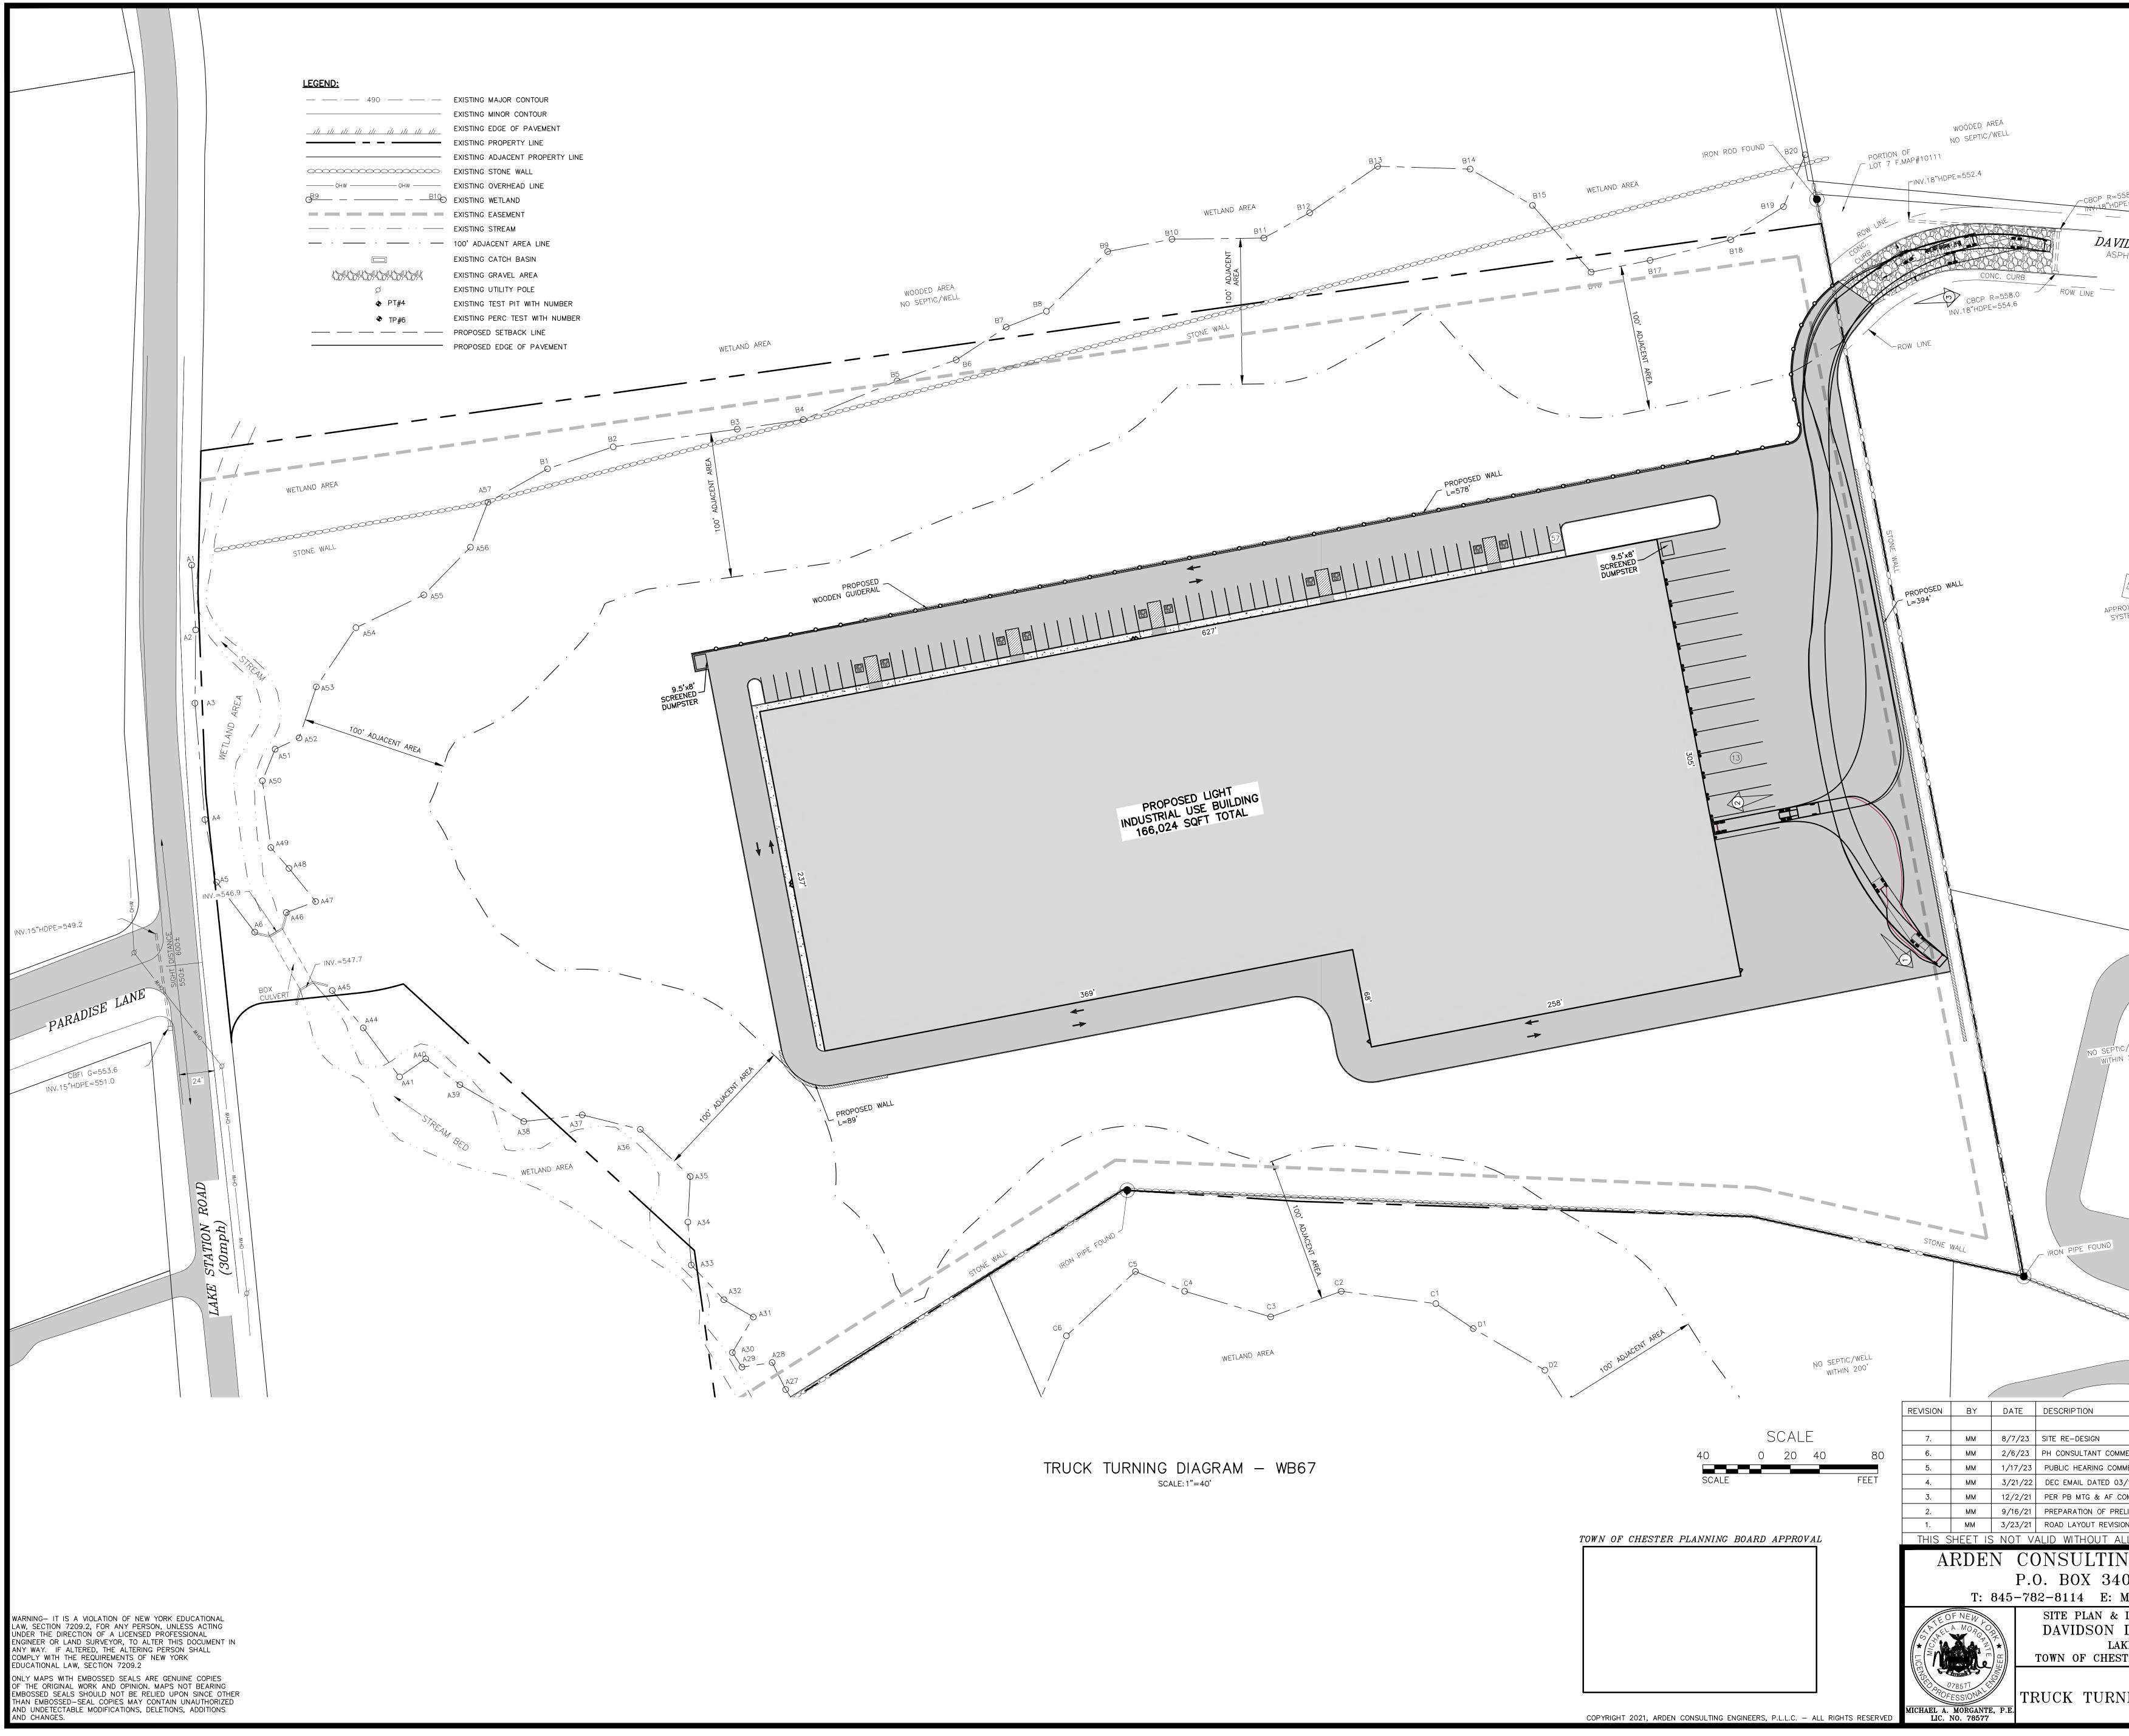


NAD 83	
58.0	
58.0 E=553.7	
IDSON DRIVE 'Halt road	
SEPTIC	
OXIMATE SLID TEM LOCATION	
C/WELL	
C/WELL 200'	
C/WELL 200'	
C/WELL 200'	
C/WELL 200	
C/WELL 200'	
C/WELL 200	
C/WELL 200'	
C/WELL 200'	
C/WELL 200	
C/WELL 200	
C/WELL 200	
C/WELL 200	
C/WELL 200'	
Z/WELL 200'	
1 200 [°]	
A 200'	
MENTS MENTS MENTS MENTS MINTS MENTS MINTS MENTS	
A 200'	
MENTS MENTS MENTS MINTS MENTS MINTARY PLANS DN PER PB MTG. LL OF THE SHEETS THAT COMPRISE NG ENGINEERS, PL	
A 200'	
A 200'	JOB#:
A 200'	JOB#: 20-030 SCALE:
A 200'	JOB#: 20-030 SCALE: AS_NOTED DATE:
A 200'	JOB#: 20-030 SCALE: AS_NOTED DATE: 03-21-22 DRAWN:
A 200'	JOB#: 20-030 SCALE: AS_NOTED DATE: 03-21-22 DRAWN:

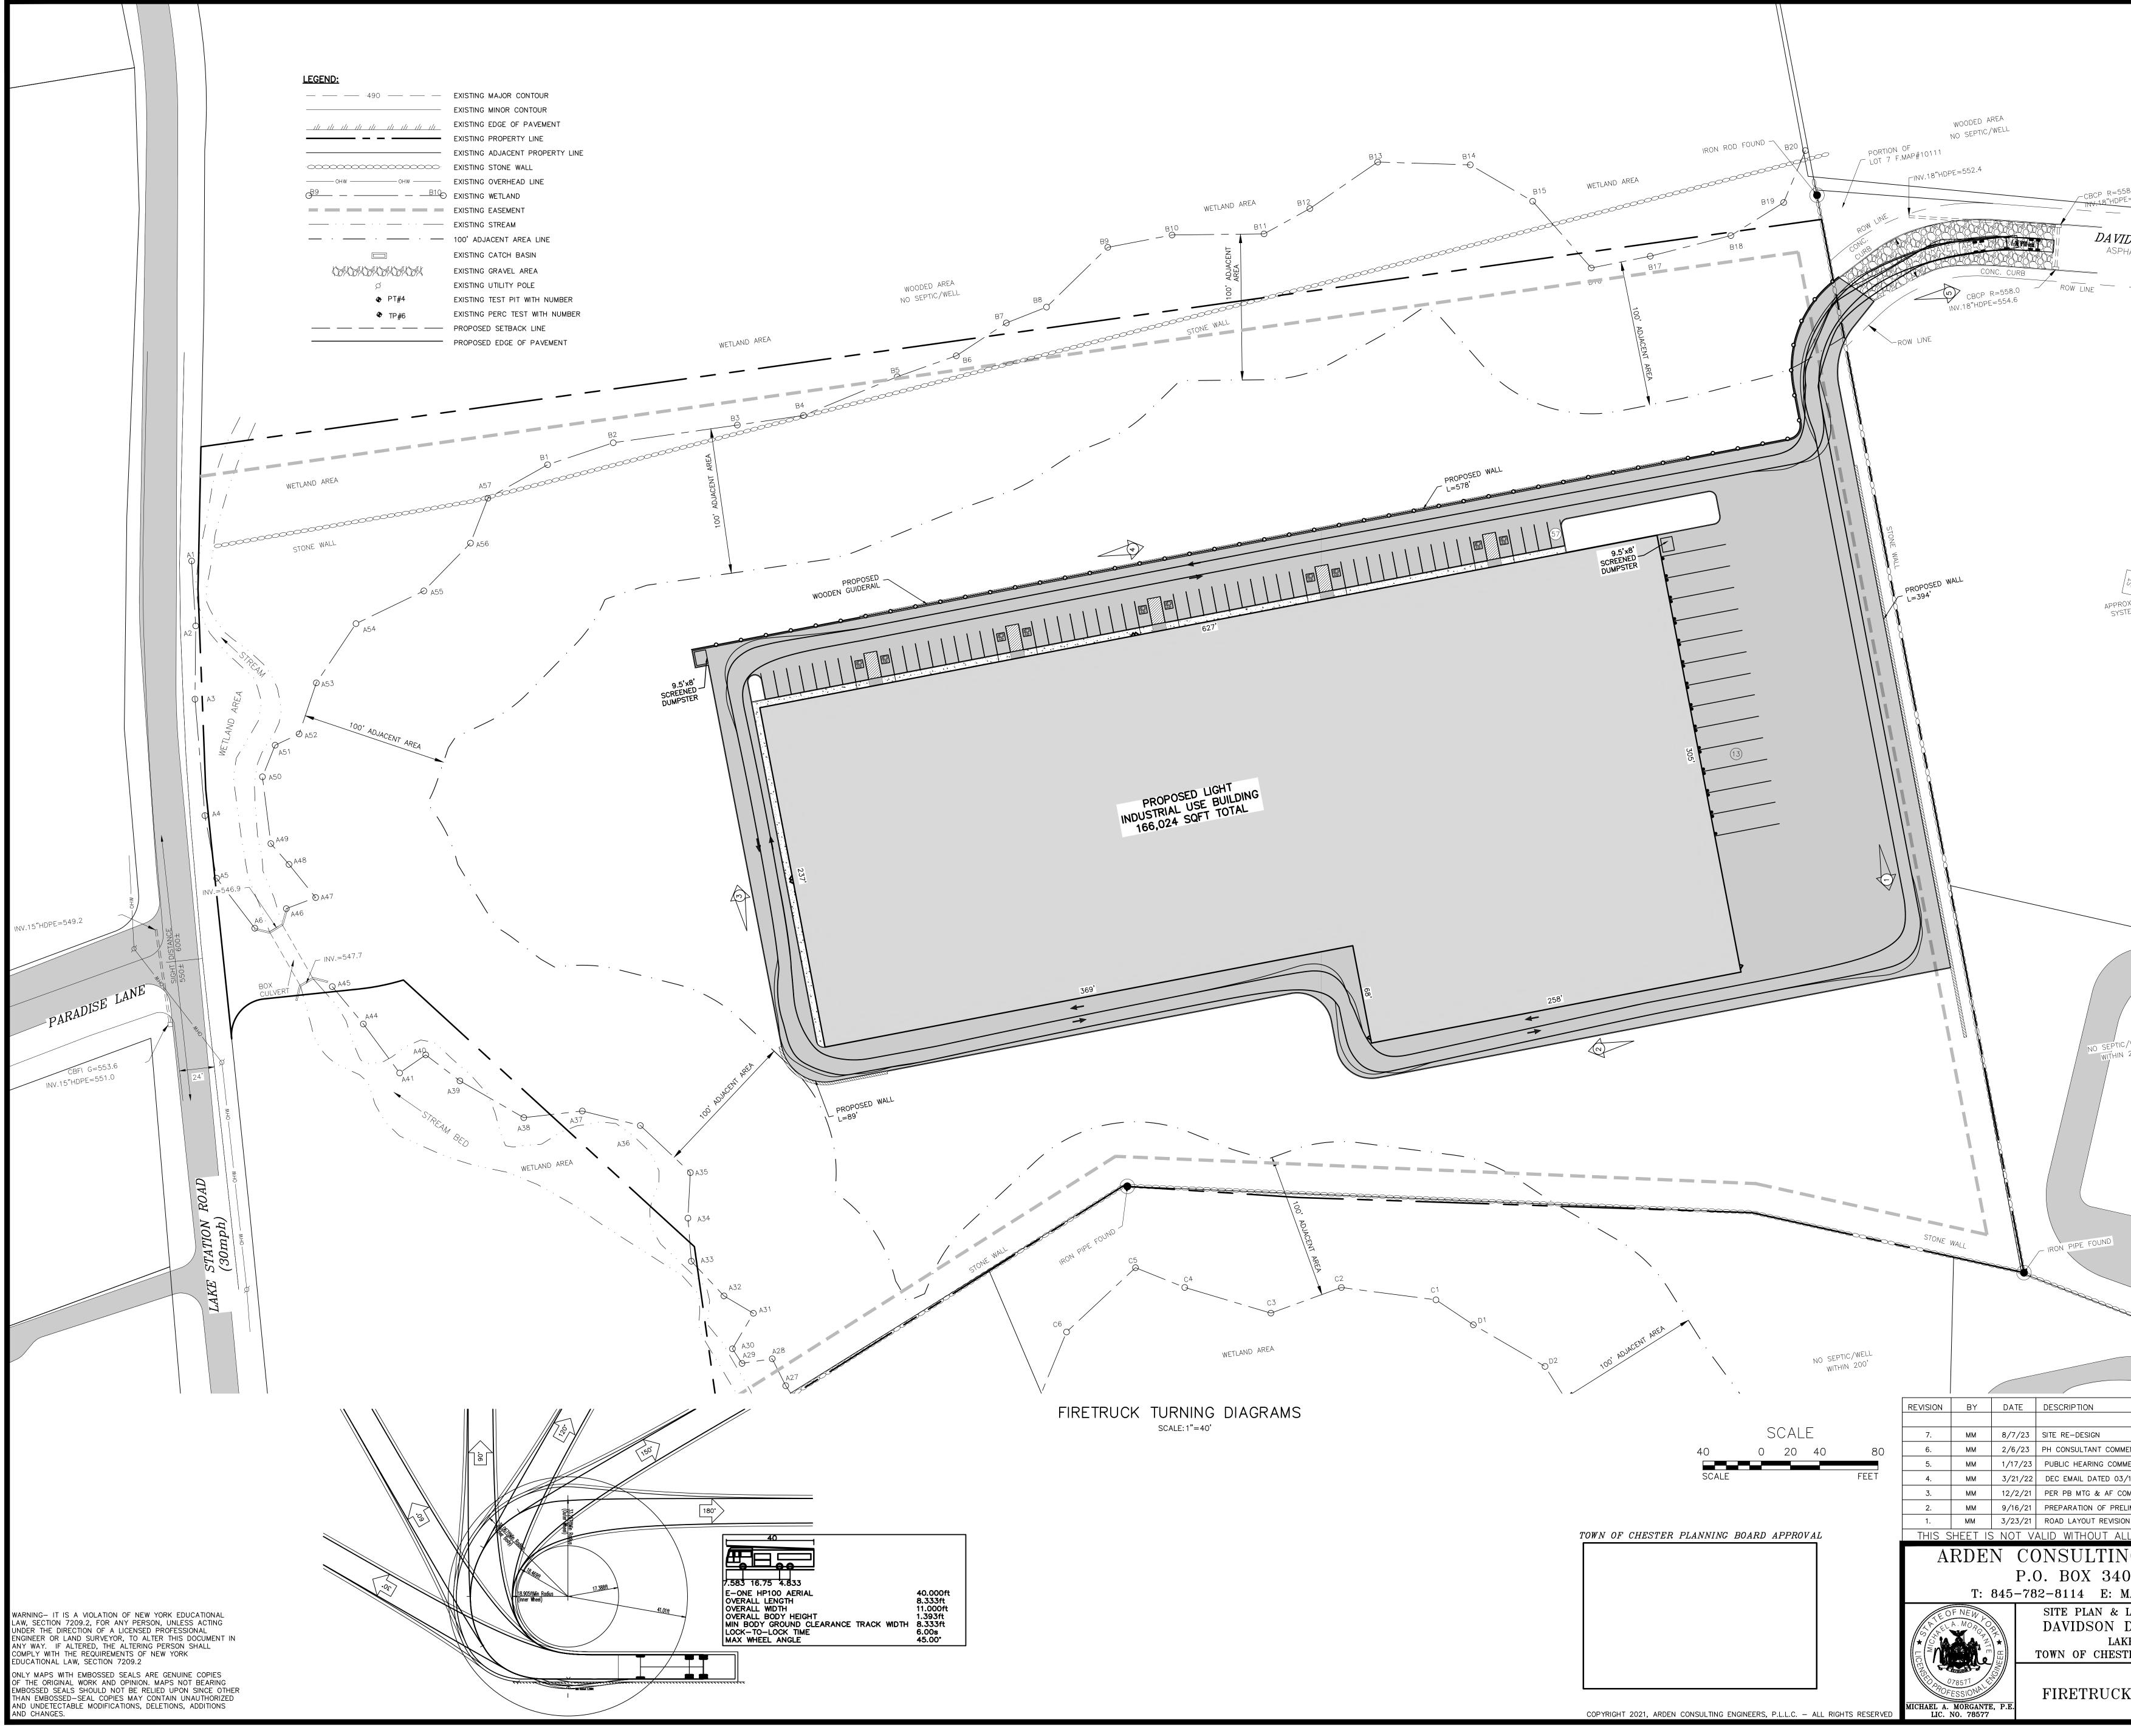

NAD83	
58.0 E=553.7	
IDSON DRIVE Phalt road	
TALI KUAD	
ST	
OXIMATE SEPTIC TEM LOCATION	
C/WELL	
1 ₂₀₀ '	
	\sim
MENTS	
MENTS	
MENTS 5/11/22 OMMENT LETTER	
MENTS 3/11/22	
MENTS 3/11/22 OMMENT LETTER ELIMINARY PLANS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE	
MENTS 3/11/22 OMMENT LETTER ELIMINARY PLANS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE NG ENGINEERS, PL	
MENTS 3/11/22 OMMENT LETTER ELIMINARY PLANS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE	LC
MENTS 3/11/22 OMMENT LETTER ELIMINARY PLANS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR	лов#:
MENTS 3/11/22 OMMENT LETTER ELIMINARY PLANS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC KE STATION ROAD	JOB#: 20-030 SCALE: AS_NOTED DATE:
MENTS 3/11/22 OMMENT LETTER ELIMINARY PLANS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC	JOB#: 20-030 SCALE: AS NOTED DATE: 03-21-22 DRAWN:
MENTS 3/11/22 OMMENT LETTER ELIMINARY PLANS ON PER PB MTG. LL OF THE SHEETS THAT COMPRISE NG ENGINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET LOT LINE COMBINATION FOR DRIVE HOLDINGS, LLC KE STATION ROAD	JOB#: 20-030 SCALE: AS_NOTED DATE:

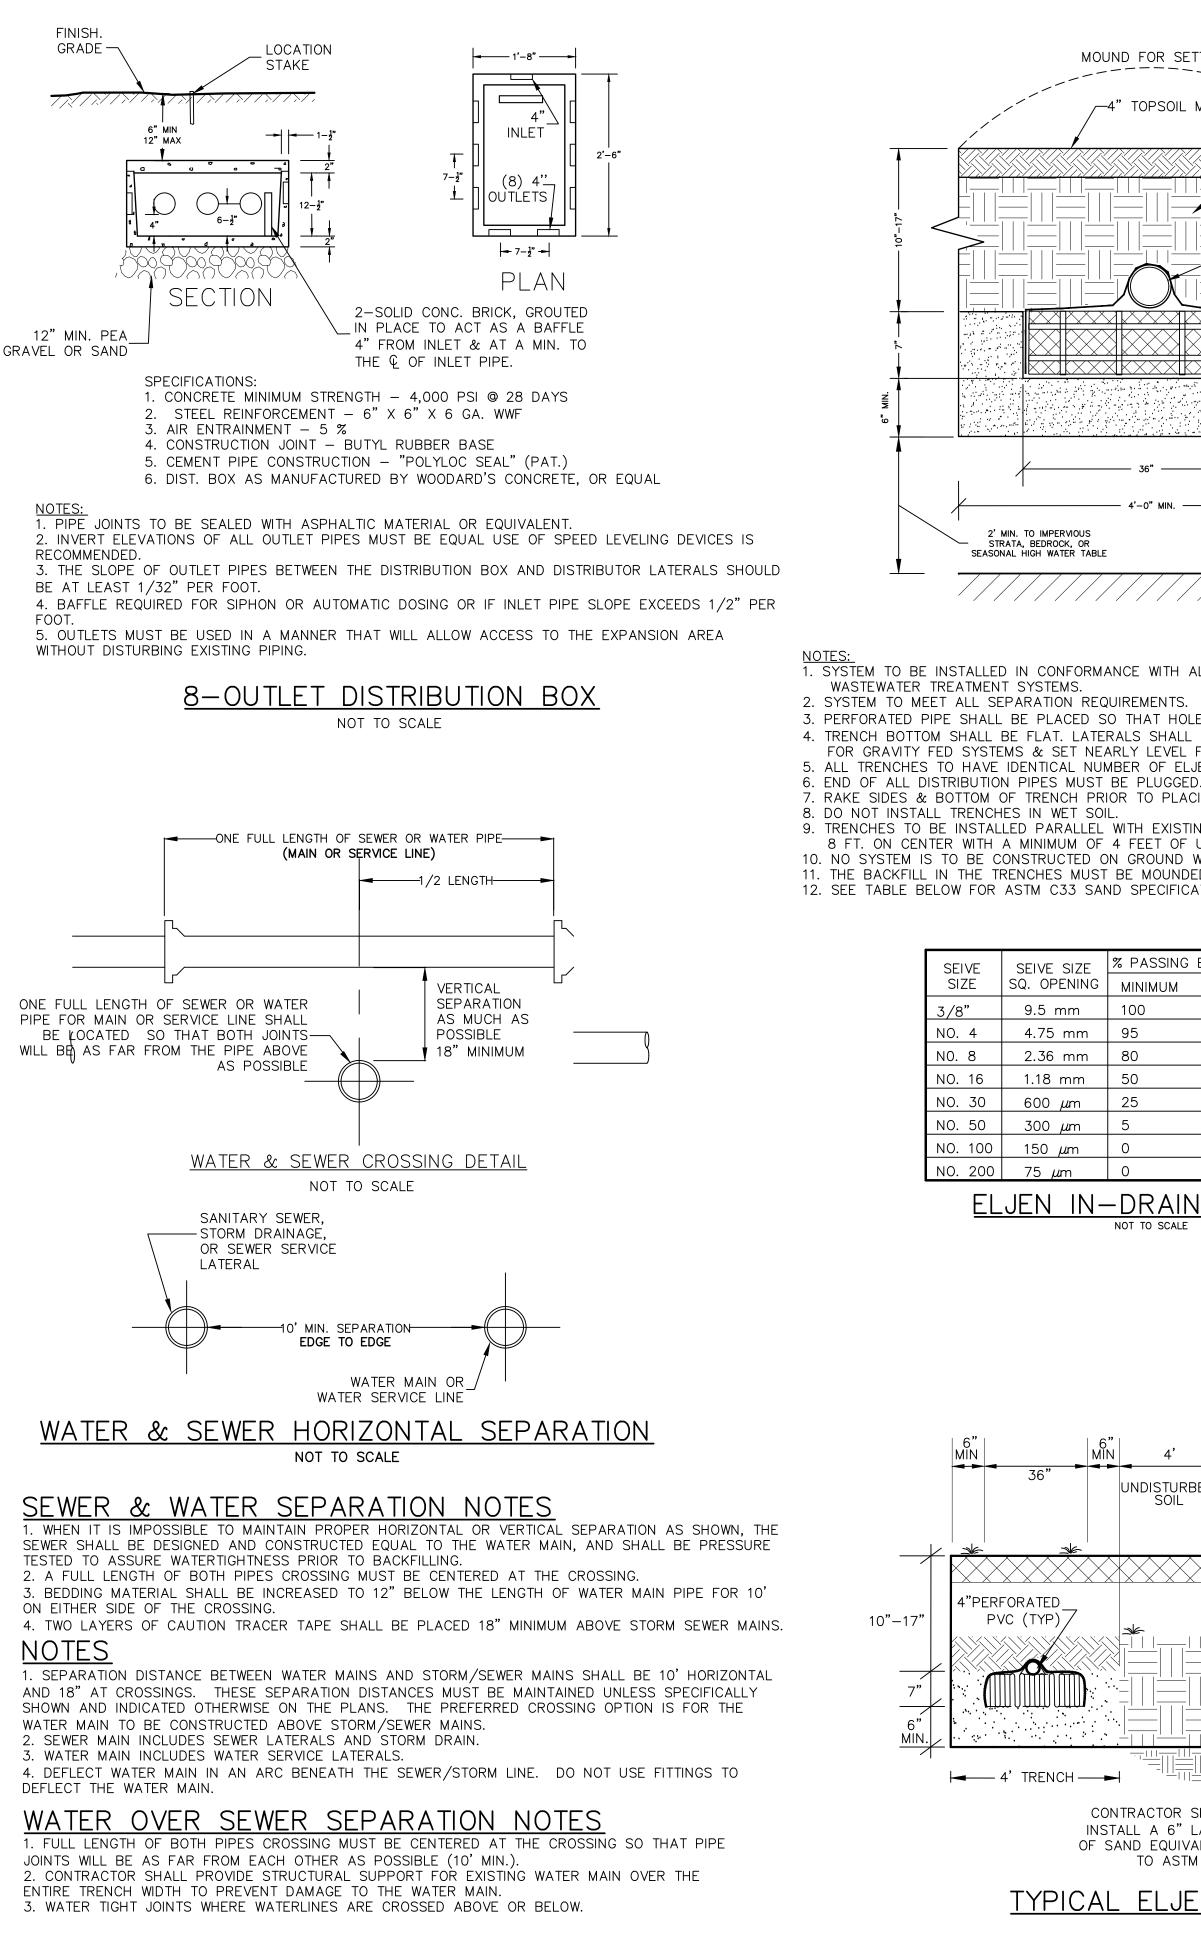

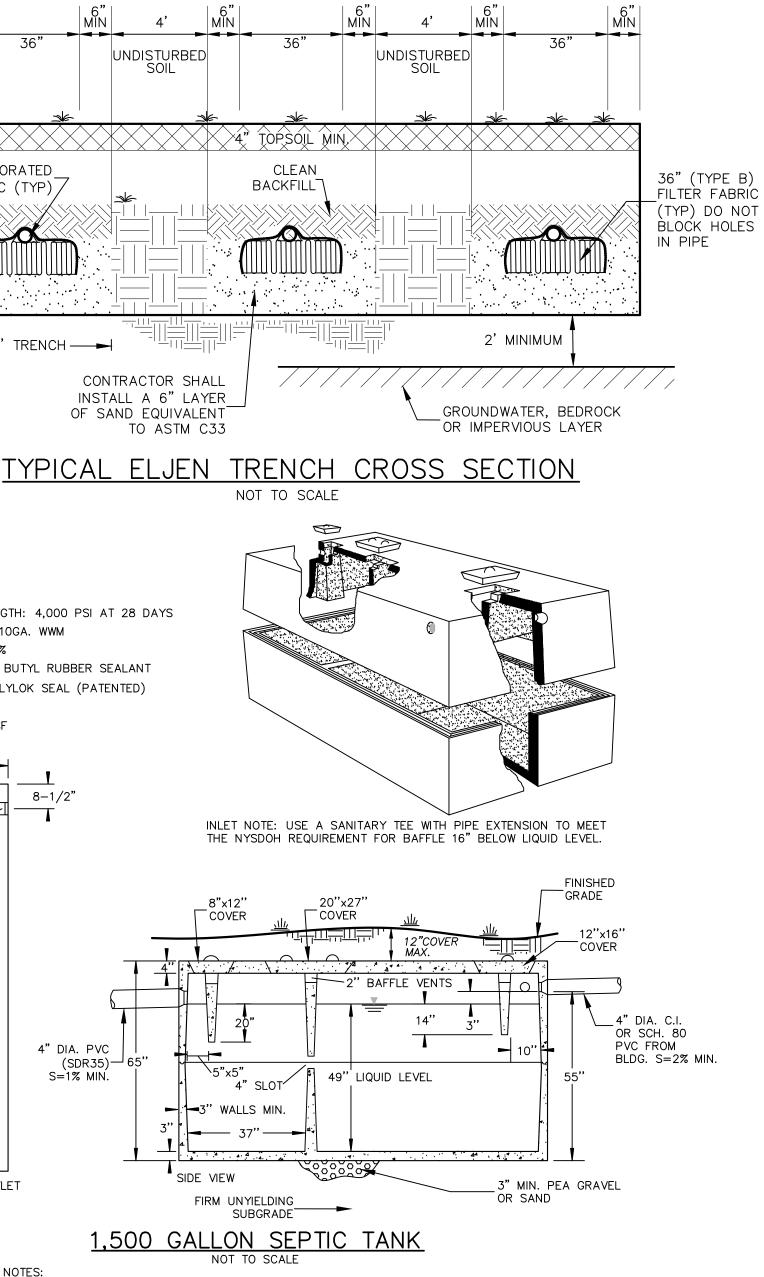

SEIVE

10 16

10.30


9.5 mm

1.18 mm

600 μm

300 *µ*m

SIZE

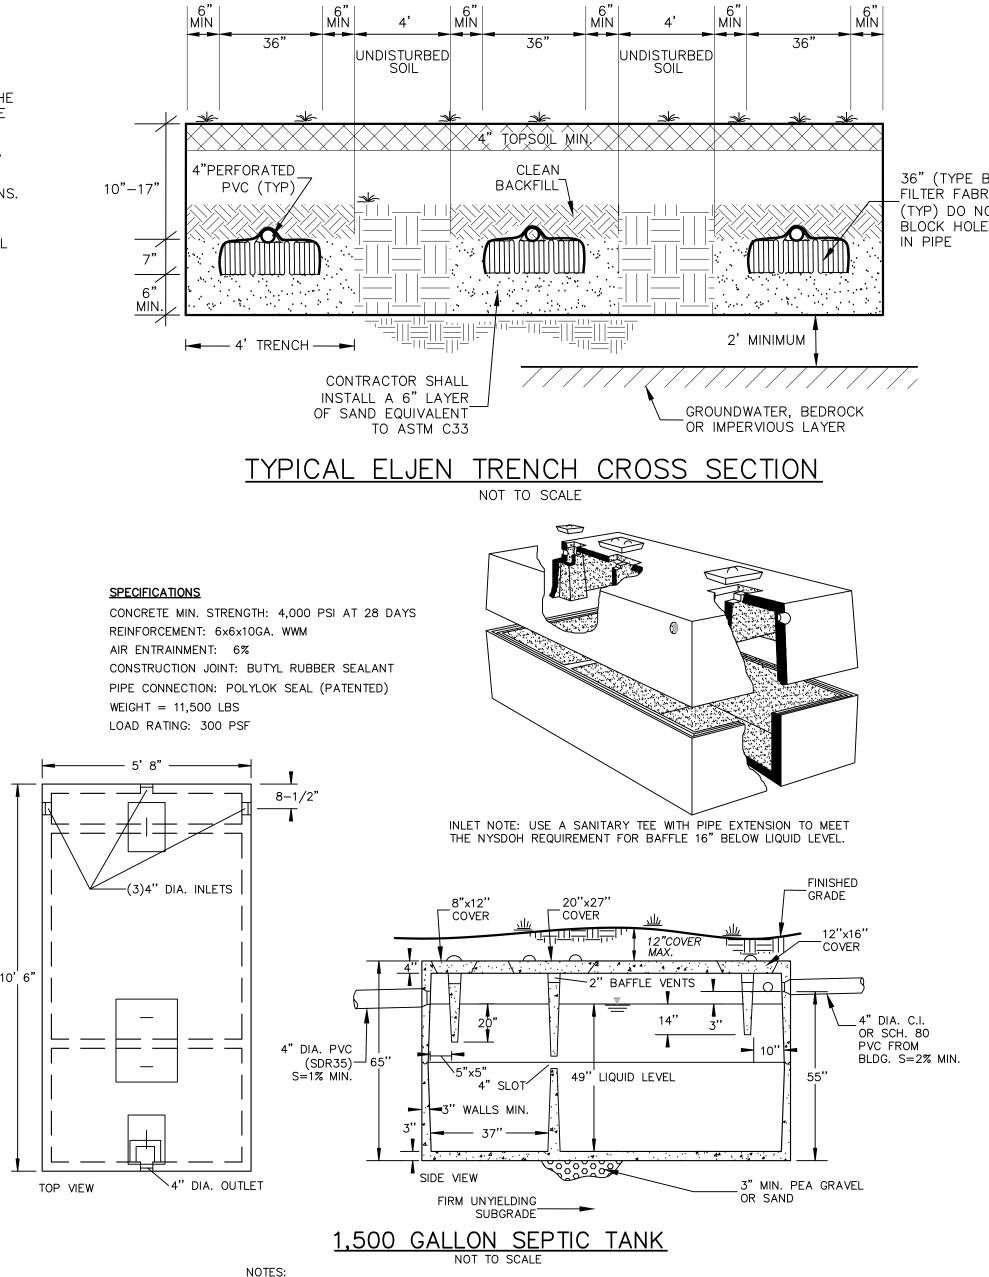



WARNING- IT IS A VIOLATION OF NEW YORK EDUCATIONAL LAW, SECTION 7209.2, FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL FNGINFER OR LAND SURVEYOR. TO ALTER THIS DOCUMENT IN ANY WAY. IF ALTERED, THE ALTERING PERSON SHALL COMPLY WITH THE REQUIREMENTS OF NEW YORK

EDUCATIONAL LAW, SECTION 7209.2

ND CHANGES

ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED-SEAL COPIES MAY CONTAIN UNAUTHORIZED ND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS



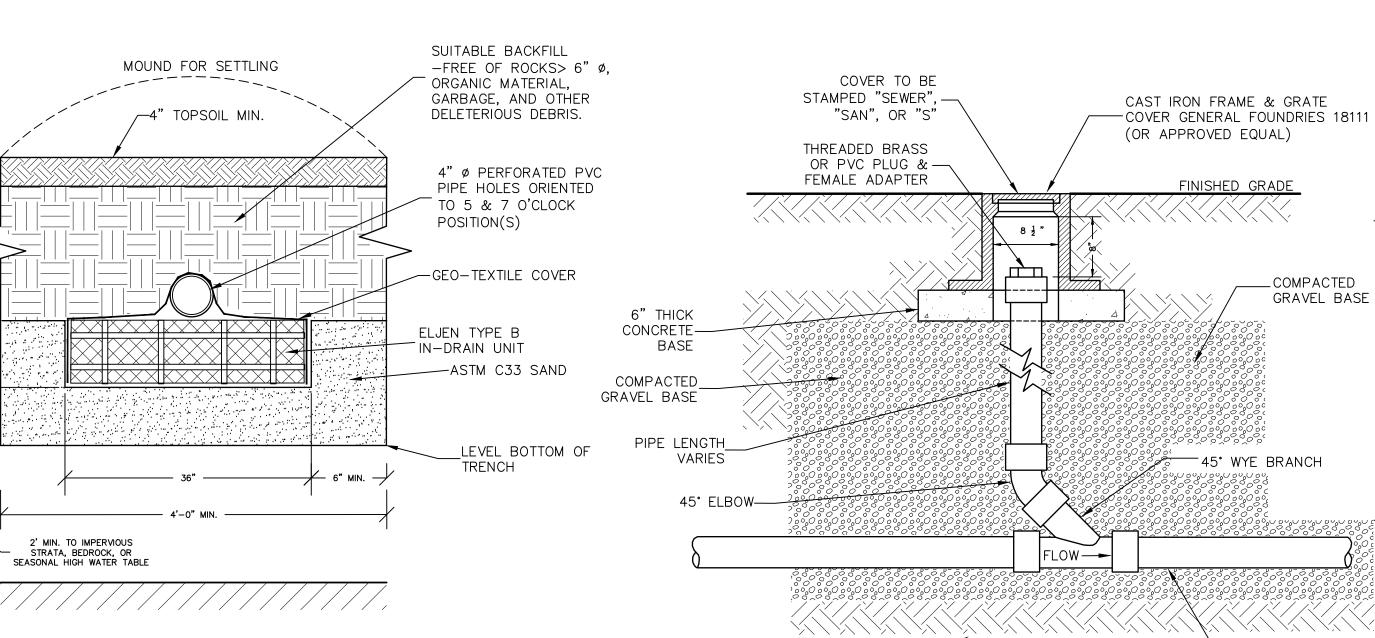


UNDISTURBED EARTH-

1. SYSTEM TO BE INSTALLED IN CONFORMANCE WITH ALL NYSDOH REQUIREMENTS FOR RESIDENTIAL


3. PERFORATED PIPE SHALL BE PLACED SO THAT HOLES ARE FACING 5 & 7 O'CLOCK POSITIONS. 4. TRENCH BOTTOM SHALL BE FLAT. LATERALS SHALL BE INSTALLED AT 1/32" TO 1/16" PER FOOT FOR GRAVITY FED SYSTEMS & SET NEARLY LEVEL FOR DOSED SYSTEMS. 5. ALL TRENCHES TO HAVE IDENTICAL NUMBER OF ELJEN UNITS.

7. RAKE SIDES & BOTTOM OF TRENCH PRIOR TO PLACING SAND.


9. TRENCHES TO BE INSTALLED PARALLEL WITH EXISTING CONTOURS. SPACING SHALL BE A MIN. OF 8 FT. ON CENTER WITH A MINIMUM OF 4 FEET OF UNDISTURBED SOIL BETWEEN TRENCHES. 10. NO SYSTEM IS TO BE CONSTRUCTED ON GROUND WITH A SLOPE IN EXCESS OF 15% GRADE. 11. THE BACKFILL IN THE TRENCHES MUST BE MOUNDED FOR SETTLING. 12. SEE TABLE BELOW FOR ASTM C33 SAND SPECIFICATIONS.

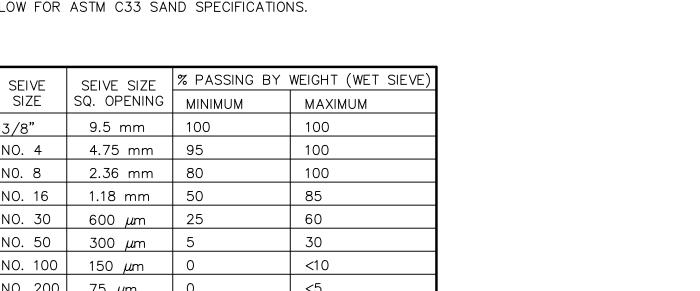


ELJEN IN-DRAIN SECTION

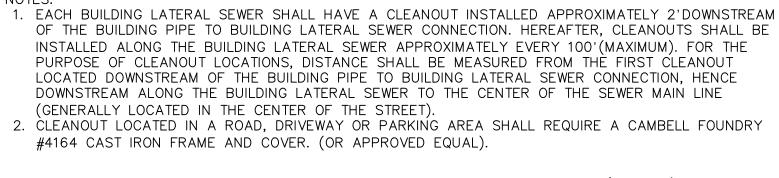



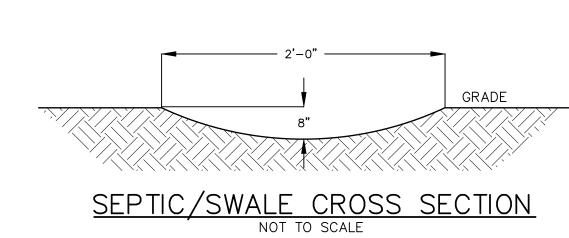

61' MAX LENGTH OF CONCRETE SAND TRENCH 101' MAX LENGTH PERF. PIPE AND TYPE 'B' IN-DRAIN UNITS IF DOSED 1. LATERALS TO BE INSTALLED IN CONFORMANCE WITH ALL STATE AND LOCAL DEPARTMENT OF HEALTH REQUIREMENTS 2. ALL SEPARATION DISTANCES TO BE MAINTAINED. 3. 50% EXPANSION AREA REQUIRED FOR ALL NEWLY INSTALLED RESIDENTIAL SYSTEMS. 100% EXPANSION REQUIRED ON COMMERCIAL SYSTEMS. ELJEN ABSORPTION TRENCH CONFIGURATION NOT TO SCALE

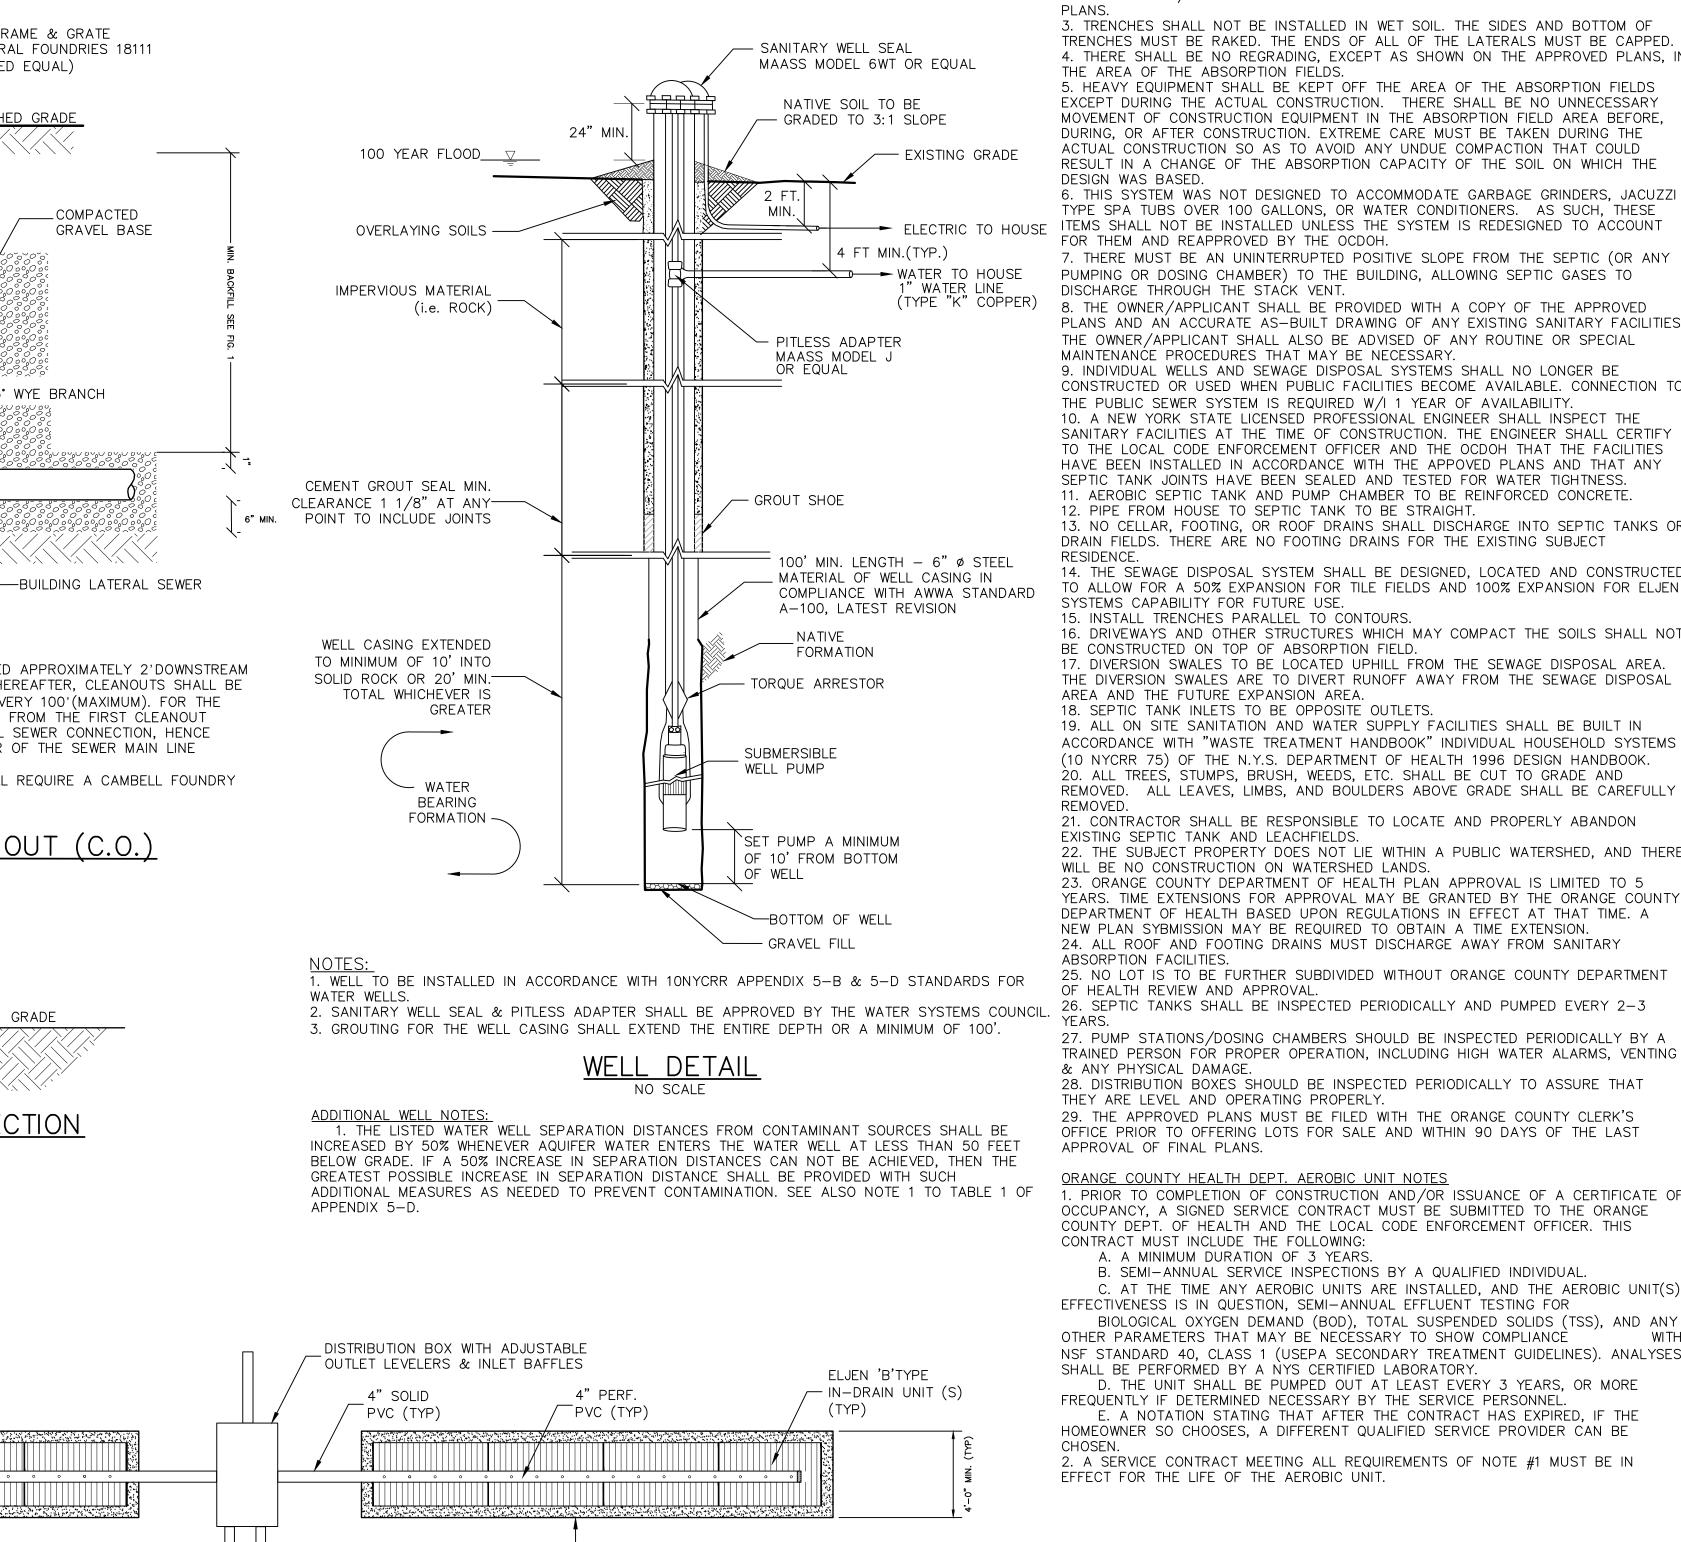

EXCEPT DURING THE ACTUAL CONSTRUCTION. THERE SHALL BE NO UNNECESSARY MOVEMENT OF CONSTRUCTION EQUIPMENT IN THE ABSORPTION FIELD AREA BEFORE, DURING, OR AFTER CONSTRUCTION. EXTREME CARE MUST BE TAKEN DURING THE ACTUAL CONSTRUCTION SO AS TO AVOID ANY UNDUE COMPACTION THAT COULD RESULT IN A CHANGE OF THE ABSORPTION CAPACITY OF THE SOIL ON WHICH THE DESIGN WAS BASED. 6. THIS SYSTEM WAS NOT DESIGNED TO ACCOMMODATE GARBAGE GRINDERS, JACUZZI TYPE SPA TUBS OVER 100 GALLONS, OR WATER CONDITIONERS. AS SUCH, THESE ITEMS SHALL NOT BE INSTALLED UNLESS THE SYSTEM IS REDESIGNED TO ACCOUNT FOR THEM AND REAPPROVED BY THE OCDOH. 7. THERE MUST BE AN UNINTERRUPTED POSITIVE SLOPE FROM THE SEPTIC (OR ANY

SANITARY NOTES

THE AREA OF THE ABSORPTION FIELDS.

BE CHANGED.

PLANS.

1. THE DESIGN AND LOCATION OF SANITARY (WATER & SEWER) SYSTEMS SHALL NOT

2. ALL WELLS W/I 200' OF THE PROJECT HAVE BEEN LOCATED AND SHOWN ON THE

TRENCHES MUST BE RAKED. THE ENDS OF ALL OF THE LATERALS MUST BE CAPPED.

4. THERE SHALL BE NO REGRADING, EXCEPT AS SHOWN ON THE APPROVED PLANS, IN

3. TRENCHES SHALL NOT BE INSTALLED IN WET SOIL. THE SIDES AND BOTTOM OF

5. HEAVY EQUIPMENT SHALL BE KEPT OFF THE AREA OF THE ABSORPTION FIELDS


A. A MINIMUM DURATION OF 3 YEARS. B. SEMI-ANNUAL SERVICE INSPECTIONS BY A QUALIFIED INDIVIDUAL C. AT THE TIME ANY AEROBIC UNITS ARE INSTALLED, AND THE AEROBIC UNIT(S) BIOLOGICAL OXYGEN DEMAND (BOD), TOTAL SUSPENDED SOLIDS (TSS), AND ANY D. THE UNIT SHALL BE PUMPED OUT AT LEAST EVERY 3 YEARS, OR MORE E. A NOTATION STATING THAT AFTER THE CONTRACT HAS EXPIRED, IF THE P.O. BOX 340 MONROE, N.Y. SITE PLAN & LOT LINE COMBINATION FOR 20-030 scale: DAVIDSON DRIVE HOLDINGS, LLC S NOTEI LAKE STATION ROAD TOWN OF CHESTER, COUNTY OF ORANGE, NY 3 - 21 - 22MM CHECKED: SDS DETAILS MM SHEET NO.

19 OF 22

9/16/21 PREPARATION OF PRELIMINARY PLANS 5/19/21 REVISION PER PB MTG. & COMMENT LETTERS

THE DIVERSION SWALES ARE TO DIVERT RUNOFF AWAY FROM THE SEWAGE DISPOSAL 20. ALL TREES, STUMPS, BRUSH, WEEDS, ETC. SHALL BE CUT TO GRADE AND 22. THE SUBJECT PROPERTY DOES NOT LIE WITHIN A PUBLIC WATERSHED, AND THERE WILL BE NO CONSTRUCTION ON WATERSHED LANDS. THEY ARE LEVEL AND OPERATING PROPERLY. OTHER PARAMETERS THAT MAY BE NECESSARY TO SHOW COMPLIANCE

PUMPING OR DOSING CHAMBER) TO THE BUILDING, ALLOWING SEPTIC GASES TO DISCHARGE THROUGH THE STACK VENT. 8. THE OWNER/APPLICANT SHALL BE PROVIDED WITH A COPY OF THE APPROVED PLANS AND AN ACCURATE AS-BUILT DRAWING OF ANY EXISTING SANITARY FACILITIES. THE OWNER/APPLICANT SHALL ALSO BE ADVISED OF ANY ROUTINE OR SPECIAL MAINTENANCE PROCEDURES THAT MAY BE NECESSARY 9. INDIVIDUAL WELLS AND SEWAGE DISPOSAL SYSTEMS SHALL NO LONGER BE CONSTRUCTED OR USED WHEN PUBLIC FACILITIES BECOME AVAILABLE. CONNECTION TO THE PUBLIC SEWER SYSTEM IS REQUIRED W/I 1 YEAR OF AVAILABILITY. 10. A NEW YORK STATE LICENSED PROFESSIONAL ENGINEER SHALL INSPECT THE SANITARY FACILITIES AT THE TIME OF CONSTRUCTION. THE ENGINEER SHALL CERTIFY TO THE LOCAL CODE ENFORCEMENT OFFICER AND THE OCDOH THAT THE FACILITIES HAVE BEEN INSTALLED IN ACCORDANCE WITH THE APPOVED PLANS AND THAT ANY SEPTIC TANK JOINTS HAVE BEEN SEALED AND TESTED FOR WATER TIGHTNESS. 11. AEROBIC SEPTIC TANK AND PUMP CHAMBER TO BE REINFORCED CONCRETE 12. PIPE FROM HOUSE TO SEPTIC TANK TO BE STRAIGHT 13. NO CELLAR, FOOTING, OR ROOF DRAINS SHALL DISCHARGE INTO SEPTIC TANKS OR DRAIN FIELDS. THERE ARE NO FOOTING DRAINS FOR THE EXISTING SUBJECT RESIDENCE. 14. THE SEWAGE DISPOSAL SYSTEM SHALL BE DESIGNED, LOCATED AND CONSTRUCTED TO ALLOW FOR A 50% EXPANSION FOR TILE FIELDS AND 100% EXPANSION FOR ELJEN SYSTEMS CAPABILITY FOR FUTURE USE. 15. INSTALL TRENCHES PARALLEL TO CONTOURS. 16. DRIVEWAYS AND OTHER STRUCTURES WHICH MAY COMPACT THE SOILS SHALL NOT BE CONSTRUCTED ON TOP OF ABSORPTION FIELD. 17. DIVERSION SWALES TO BE LOCATED UPHILL FROM THE SEWAGE DISPOSAL AREA. AREA AND THE FUTURE EXPANSION AREA. 18. SEPTIC TANK INLETS TO BE OPPOSITE OUTLETS. 19. ALL ON SITE SANITATION AND WATER SUPPLY FACILITIES SHALL BE BUILT IN ACCORDANCE WITH "WASTE TREATMENT HANDBOOK" INDIVIDUAL HOUSEHOLD SYSTEMS (10 NYCRR 75) OF THE N.Y.S. DEPARTMENT OF HEALTH 1996 DESIGN HANDBOOK. REMOVED. ALL LEAVES, LIMBS, AND BOULDERS ABOVE GRADE SHALL BE CAREFULLY REMOVED. 21. CONTRACTOR SHALL BE RESPONSIBLE TO LOCATE AND PROPERLY ABANDON EXISTING SEPTIC TANK AND LEACHFIELDS. 23. ORANGE COUNTY DEPARTMENT OF HEALTH PLAN APPROVAL IS LIMITED TO 5 YEARS. TIME EXTENSIONS FOR APPROVAL MAY BE GRANTED BY THE ORANGE COUNTY DEPARTMENT OF HEALTH BASED UPON REGULATIONS IN EFFECT AT THAT TIME. A NEW PLAN SYBMISSION MAY BE REQUIRED TO OBTAIN A TIME EXTENSION. 24. ALL ROOF AND FOOTING DRAINS MUST DISCHARGE AWAY FROM SANITARY ABSORPTION FACILITIES. 25. NO LOT IS TO BE FURTHER SUBDIVIDED WITHOUT ORANGE COUNTY DEPARTMENT OF HEALTH REVIEW AND APPROVAL. 26. SEPTIC TANKS SHALL BE INSPECTED PERIODICALLY AND PUMPED EVERY 2-3 YFARS. 27. PUMP STATIONS/DOSING CHAMBERS SHOULD BE INSPECTED PERIODICALLY BY A TRAINED PERSON FOR PROPER OPERATION, INCLUDING HIGH WATER ALARMS, VENTING & ANY PHYSICAL DAMAGE. 28. DISTRIBUTION BOXES SHOULD BE INSPECTED PERIODICALLY TO ASSURE THAT 29. THE APPROVED PLANS MUST BE FILED WITH THE ORANGE COUNTY CLERK'S OFFICE PRIOR TO OFFERING LOTS FOR SALE AND WITHIN 90 DAYS OF THE LAST APPROVAL OF FINAL PLANS. ORANGE COUNTY HEALTH DEPT. AEROBIC UNIT NOTES OCCUPANCY, A SIGNED SERVICE CONTRACT MUST BE SUBMITTED TO THE ORANGE COUNTY DEPT. OF HEALTH AND THE LOCAL CODE ENFORCEMENT OFFICER. THIS CONTRACT MUST INCLUDE THE FOLLOWING: EFFECTIVENESS IS IN QUESTION, SEMI-ANNUAL EFFLUENT TESTING FOR NSF STANDARD 40, CLASS 1 (USEPA SECONDARY TREATMENT GUIDELINES). ANALYSES SHALL BE PERFORMED BY A NYS CERTIFIED LABORATORY. FREQUENTLY IF DETERMINED NECESSARY BY THE SERVICE PERSONNEL. HOMEOWNER SO CHOOSES, A DIFFERENT QUALIFIED SERVICE PROVIDER CAN BE CHOSEN 2. A SERVICE CONTRACT MEETING ALL REQUIREMENTS OF NOTE #1 MUST BE IN EFFECT FOR THE LIFE OF THE AEROBIC UNIT. MM | 2/6/23 | PH CONSULTANT COMMENTS MM | 1/17/23 | PUBLIC HEARING COMMENTS MM 3/21/22 DEC EMAIL DATED 03/11/22 MM 12/2/21 PER PB MTG & AF COMMENT LETTER MM 3/23/21 ROAD LAYOUT REVISION PER PB MTG. THIS SHEET IS NOT VALID WITHOUT ALL OF THE SHEETS THAT COMPRISE THE S ARDEN CONSULTING ENGINEERS, PLLC T: 845-782-8114 E: MAM@ARDENCONSULTING.NET

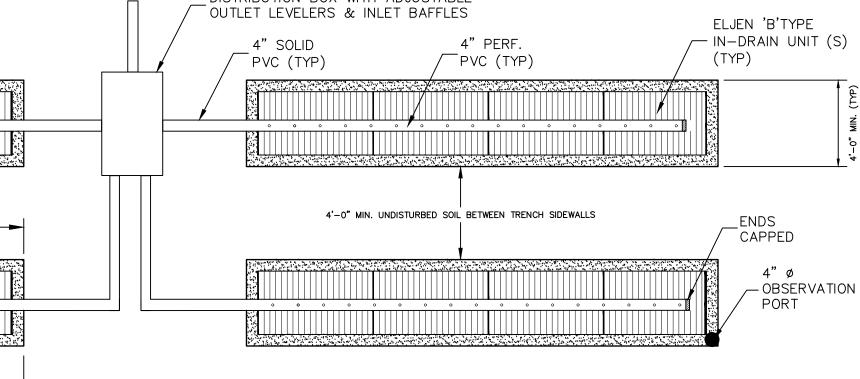


REVISION BY DATE DESCRIPTION MM 8/7/23 SITE RE-DESIGN 7 5. 4. 3. MM MM

CHAEL A. MORGANTE. P.

LIC. NO. 78577

TOWN OF CHESTER PLANNING BOARD APPROVAL

COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. - ALL RIGHTS RESERVED

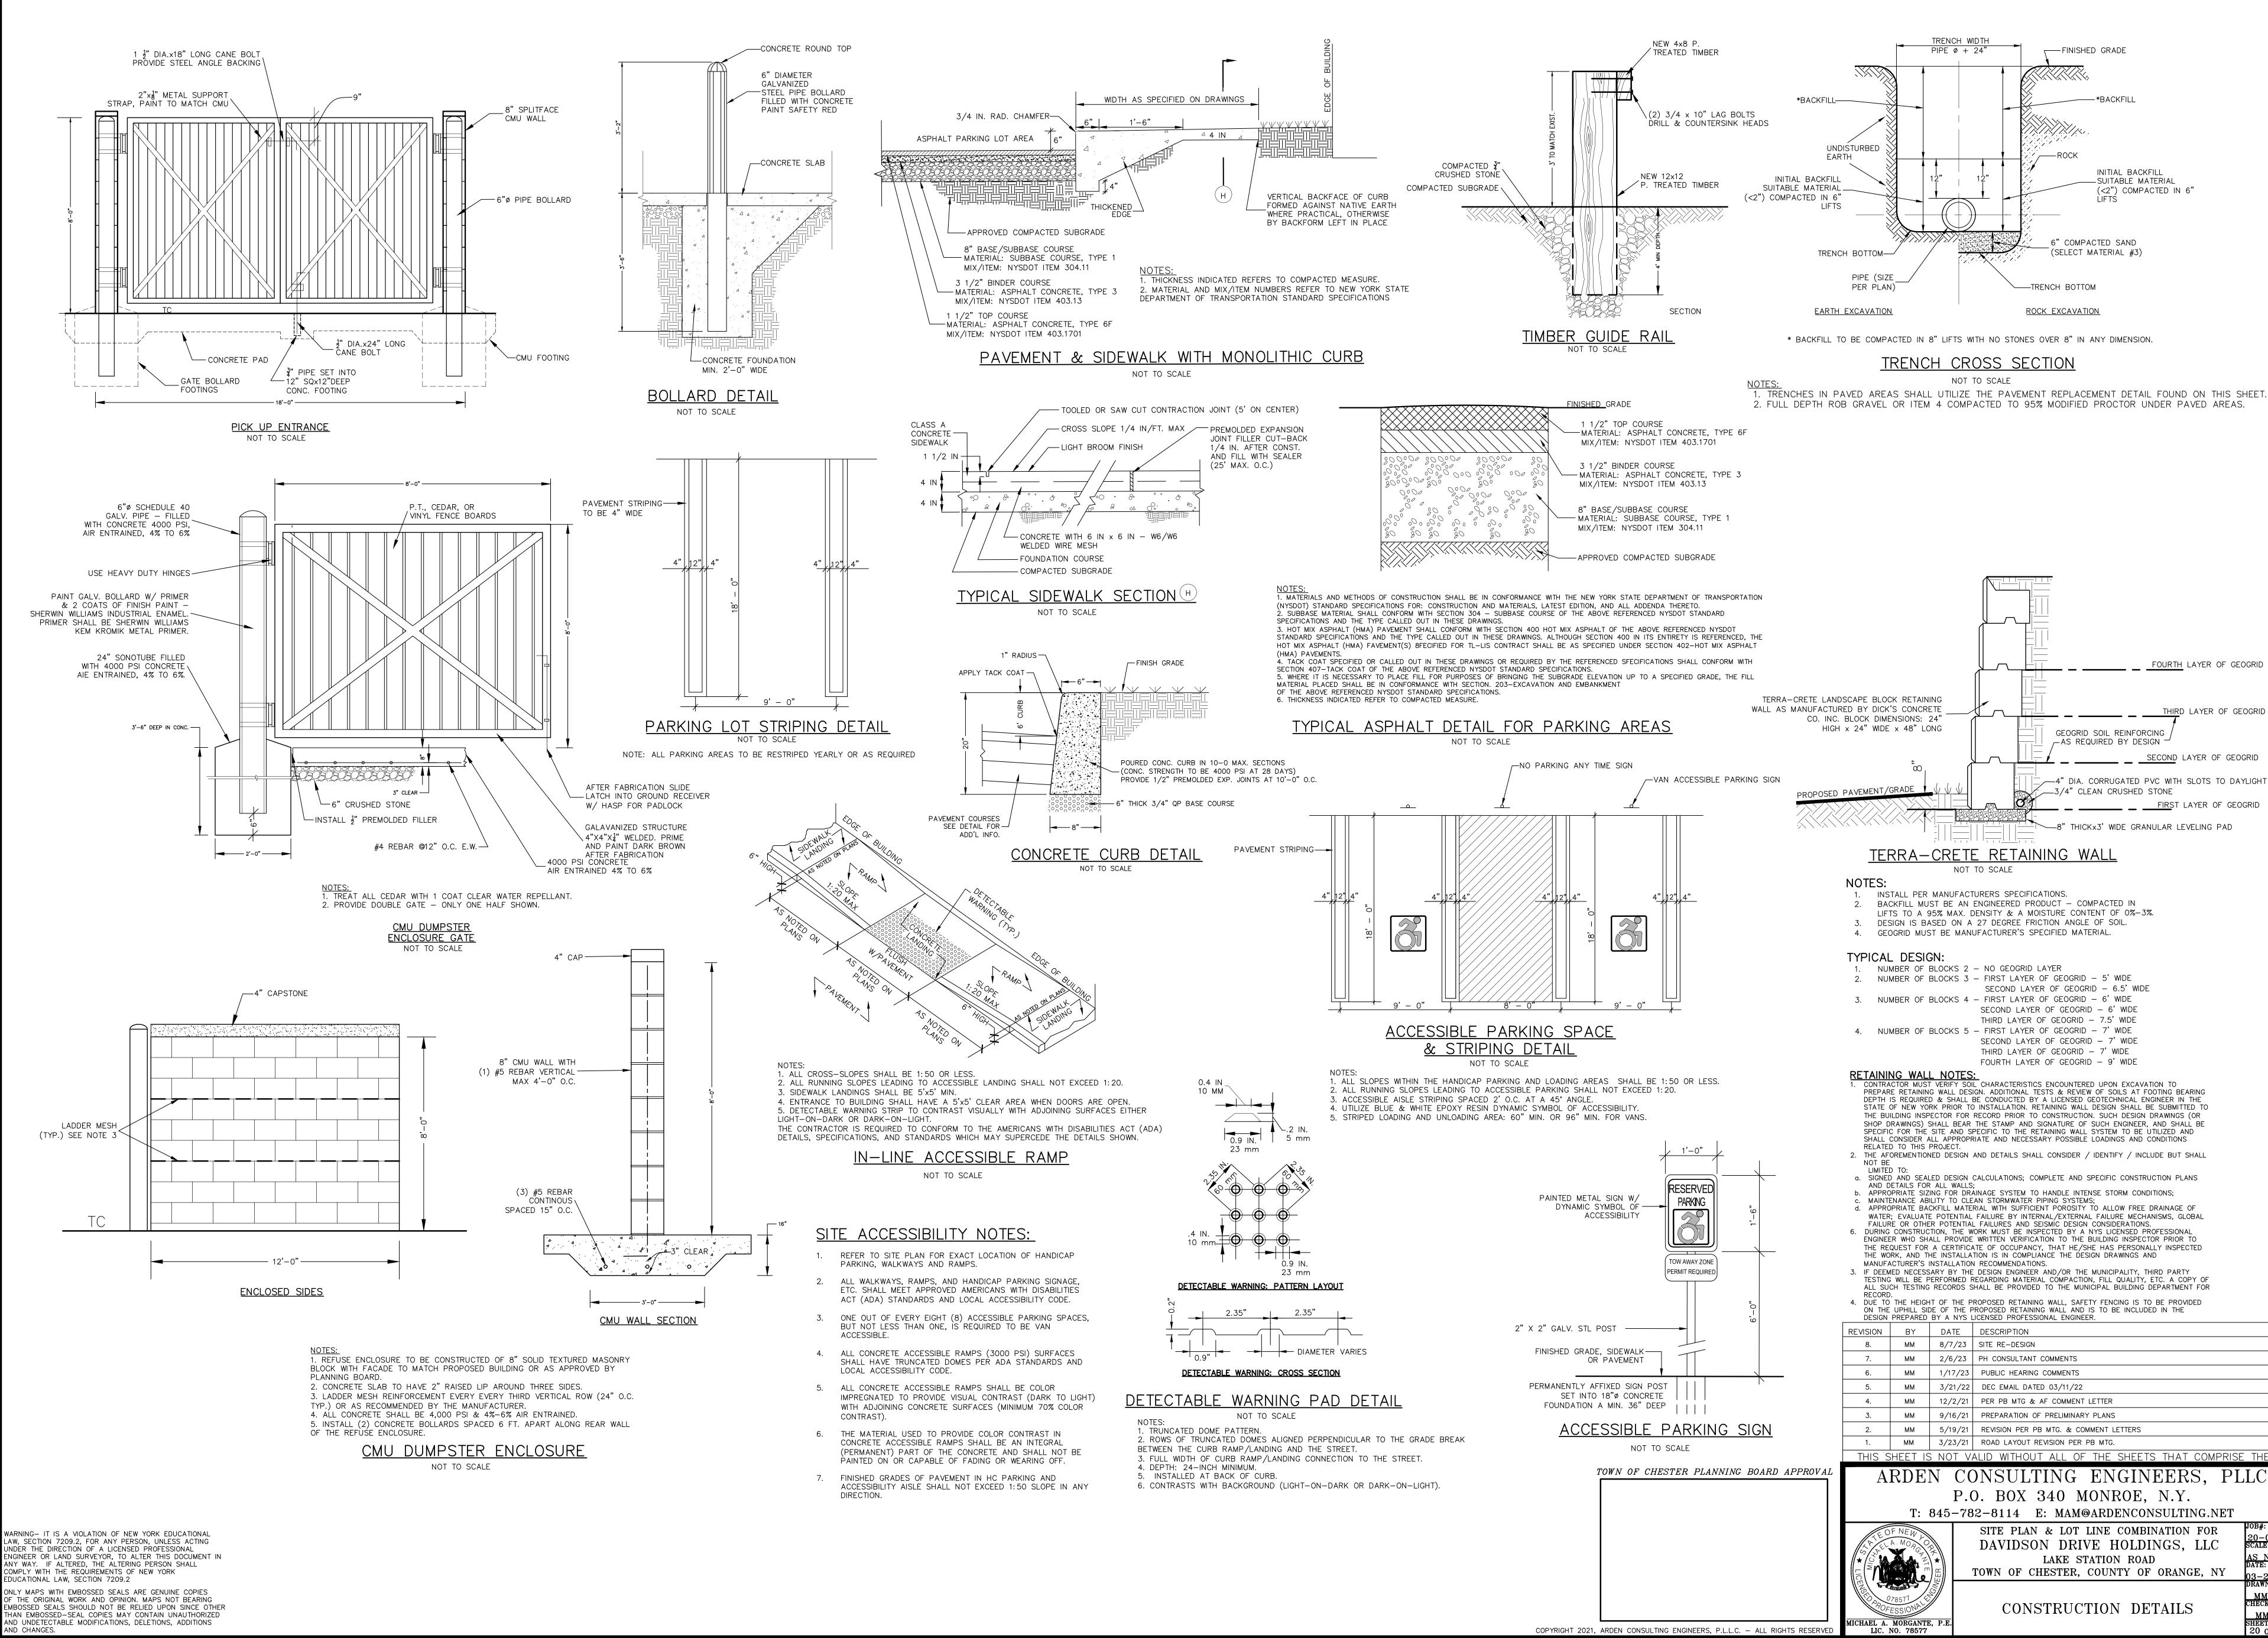

ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED-SEAL COPIES MAY CONTAIN UNAUTHORIZED

*BACKFILL -ROCK INITIAL BACKFILL -SUITABLE MATERIAL (<2") COMPACTED IN 6" LIFTS 6" COMPACTED SAND (SELECT MATERIAL #3) ROCK EXCAVATION FOURTH LAYER OF GEOGRID THIRD LAYER OF GEOGRID GEOGRID SOIL REINFORCING -AS REQUIRED BY DESIGN -SECOND LAYER OF GEOGRID -4" DIA. CORRUGATED PVC WITH SLOTS TO DAYLIGHT -3/4" CLEAN CRUSHED STONE ______ FIRST LAYER OF GEOGRID -8" THICKx3' WIDE GRANULAR LEVELING PAD SECOND LAYER OF GEOGRID - 6.5' WIDE SECOND LAYER OF GEOGRID - 6' WIDE THIRD LAYER OF GEOGRID - 7.5' WIDE SECOND LAYER OF GEOGRID - 7' WIDE FOURTH LAYER OF GEOGRID - 9' WIDE THIS SHEET IS NOT VALID WITHOUT ALL OF THE SHEETS THAT COMPRISE THE SI ARDEN CONSULTING ENGINEERS, PLLC P.O. BOX 340 MONROE, N.Y.


> SITE PLAN & LOT LINE COMBINATION FOR 20-030 SCALE: DAVIDSON DRIVE HOLDINGS, LLC S NOTEI LAKE STATION ROAD TOWN OF CHESTER, COUNTY OF ORANGE, NY 3 - 21 - 22MM CHECKED: CONSTRUCTION DETAILS MM SHEET NO. 20 OF 22

- DISC, OR TILLER, MIXING AND CIRCULATING AIR AND COMPOST INTO SUBSOILS. 3) ROCK-PICK UNTIL UPLIFTED STONE/ROCK MATERIALS OF FOUR INCHES AND LARGER SIZE ARE CLEANED OFF THE SITE 4) APPLY TOPSOIL TO A DEPTH OF SIX INCHES.


GROW DESIRED PLANTS.

- ARE MADE (THINNING, INVASIVE PLANT REMOVAL ETC.)
- 3) FIVE YEAR MAINTENANCE OPERATIONS INCLUDES;
- b) RESEEDING TO REPAIR BARE OR ERODING AREAS TO ASSURE GRASS STABILIZATION
- DURING THE FIRST YEAR. IRRIGATION PLAN MAY BE ADJUSTED ACCORDING TO THE RAIN EVENT.
- SOIL STRUCTURE, AND KEEP THE SITE FREE OF VEHICULAR AND FOOT TRAFFIC OR OTHER WEIGHT LOADS. SOMETIMES IT MAY BE NECESSARY TO DE-THATCH THE TURF EVERY FEW YEARS.

THE DRAINAGE FACILITIES IN ACCORDANCE WITH THE NYSDEC STORMWATER MANAGEMENT DESIGN MANUAL. THESE

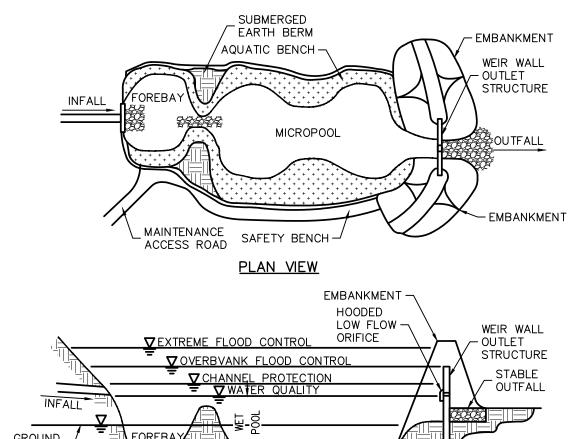



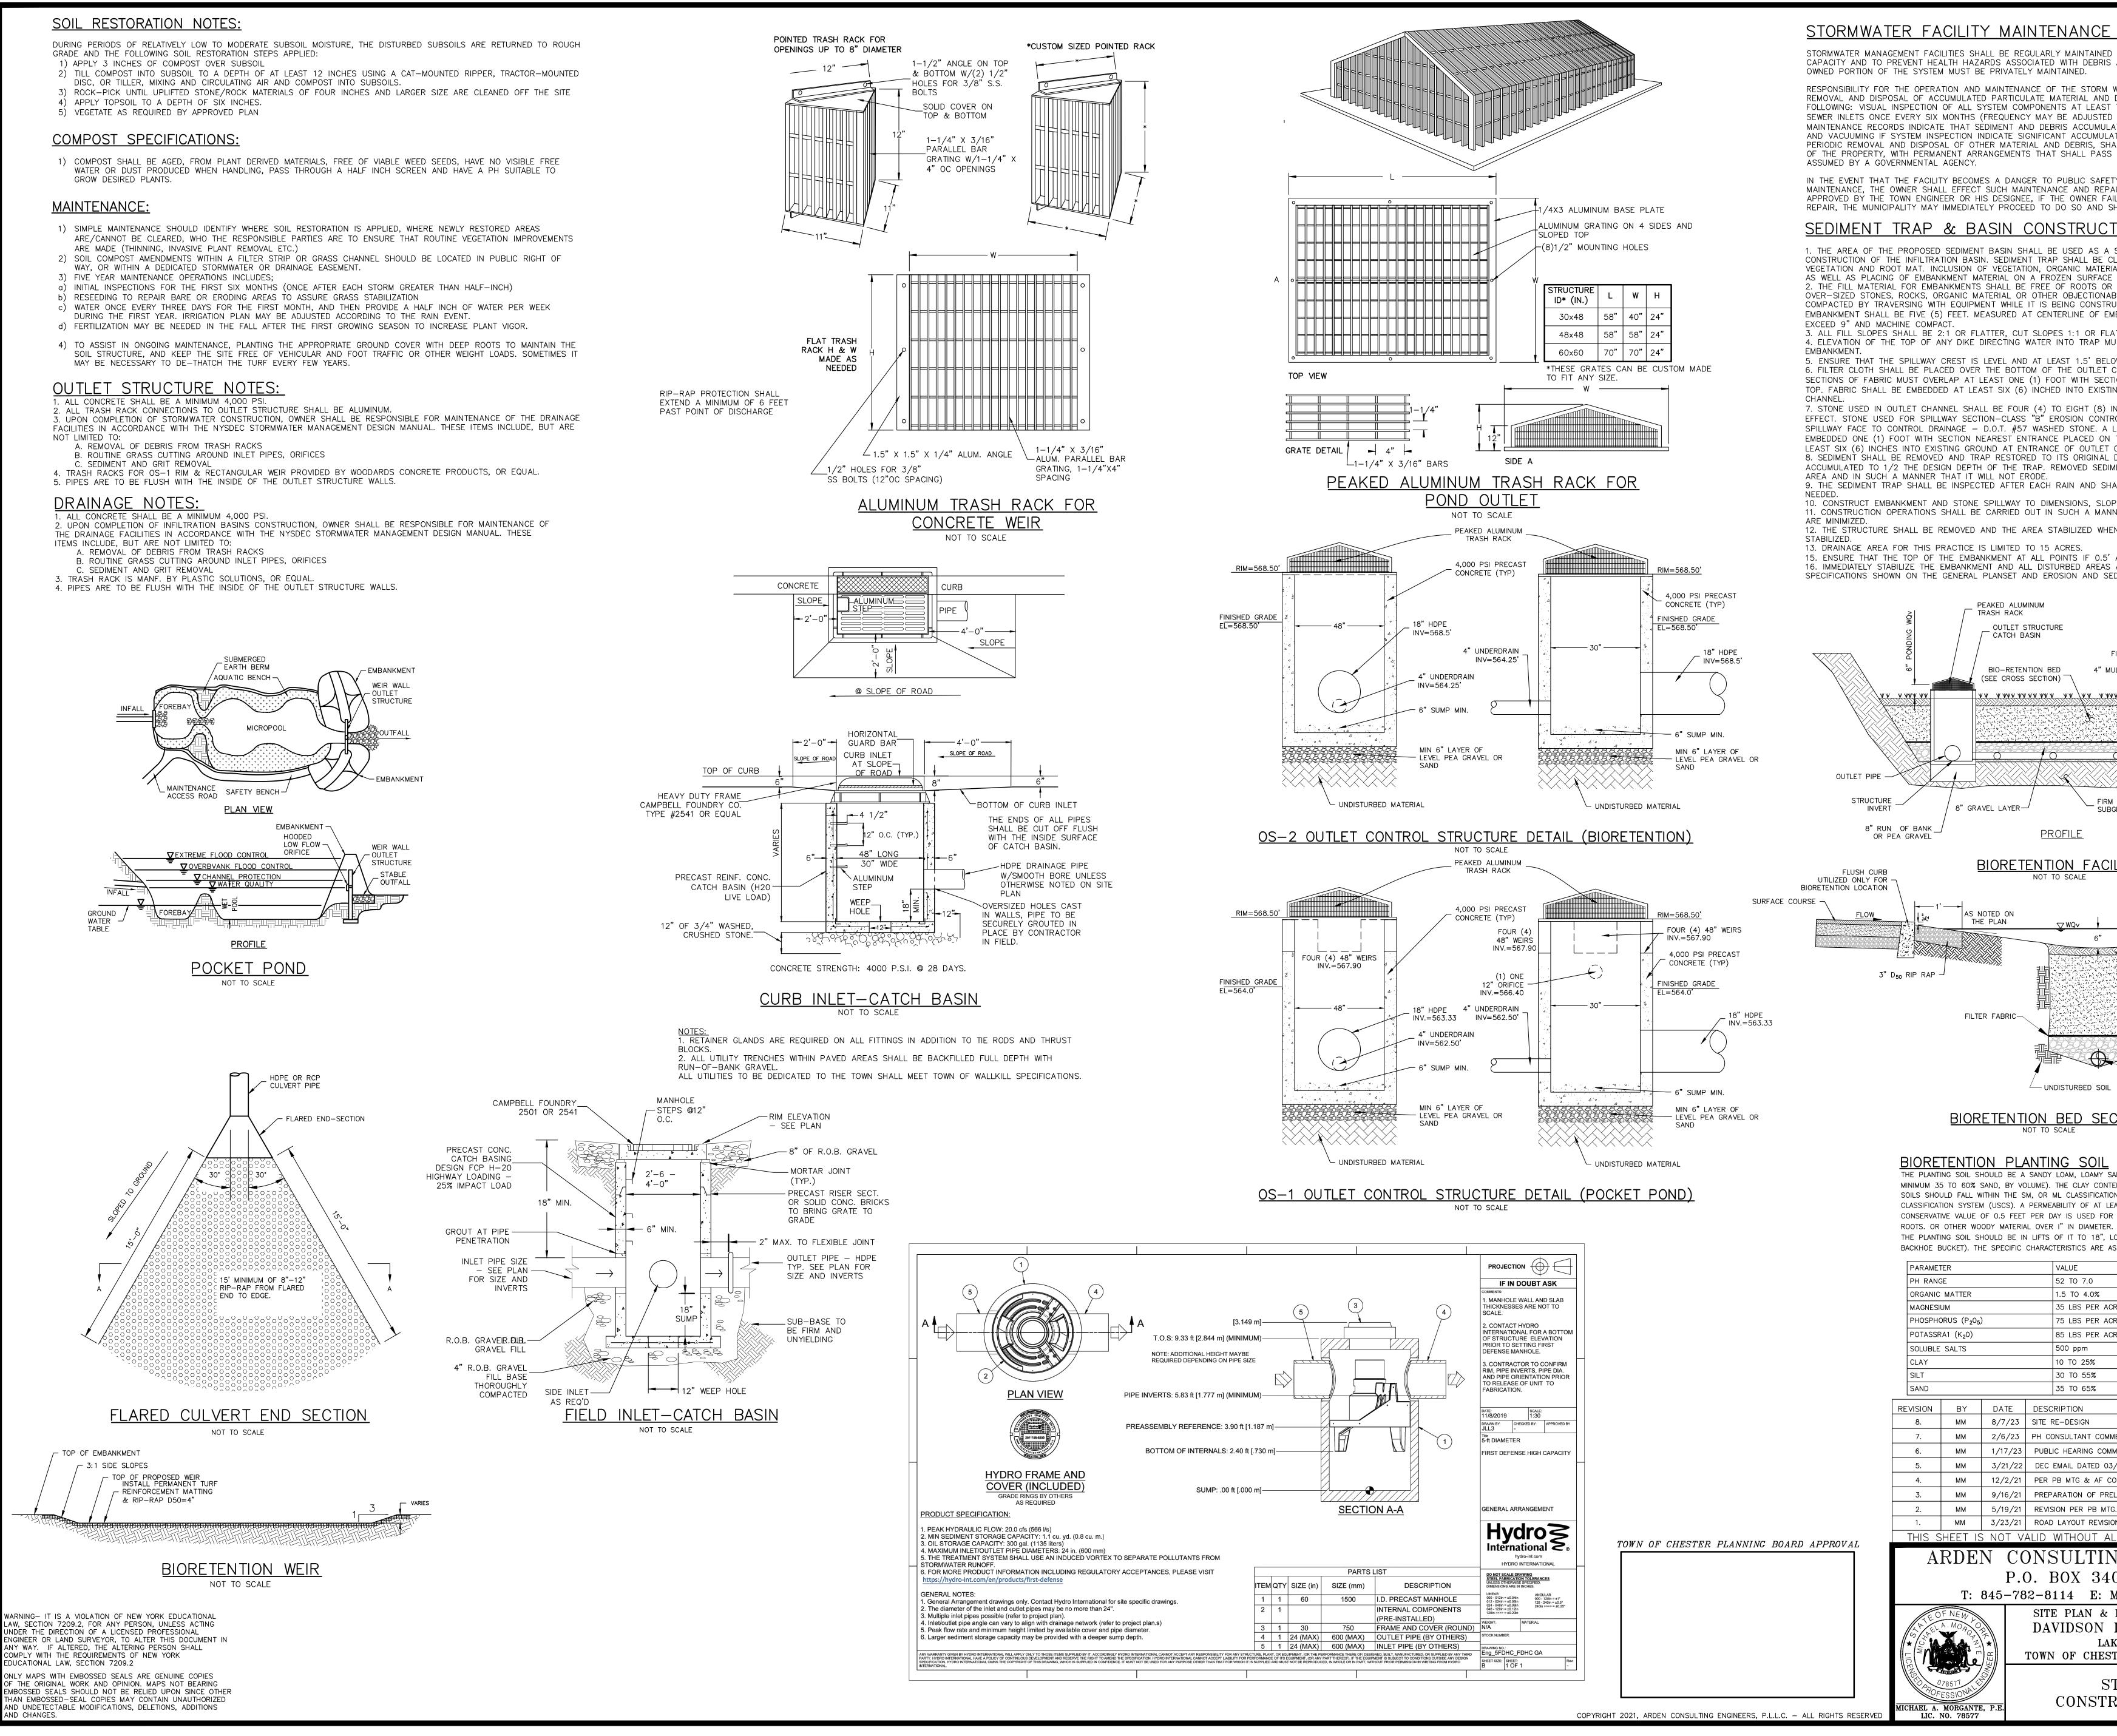

NOTES: TO ENSURE THEY FUNCTION AT DESIGN AND STAGNANT WATER. THE PRIVATELY	
WATER FACILITIES, INCLUDING PERIODIC DEBRIS, BUT NOT LIMITED TO THE TWICE A YEAR; VACUUMING OF ALL STORM TO ONCE A YEAR IF FIRST YEAR ATION IS INSIGNIFICANT); REVERSE FLUSHING ATION OF SEDIMENT IN THE PIPES; AND ALL REMAIN WITH THE OWNER OR OWNERS TO ANY SUCCESSIVE OWNER, UNLESS	
TY OR PUBLIC HEALTH, OR IT IS IN NEED OF AIR OF THE FACILITY IN A MANNER THAT IS ILS TO PERFORM SUCH MAINTENANCE AND SHALL BILL THE COST TO THE OWNER.	
TION SPECIFICATIONS: SEDIMENT TRAP PRIOR TO FINAL CLEARED, GRUBBED AND STRIPPED OF ANY IAL, OR FROZEN SOIL IN THE EMBANKMENT, IS PROHIBITED. OTHER WOODY VEGETATION AS WELL AS BLE MATERIAL. THE EMBANKMENT SHALL BE UCTED IF POSSIBLE. MAXIMUM HEIGHT OF MBANKMENT. PLACE FILL IN LIFTS NOT TO	
UST EQUAL OR EXCEED HEIGHT OF OW THE TOP OF THE DAM AT ALL POINTS. CHANNEL PRIOR TO PLACEMENT OF STONE. TION NEAREST THE ENTRANCE PLACED ON NG GROUND AT ENTRANCE OF OUTLET	
NCHES (RIP RAP). TO PROVIDE A FILTERING ROL STONE. STONE USED ON INSIDE LAYER OF FILTER CLOTH SHALL BE TOP. FABRIC SHALL BE EMBEDDED AT CHANNEL. DIMENSIONS WHEN SEDIMENT HAS MENT SHALL BE DEPOSITED IN A SUITABLE	
ALL BE REPAIRED AS PES AND ELEVATIONS SHOWN ON THE PLAN. NER THAT EROSION AND WATER POLLUTION IN DRAINAGE AREA HAS BEEN PROPERLY	
ABOVE NATURAL SURROUNDING GROUND. AS IN ACCORDANCE WITH THE EDIMENT CONTROL PLANS.	
SPILLWAY PERIMETE	R BERM
FILTER SURFACE	
UNYIELDING UNDERDRAIN COLLECTION GRADE SYSTEM - MIN. SLOPE 0.5%	
ILITY OVERFLOW WEIR PERIM	ETER BERM
THE YANA	
2" MIN. MULCH	
4" PERFORATED PIPE IN 8" GRAVEL	
JACKET	
AND, LOAM (USDA). OR A LOAM/SAND MIX (SHOULD ENT FOR THESE SOILS SHOULD BE LESS THAN 25% DNS OD THE UNIFIED SOIL EAST 1.0 FEET PER DAY (0 5"/HR) IS REQUIRED (A	BY VOLUME.
R DESIGN). THE SOIL SHOULD BE FREE OF STONES, S . AND BRUSH OR SEED FROM NOXIOUS WEEDS. PLAC LOOSELY COMPACTED (TAMPED LIGHTLY WITH A DOZEF IS FOLLOWS:	EMENT OF
RE, MINIMUM RE, MINIMUM RE, MINIMUM	
MENTS	
MENTS 5/11/22 OMMENT LETTER	
ELIMINARY PLANS G. & COMMENT LETTERS DN PER PB MTG.	
IL OF THE SHEETS THAT COMPRISE	
NG EINGIINEERS, PL O MONROE, N.Y. MAM@ARDENCONSULTING.NET	
	JOB#: 20-030 SCALE:
KE STATION ROAD TER, COUNTY OF ORANGE, NY	AS NOTED DATE: 03-21-22 DRAWN:
TORMWATER RUCTION DETAILS	MM CHECKED: MM SHEET NO.
	SHEET NO. 21 OF 22

AN ENDANGERED SPECIES IN NEW YORK STATE Bog Turtle This area of the Town of Chester near the Davidson Drive Holdings, LLC project on Davidson Drive may contain suitable habitat for the Bog Turtle, which is a New York State Listed Endangered Species. This species is an important part of our ecosystem and it is illegal to kill, harm or harass them. In New York, bog

turtles occur in open-canop

meadows, and calcareous

egetation always includes/

This brochure's intent is to

educate the public of their

provide valuable informatio

should an encounter occur even though sightings are

potential presence and

rare

various species of sedges

wet meadows, sedge

groundwater and the

fens often fed by

BOG TURTLE EDUCATION

For

& ENCOUNTER PLAN

Davidson Drive Holdings, LLC

Davidson Drive **TOWN OF Chester** March 15, 2022

Applicant Information: EZ Develop, Inc. Israel Vanchozker Joseph Herskovitz 412 N Main St Monroe, NY 10950

Note: This report in conjunction with the project plans make up the complete Bog Turtle Education & Encounter Plan.

> Prepared by: Michael Nowicki / Ecological Solutions LLC 121 Leon Stocker Drive Stratton, VT 05360

WARNING- IT IS A VIOLATION OF NEW YORK EDUCATIONAL LAW, SECTION 7209.2, FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR, TO ALTER THIS DOCUMENT IN ANY WAY. IF ALTERED, THE ALTERING PERSON SHALL COMPLY WITH THE REQUIREMENTS OF NEW YORK EDUCATIONAL LAW, SECTION 7209.2

ONLY MAPS WITH EMBOSSED SEALS ARE GENUINE COPIES OF THE ORIGINAL WORK AND OPINION. MAPS NOT BEARING EMBOSSED SEALS SHOULD NOT BE RELIED UPON SINCE OTHER THAN EMBOSSED-SEAL COPIES MAY CONTAIN UNAUTHORIZED AND UNDETECTABLE MODIFICATIONS, DELETIONS, ADDITIONS AND CHANGES.



In case of a sighting, please call Michael Nowicki at 203-910-4716 And

The NYSDEC Wildlife Office to Report the incident within 24 Hours at 845-256-3098 or Wildlife.R3@dec.ny.gov. Please Provide the location, the project Name, and explanation of incident.







Fact Sheet

- The bog turtle is New York's smallest turtle, reaching a maximum length of 4.5 inches. A bright yellow or orange blotch on each side of its head and neck are a distinctive feature of this species.
- Mating generally occurs in the spring but autumn mating events are documented. Nesting sites are typically located inside the upper part of an unshaded tussock (a tall, thick bunch of grass).
- Overwintering sites are typically found in densely vegetated areas often in association with tree roots and other submerged structures along streams or near underground springs.
- In New York, the bog turtle is generally found in open, early-successional types of habitats such as wet meadows or open calcareous boggy areas generally dominated by sedges (Carex spp.) or sphagnum moss. Like other cold-blooded or ectothermic species, it requires habitats with a good deal of sunlight for basking and nesting. Plants such as purple loosestrife (Lythrum salicaria) and reed (Phragmites australis) can quickly invade such areas resulting in the loss of basking and nesting habitat.
- Contact the response number on this brochure to have this species identified and relocated from the work area if necessary. A trained state licensed professional will safely relocate the turtle.

Davidson Drive Holdings, LLC Summary of Proposed Conservation Measures for the Bog Turtle

CONSTRUCTION

Worker Training

- At the pre-construction meeting for the project, the designated, knowledgeable biologist (the Biologist) will review the project's Bog Turtle Education and Encounter Plan (BTEEP) with the site Engineer and the Contractors, and will provide them with necessary information to identify and watch out for turtles during construction, and to provide similar training to all personnel working on the site during construction.
- A copy of the BTEEP will be posted on-site at the construction office and copies of the BTEEP pamphlet will be provided to personnel as part of their training.

Turtle Barrier Fence

- Prior to the start of construction at the site, and within the bog turtle hibernation period (between October 31st and March 31st, in accordance with the BTEEP and the project's Construction Sequence, a continuous row of Turtle Barrier Fence (Double Silt Fence) will be installed between the construction area and the wetland/buffer area, in the general location as shown on Drawing 10 and 11 of the site plans.
- The Turtle Barrier Fence will be: 1. Installed in accordance with the Turtle Barrier Fence / Double Silt Fence Detail provided on Drawing 11 of the site plans.
- 2. Buried at the bottom a minimum of 6" into the ground, per the Detail.
- 3. Examined each day by construction workers until construction activities are completed. Any breaches in the silt fencing must be repaired immediately. Work will not re-commence until the permitted person arrives at the site to move the bog turtle to a safe area away from the construction. A worker shall be assigned to monitor the location of the turtle until it is removed from the construction area. In addition, work can not recommence until the NYSDEC provides notice in writing that work can proceed.
- Turtle Barrier Fencing will be maintained until the completion of the project and then completely removed after construction activities are completed.

Additional Mitigation Measures during Construction

- The contractor shall minimize open excavations and structures to avoid turtle pit fall hazards. Excavations completed between April 1st and October 1st shall be backfilled on the same day or a ramp (30-degree angle maximum) will be placed inside the excavation to enable turtles to climb out.
- No construction work or staging of equipment will occur in the wetland or within the potential bog turtle habitat area. Such activities will only be conducted in accordance with the approved site plans.

Procedure for Bog Turtle Encounter and Relocation

- In the event that a bog turtle is found within the work area:
 - 1. All work will cease immediately.

 - into the wetland.

Contact Information for Qualified Biologist: Michael Nowicki at 203-910-4716

- construction area.

- the incident.

- as part of their training.

fencing, fencing needs to be inspected, repaired, and the area swept and signed off on by the monitor. To restart work, written approval is required from the department.	Measure 1. 2. 3. 4. 5. 6. 7. 8.	Measure to Take During Encounters s to take during encounters include: All personnel working at the site will be trained to be able to identify, and locate Bog turtles by a knowledgeable biologist. Turtles can only be moved by a qualified biologist with knowledge of Bog and relocation procedures who is also licensed by the NYSDEC to handle Bog turtles. It is illegal to take, import, transport, possess, or sell an animal listed as threatened without a license. If a turtle is seen, stop all work immediately. To restart work, written approval is required form the NYSDEC. Contact the contractor in charge and delay work in the area until the turtle has moved safely from the area. Allow the turtle to continue on its way. If the turtle does not move along on its own or is found in the barrier fence, contact the following response number to have a trained, NYS licensed professional, safely relocate the turtle (Michael Nowicki at 203-910-4716). Contact the NYSDEC wildlife office to report the incident within 24 hours at 845-256-3098 or wildlife.r3@dec.ny.gov. Please provide the location, the project name, and explanation of incident. If the turtle was found within a turtle exclusion fence, work cannot commence until fencing is inspected by and signed off on by a knowledgeable Bog turtle consultant (turtle monitor) and the NYSDEC issues written approval that work can commence. The project sponsor will provide educational materials for all contractors and residents to inform of the potential for Bog turtle encounters and what to do if a turtle is encountered to ensure the animals are not collected or persecuted. If a turtle is converted.	<section-header><text><text></text></text></section-header>
	9.	inform of the potential for Bog turtle encounters and what to do if a turtle is encountered to ensure the animals are not collected or persecuted. If a turtle is found within the temporary barrier fencing, fencing needs to be inspected, repaired, and the area swept and signed off on by the monitor. To restart work, written	

Bog Turtle Education & Encounter Plan for Davidson Drive Holdings, LLC

• All stormwater basins are designed to be constructed with interior slopes graded at a maximum of 3H:1V, which would allow turtles and other wildlife to escape. • Disturbed areas will be stabilized within 7 days of final grading with permanent cover in the form of vegetation or pavement, as appropriate, in accordance with the Erosion and Sediment Control Notes on Sheet 11 as prepared by Arden Consulting Engineers, PLLC.

2. Workers are not to touch the turtle. The turtle is not to be collected or persecuted. 3. Turtles can only be moved by a qualified biologist with knowledge of bog turtles and relocation procedures, who is licensed by the NYSDEC to handle bog turtles. 4. Workers are to contact the contractor in charge, who will contact a qualified biologist to safely move the bog turtle out of the construction zone and place back

5. Work will not re-commence until the permitted person arrives at the site to move the bog turtle to a safe area away from the construction, A worker shall be assigned to monitor the location of the turtle until it is removed from the

6. If the turtle is found within the turtle barrier fence, work cannot re-commence until the fencing is inspected by and signed off on by the qualified biologist, and until the NYSDEC provides notice in writing that work can proceed.

7. In addition, the New York State Department of Environmental Conservation (NYSDEC) Wildlife Office at 845-256-3098 or Wildlife.R3@dec.ny.gov, and the United States Fish and Wildlife Service (USFWS) New York Field Office at 607-753-9334, must be contacted with 24 hours if a bog turtle is found on the premises. Please provide the location, the project name, and an explanation of

POST-CONSTRUCTION – FOR WORKERS, MAINTENANCE STAFF, & the PUBLIC

• All staff will be provided with a copy of the Davidson Drive Holdings, LLC-BTEEP. • A copy of the Davidson Drive Holdings, LLC-BTEEP will be available on-site at the office. • Copies of the Davidson Drive Holdings, LLC-BTEEP will be provided to maintenance staff Bog Turtle Education & Encounter Plan for Davidson Drive Holdings, LLC

Procedure for Bog Turtle Encounter and Relocation

• In the event that a bog turtle is found on site:

- . Activities will cease immediately (e.g. mowing). 2. Residents and/or staff are not to touch the turtle. The turtle is not to be collected
- or persecuted. 3. Turtles can only be moved by a qualified biologist with knowledge of bog turtles
- and relocation procedures, who is licensed by the NYSDEC to handle bog turtles. 4. Residents or staff should contact a qualified biologist to safely move the bog turtle back into the wetland.

Contact Information for Qualified Biologist: Michael Nowicki at 203-910-4716

- 5. Activities will not re-commence until the permitted person arrives at the site to move the bog turtle to a safe area. The resident or staff should monitor the
- location of the turtle until it is removed back to the wetland. 6. In addition, if a bog turtle is found on the premises, the New York State Department of Environmental Conservation (NYSDEC) Wildlife Office at 845-256-3098 or Wildlife.R3@dec.ny.gov, and the United States Fish and Wildlife Service (USFWS) New York Field Office at 607-753-9334, must be contacted with 24 hours. Please provide the location, the project name, and an explanation of the

Mitigation Measures

incident.

- 7. Lawn fertilizer shall be applied at the manufacturer's recommended time of year, but not after December 1st for fall applications or before April 1st for spring
- applications. 8. Lawn fertilizers, pesticides and herbicides shall be applied per the manufacturer's recommendations and shall be applied at the minimum rate needed to accomplish
- the intended use. 9. Lawn fertilizers, pesticides and herbicides applied or spilled on impervious surfaces, such as driveways or walkways, shall be cleaned up and properly disposed to prevent runoff into drains or waterways.

FOR ADDITIONAL INFORMATION ON BOG TURTLES, REFER TO THE FOLLOWING **RESOURCES:**

- NYSDEC Bog Turtle Fact Sheet (<u>www.dec.ny.gov/animals/7164.html</u>)
- NY Natural Heritage Program Animal Guidance (<u>www.acris.nynhp.org/guide.php?id=7507</u>) • US Fish and Wildlife Service New York Field Office Bog Turtle Website (https://www.fws.gov/northeast/nyfo/es/bogturtle.htm)
 - REVISION BY DATE DESCRIPTION MM 8/7/23 SITE RE-DESIGN 4. MM 2/6/23 PH CONSULTANT COMMENTS 3. MM 1/17/23 PUBLIC HEARING COMMENTS 2. MM 3/21/22 DEC EMAIL DATED 03/11/22 1 CHAEL A. MORGANTE, P.E

LIC. NO. 78577

TOWN OF CHESTER PLANNING BOARD APPROVAL

COPYRIGHT 2021, ARDEN CONSULTING ENGINEERS, P.L.L.C. – ALL RIGHTS RESERVED

